


FIRST ANGLE PROJECTION

(ALL DIMENSIONS ARE IN mm)

THE INFORMATION ON THIS DOCUMENT IS THE PROPERTY OF BHARAT HEAVY ELECTRICALS LIMITED  
IT MUST NOT BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO THE INTEREST OF THE COMPANY

REV.	DATE	ALTERED	REV.	DATE	ALTERED	ADDITIONAL INFORMATION			
		CHECKED			CHECKED	STATUS OF DRAWING			
		APPROVED			APPROVED	DISTRIBUTION OF PRINTS	SWE	SWM	TCX
							1	3	1

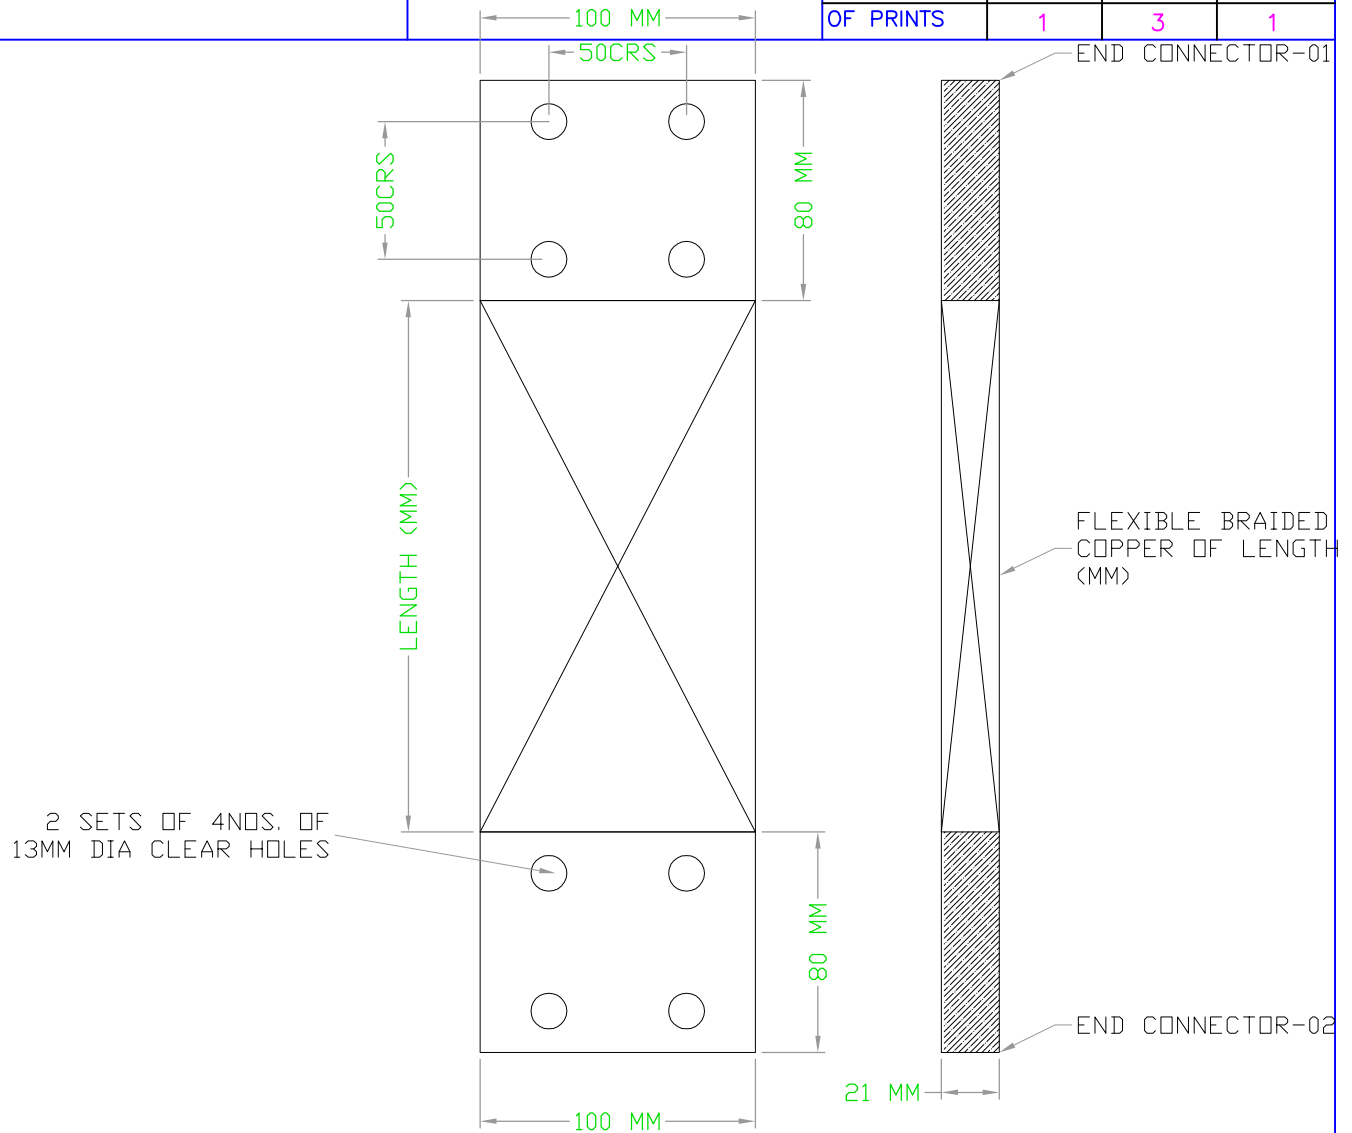

1. CONDUCTIVITY OF BRAIDED FLEXIBLE COPPER AND END CONNECTOR SHOULD BE > 95% IACS.
2. ENTIRE LENGTH OF FLEXIBLE COPPER AND END CONNECTORS ARE TIN PLATED.

65	75	25	27	29	58	59	34	45	55	56	58	65
REMARKS	ITEM NO.	DESCRIPTION			STD	ETP COPPER		UNIT	KG.	-		
	001	100MM X 21MM X L MM LEN								002		
							MATL. CODE				UNIT WT.	
							MATL. SPCN.				QTY.	

28 → CARD TYPE-3      28 → CARD TYPE-1      28 → CARD TYPE-2



HAKjr gsoh bysDV&hdYl fyfeVsM  
HAKsiky  
BHARAT HEAVY ELECTRICALS LTD.  
BHOPAL

uke NAME	glrk SIGN	fnuqkd DATE	osfj dh la;k NO. OF VAR.
cuk;k DRN SNK		06-01-14	
tkapk CKD MMR			
vugeksfmr APPD NB			

foHAKx DEPT	wu Vky uki dh Js.kh UNTOL.DIMS. GR.	vujqr SCALE	HAKj fd_xk WEIGHT (K.G.)	vis_M&kbZax dk lanHAZ REF. TD ASSY. DRG.	en d ITEM NO.	en la;k NO. OF ITEM
dkSM CODE	SWE AA 409 0230208 M	1:1	-	-	001	001

'Ah"AZHOLE	vkjs[A d-DRAWING NO.	iquREV.
<b>BRAIDED FLEXIBLE COPPER CONNECTOR</b>	-	00
(33KV/40KA BUS ISOLATOR)	i="B d-SOT. No. 01	i="Bkso dh la;k NO. OF SHT. 01

REF. DRG. NO.

SIGN. & DATE

INVENTORY NO.