


## **Technical Specification for Enquiry No. E-7130543**

1. SUPPLY & INSTALLATION OF CONCERTINA COILS 610MM DIAMETER WIRE OF SHORT PROFILE WITH HTGS SPRING COREWIRE OF DIAMETER 2.59MM PITCH BETWEEN THE BARB 24.5 MM. TAPE WILL BE HOT DIP GALVANISED UPTO 20 MICRONS. WEIGHT OF EACH COIL SHOULD BE 7.5 TO 8KG TAPE TO BE 0.5MM THK. TENSILE STRENGTH WILL BE 1600N/MM<sup>2</sup> (MINIMUM) NUMBER OF SPIRAL TURNS PER COIL IS MINIMUM 50. SHORT BLADED PROFILE OF MINIMUM BLADE LENGTH 11MM AND WIDTH BEFORE CRIMPING IS 18MM MINIMUM INCLUDING DOVETAIL CLIPS @ 5 CLIPS PER 2 SPIRAL TURNS APPROX 125 CLIPS PER COIL.
  - A. **Qty:** 2000 Mtr.
  - B. **Delivery Required in Nov.-13**
  - C. Erection & Commissioning is required within 04 months from the date of our call for commissioning.
  - D. You have indicated E&C charges separately in your offer. Please note that as per our requirement E&C charges should be equal or more than 20% of basic value of item. Please confirm your quoted E&C charges is as per our requirement. If not, please confirm that payment as per clause no. 8.4 is acceptable to you.
  - E. Test Certificate is required along with supply.
  - F. Material should conform to IS: 4454 Part-I

E 7130543

(5)

Supply and Fixing of 600 mm dia Punched Tape Concertina Coil on vertical angle of 2 feet with support of two strands of Razor Wire

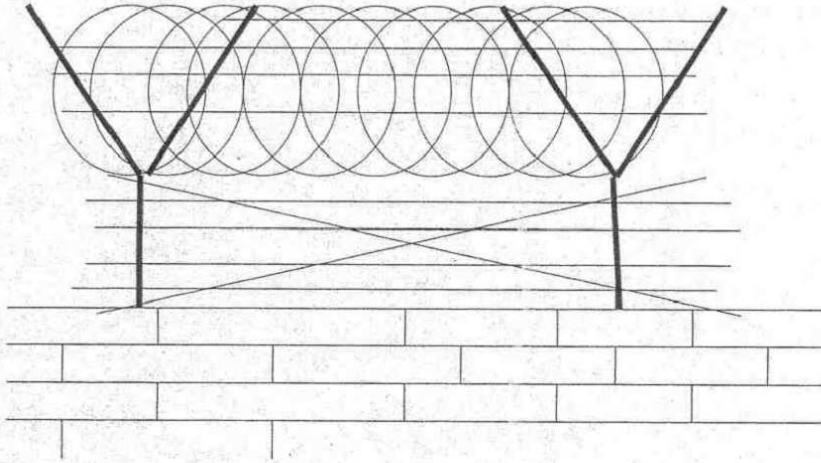

*J. S. S.*