

BHARAT HEAVY ELECTRICALS LIMITED

TRANSMISSION PROJECTS ENGINEERING MANAGEMENT

DOCUMENT No.	TB-376-510-002	Rev. No.	00	Prepared	Checked	Approved
TYPE OF DOC.	TECHNICAL SPECIFICATION	NAME	AA	RD	VK	
TITLE	800kV CURRENT TRANSFORMER	SIGN	-Sd-	-Sd-	-Sd-	
		DATE	08-01-15	08-01-15	08-01-15	
		GROUP	TBEM	W.O. No	84006	
CUSTOMER	UPPTCL					
CONSULTANT	Power Grid Corporation of India Ltd.					
PROJECTS	765kV/400kV Agra UPPTCL(New) Substation associated with transmission system for evacuation of power from Lalitpur TPP					

CONTENTS

Section	Description	No. of Sheets
1.	SCOPE, SPECIFIC TECHNICAL REQUIREMENTS & BILL OF QUANTITIES	5
2.	DETAILED TECHNICAL REQUIREMENTS – EQUIPMENT SPECIFICATION	13
3.	PROJECT DETAILS AND GENERAL SPECIFICATION (including Annexures)	
4.	SCHEDULE OF GUARANTEED TECHNICAL PARTICULARS (TO BE SUBMITTED AT CONTRACT STAGE)	4
5.	CHECK LIST (TO BE FILLED AT TENDER STAGE)	5

COPYRIGHT AND CONFIDENTIALITY
The information on this document is the property of BHARAT HEAVY ELECTRICALS LTD. It must not be used directly or indirectly in any way detrimental to the interest of the company

01	02-02-15	AA <i>[Signature]</i>	RD <i>[Signature]</i>	VK <i>[Signature]</i>	a) Additional Spares included b) QR revised as per Powergrid Amendment 4				
Rev No.	Date	Altered	Checked	Approved	REVISION DETAILS				
				Distribution	TBMM	TBQM	TBCM	TBTS	
				Copies	2	-	-	-	

SECTION 1

SCOPE, SPECIFIC TECHNICAL REQUIREMENTS AND QUANTITIES

1.0 SCOPE

This technical specification covers the requirements of design, manufacture, testing at works, packing and dispatch of Current Transformers complete with accessories as listed in clause 5.0 below. This section covers the specific technical requirements of 800KV CT.

The specification comprise of following sections:

Section-1: Scope, Specific Technical Requirements & Bill of Quantities

Section-2: Detailed Technical Requirement - Equipment Specification

Section-3: Project Details & General Technical Requirements

Section-4: Guaranteed Technical Particulars

Section-5: Checklist

In case of any conflict between various sections, order of precedence shall be in the same order as listed above.

1.1 The equipment is required for the following Projects.

Name of Customer : UPPTCL

Name of Consultant : Power Grid Corporation of India Ltd.

Name of the Project : 765kV/400kV Agra UPPTCL(New) Substation associated with transmission system for evacuation of power from Lalitpur TPP

Refer Section - 3 for Project Details and General Specifications.

2.0 SPECIFIC TECHNICAL PARTICULARS

a. Technical Parameters of 765KV CT:

S.No.	Description of parameters	Data
1.	Max. System Volatge	800V
2.	System Fault Level	40 kA for 1(one) Sec.
3.	Rated frequency	50 Hz
4.	One minute power frequency dry withstand voltage : Between line terminals and ground	975kV rms
5.	Corona Extinction Voltage	508kV rms (min)
6.	Max. Radio interference voltage for frequency between 0.5MHz and 2 MHz at 508kV rms	2500 micro volts
7.	Design Ambient Temp.°C	50
8.	Rated Insulation levels a. Full Insulation levels : - between line terminals and ground	± 2100 kV peak
9.	b. Switching impulse withstand voltage (250/2500 microsecond) dry and wet	± 1550 kV peak

	- between line terminals and Ground	
10.	Seismic acceleration	0.3g horizontal
11.	Partial Discharge	As per IEC 60044-5

b. Core Parameters :

Core No.	Current Ratio	Accuracy Class	Output Burden VA	Min kPV (V)	Max RCT in Ohms	Max Im at kPV (mA)	Purpose
1	3000-2000-500 / 1	TPS	-	3000-2000-500	15/10/2.5	20-30-120	BUS DIFF. CHECK
2	3000-2000-500 / 1	TPS	-	3000-2000-500	15/10/2.5	20-30-120	BUS DIFF. MAIN
3	3000-2000-500 / 1	0.2S 0.2S 0.2S	20 20 20	-	-	-	METERING
4	3000-2000-500 / 1	0.2S 0.2S 0.2S	20 20 20	-	-	-	METERING
5	3000-2000-500 / 1	TPS	-	3000-2000-500	15/10/2.5	20-30-120	TRANS.BACKUP/ LINE PROT N
6	3000-2000-500 / 1	TPS	-	3000-2000-500	15/10/2.5	20-30-120	TRANSF. DIFF. / LINE PROT N.

For detailed Technical requirements refer Section-II of the technical Specification

3.0 QUALIFYING REQUIREMENTS:

3.1 a) Route-1

The manufacturer(s) whose 765 kV Instrument transformers are offered, should have designed, manufactured, type tested (as per IEC/IS or equivalent standard) or 40kA or above fault level (fault level applicable for current transformer only) and supplied 715 kV or above class Instrument transformers, which are in operation for at least two (2) years as on the originally scheduled date of bid opening.

And wherever the specified fault level of the Current transformers is more than 40kA, in addition to the above, the offered Current transformers should have been designed, manufactured and type tested to the specified fault level as on the originally scheduled date of bid opening.

Further, a legally enforceable undertaking jointly by the bidder and manufacturer shall be furnished along with the bid to guarantee quality, timely supply, and performance of the 765 KV Instrument Transformer.

The Bidder or his proposed manufacturer for 765kV class Instrument transformers should have repair and maintenance facilities for these equipments in India. The repair and maintenance facilities shall be such that the equipment can be repaired and maintained without necessitating it to be taken outside the country.

In case the bidder or his proposed manufacturer is not having these facilities, he shall be required to supply 5% of total quantity(package-wise sum total of quantities for all substations), rounded off to the next higher integer, of Instrument transformers to be supplied in the respective package, subject to a minimum of 3 Nos of each type and rating of Instrument transformers as additional spares (excluding mandatory spares) in lieu of repair and maintenance facilities for 765 kV Instrument transformers.

OR

Route-2

765 kV Instrument Transformers can also be offered from Instrument transformers manufacturer(s) who have established production line in India based on technological support of a parent company or collaborator company for 715 kV or above class Instrument transformers provided that :-

- (i) such manufacturer(s) have manufactured and type tested 765 kV Instrument transformers or above (as per IEC/IS or equivalent standard) to the system fault level of 40 kA/ 50 kA/ 63 kA (fault level as applicable for current transformer only).
- (ii) the parent company (Principal) or collaborator meets qualifying requirements stipulated under **3.(i) Route-1** given above.

(iii) the manufacturer furnishes (jointly with parent company or collaborator)

- (a) A legally enforceable undertaking to guarantee quality, timely supply, performance and warranty obligations as specified for the equipment(s)

AND

- (b) Furnishes a confirmation letter from the parent company or collaborator (as applicable) along with the bid stating that parent company or collaborator (as applicable) shall furnish performance guarantee for an amount of 10% of the cost of such equipment(s). This performance guarantee shall be in addition to contract performance guarantee to be submitted by the Bidder

AND

- (c) A legally enforceable undertaking jointly by the bidder and manufacturer for warranty obligations for four (4) years for the entire quantity to be supplied, is to be submitted along with the bid.

OR

Route-3

765kV Instrument transformers can also be offered from Indian manufacturers (a manufacturing company registered in India under company act 1956) who have designed , manufactured, type tested (as per IEC/IS or equivalent standard) for 40kA or above fault level (fault level is applicable for current transformers only) and supplied 345 kV or above class Instrument transformers, which are in operation for at least two (2) years as on the originally scheduled date of bid opening and have manufactured and type tested to the fault level of 40kA/50kA/63kA(fault level as applicable, for current transformers only) 765 kV or above Instrument transformers as per IEC/IS or equivalent standard, as on originally scheduled date of bid opening;

Provided that:

A legally enforceable undertaking jointly by the BHEL and manufacturer is furnished along with the bid to guarantee quality, timely supply and performance of 765kV Instrument transformers and to provide warranty obligations for four (4) years for the entire quantity to be supplied, and

a confirmation letter from the manufacture is submitted along with the bid stating that they shall furnish performance guarantee for an amount of 10 % of the ex works cost of the Instrument transformers. This performance guarantee shall be in addition to the contract performance guarantee to be submitted by the bidder.

- 3.1 b)** BHEL shall furnish an undertaking from 765kV Instrument transformers manufacturer that Erection ,testing and commissioning of 765kV class Instrument transformers shall be carried out under the supervision of 765kV Instrument transformers manufacturer and after sales services & spares shall remain available for at least fifteen (15) years from the date of supply.

4.0 PRECOMMISSIONING, COMMISSIONING, TRIAL-RUN & COMPLETION

a. **PRECOMMISSIONING:**

An indicative list of tests is specified in Section –II , 9.0

The bidder shall perform any additional tests based on specialties of the items as per field Q.P / Instructions of equipment supplier without any extra cost to BHEL / Customer. The bidder shall arrange all special instruments required for conducting these tests along with calibration certificates and shall furnish the list of instruments for approval.

“Commissioning checks”,” installation checks”,” Site tests” wherever mentioned in the Specification shall be considered as pre-commissioning checks.

b. **TRIAL-RUN :**

Operation of the facilities or any part thereof by BHEL immediately after the Commissioning for a continuous period of 72(Seventy two) hours. In case of interruption due to problem /failure in the equipment, the equipment manufacturer shall rectify the problem and after rectification, continuous 72 (Seventy two) hours period shall start after such rectification.

c. **COMPLETION :**

Upon successful completion of Trial-run.

Please note:- The respective dates of commencement of erection, pre-commissioning , commissioning and trial –run activity by BHEL will be intimated to the equipment manufacturer from time to time , so that arrangements for supervising the activity can be made accordingly by the manufacturer .

(however, the travel, lodging and boarding expenses for each visit of the bidder’s engineers shall be borne by the bidder.)

5.0 BILL OF QUANTITY:

S. No.	Description	Unit	Total Quantity
1.	765KV,3000A ,40kA with 120% extended current rating , 1ph Current Transformer complete in all respect Excluding support structure, clamps & connectors and Junction Box.	No.	24
2.	<u>Mandatory Spare:</u> 3000 A, 40kA CT with 120% extended current rating, Complete CT.	No.	1
3.	<u>Additional Spares :</u> 3000 A, 40kA CT with 120% extended current rating, Complete CT.	No.	3*
4.	Supervision of Erection	Lot	1
5.	Supervision of Testing (Pre-Commissioning)	Lot	1
6.	Supervision of Commissioning	Lot	1

Note: The current transformer support structure, clamps & connectors and Junction Box are excluded from scope of supply.

*Additional Spares as per clause 3.1a shall be considered if applicable.

6.0 TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICATE

- a. All equipment being supplied shall conform to type tests as per technical specification and shall be subject to routine tests in accordance with requirements stipulated under 6.0 of section II.
- b. The reports for all type tests as per technical specification shall be furnished by the bidder along with equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all project with similar requirement. The type tests conducted earlier should have either been conducted in accredited laboratory (accredited based on ISO / IEC Guide 25 / 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab or reputed consultant.
- The test reports submitted shall be of the tests conducted within last 10 (ten) years prior to the date of bid opening (05-09-2014). In case the test reports are of the test conducted earlier than 10 (ten) years prior to the date of bid opening, the bidder shall repeat these test(s) at no extra cost to BHEL.
- However the following type tests should have been conducted within 5 (five) years prior to the date of bid opening(05/09/14)
- i) Lightning Impulse Test
 - ii) Switching Impulse Test
 - iii) Multiple Chopped Impulse Test (For CT)
 - iv) Chopped Impulse Test (For CVT)
- In case the test reports of the tests mentioned above are conducted earlier than 5 (five) years prior to the date of bid opening, the bidder shall repeat these test(s) at no extra cost to the BHEL.
- In the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/manufacturing changes (including substitution of components) or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Purchaser.
- The supplier shall intimate the BHEL/POWERGRID the detailed program about the tests atleast two (2) weeks in advance in case of domestic supplies & six (6) weeks in advance in case of foreign supplies.
- In case type tests are to be conducted /repeated and deputation of Inspectors/Purchasers representative is required ,then all expenses shall be borne by Bidder.

7.0 SPECIAL TOOLS AND TACKLES :

The bidder shall include in his proposal the deployment of all special tools and tackles required for erection , testing commissioning and maintenance of the equipment .The **Special tools and tackles shall only cover items which are specifically required for the equipment offered and are proprietary in nature.** A list of all such devices shall be furnished. In addition to this the bidder shall also furnish a list of special tools and tackles required to used during the operation of the equipment.

8.0 DEVIATIONS :

The bidder shall list all the deviation from the specification separately. Offers without specific deviation will be deemed to be totally in compliance with the specification and NO DEVIATION on any account will be entertained at a later date.

SECTION-II
765KV CURRENT TRANSFORMER

1.0 GENERAL:

1.1 The instrument transformers and accessories shall conform to the latest version of the standards specified below except to the extent explicitly modified in the specification and shall be in accordance with the requirements in Section- III

Current Transformers: IEC: 60044-1 (or IS: 2705)

Capacitive Voltage Transformers: IEC: 60044-5 / IEC-60358

Inductive Voltage Transformers: IEC: 60044-2

1.2 The instrument transformers shall be complete with its terminal box and a common marshalling box for a set of 3 instrument transformers.

1.3 The external surface of instrument transformer, if made of steel, shall be hot dip galvanized or painted as per Section III **External surface of aluminum can have natural finish.**

1.4 The impregnation details alongwith tests/checks to ensure successful completion of impregnation cycle shall be furnished for approval.

1.5 The instrument transformers shall be designed for use in geographic and meteorological conditions as given in Section- III

2.0 CONSTRUCTION FEATURES:

The features and constructional details of instrument transformers shall be in accordance with requirements stipulated hereunder:

- 2.1
- a) Instrument transformers shall be of 800/420/245/145 kV class, oil filled/ SF6 gas filled, suitable for outdoor service and upright mounting on steel structures. 420/245/145 kV Instrument transformers and 800 kV CVT shall be with shedded porcelain/ polymer bushings/Insulators However, 800kV CTs shall be acceptable only with polymer Insulator.
 - b) Bushings/Insulators shall conform to requirements stipulated in Section- III The bushing/insulator for CT shall be one piece without any metallic flange joint.
 - c) **Oil filling and drain plugs, oil sight glass shall be provided for CT & IVT. Oil sight glass shall be provided for electromagnetic unit of CVT.** The Instrument transformer shall have cantilever strength of not less than 500 kg, 500 kg, 350 kg and 350 kg respectively for 800/420/245/145 kV Instrument

transformers. For CVT/IVT with polymer housing, the cantilever strength shall not be less than 150kg. Oil filling and drain plugs are not required for SF6 gas filled CT/IVT.

- d) Instruments transformers shall be hermetically sealed units. Bidder/Manufacturer shall furnish details of the arrangements made for the sealing of instrument transformers *during detailed engineering*.

Bidder/Manufacturer shall also furnish the details of site tests to check the effectiveness of hermetic sealing for approval.

- e) Polarity marks shall indelibly be marked on each instrument transformer and at the lead terminals at the associated terminal block.
- f) In case of SF₆ filled CTs/Inductive VTs, it shall be provided with a suitable SF₆ gas density monitoring device, with NO/NC contacts to facilitate the remote annunciation and tripping in case of SF₆ leakage. Provisions shall be made for online gas filling. Suitable rupture disc shall be provided to prevent explosion.

2.2 **Terminal box/Marshalling Box:**

Terminal box shall conform to the requirements of Section- III

2.3 **Insulating Oil:**

- a) Insulating oil to be used for instrument transformers shall be of EHV grade and shall conform to IS-335 / IEC - 60296 (required for first filling). Non-PCB based synthetic insulating oil conforming to IEC 60867 **shall** also be used in the capacitor units of CVT.
- b) The SF₆ gas shall comply with IEC-60376, 60376A and 60376B and shall be suitable in all respects for use in the switchgear under operating conditions.

2.4 **Name Plate:**

Name plate shall conform to the requirements of IEC incorporating the year of manufacture. The rated current, extended current rating in case of current transformers and rated voltage, voltage factor in case of voltage transformers shall be clearly indicated on the name plate. The rated thermal current in case of CT shall also be marked on the name plate.

The intermediate voltage in case of capacitor voltage transformer shall be indicated on the name plate.

3.0 **CURRENT TRANSFORMERS:**

- a) Current transformers shall have single primary either ring type, or hair pin type and suitably designed for bringing out the secondary terminals in a weather proof (IP 55) terminal box at the bottom. PF Terminal for

measurement of tan delta and capacitance of the unit shall be provided. These secondary terminals shall be terminated to stud type non disconnecting terminal blocks inside the terminal box. In case "Bar primary" inverted type current transformers are offered the manufacturer will meet following additional requirements:

- (i) The secondaries shall be totally encased in metallic shielding providing a uniform equipotential surface for even electric field distribution.
 - (ii) The lowest part of the insulation assembly shall be properly secured to avoid any risk of damage due to transportation stresses.
 - (iii) The upper part of insulation assembly resting on primary bar shall be properly secured to avoid any damage during transportation due to relative movement between insulation assembly & top dome.
 - (iv) Nitrogen if used for hermetic sealing (in case of live tank design) should not come in direct contact with oil.
 - (v) Bidder/Manufacturer shall recommend whether any special storage facility is required for spare CT.
- b) Different ratios specified shall be achieved by secondary taps only and primary reconnection shall not be accepted.
 - c) Core lamination shall be of cold rolled grain oriented silicon steel or other equivalent alloys. **μ metal or nano-crystalline core can also be used for metering cores.**
 - d) The expansion chamber at the top of the porcelain insulators should be suitable for expansion of oil.
 - e) Facilities shall be provided at terminal blocks in the marshalling box for star delta formation, short circuiting and grounding of CT secondary terminals.
 - f) Current transformer's guaranteed burdens and accuracy class are to be intended as simultaneous for all cores.
 - g) The rated extended currents for 800 kV and 420 kV class Current transformers shall be as given below:

* CT Junction Box is not in scope of supply

Tap Ratio	800kV, 3000A	400kV, 3000A
	Rated extended currents in % of rated current	
500/1	200	200
1000/1	---	---
2000/1	180	180
3000/1	120 (200 for 15 min)	120

The secondary winding shall be rated for 2A continuously.

Further, the intermediate tapping at 3000-2000 of metering core of 3000 A rated 400 kV and 800 kV CTs shall be suitable for using as 1000/1 ratio. The Auxiliary reactor as referred at wiring diagram No.0000-000-T-E-L-028 shall be suitable for connecting to the selected taps. The requirements of 3000A CTs are given at TABLE II-A.

For 245/145 kV class CTs, the rated extended primary current shall be 120% (or 150% if applicable) on all cores of the CTs as specified in the Section - I

- h) For 800/420/245/145 kV current transformer, characteristics shall be such as to provide satisfactory performance of burdens ranging from 25% to 100% of rated burden over a range of 5% to 120%(or specified rated extended current whichever is higher) of rated current in case of metering CTs and up to the accuracy limit factor/knee point voltage in case of relaying CTs.
- i) The current transformer shall be suitable for horizontal transportation. It shall be ensured that the CT is able to withstand all the stresses imposed on it while transporting and there shall be no damage in transit. The Contractor shall submit the details of packing design to the Purchaser for review.
- j) For 800 kV CTs the instrument security factor at all ratios shall be less than ten (10) for metering core. For 420/245/145 kV CTs the instrument security factor at all ratios shall be less than five (5) for metering core. If any auxiliary CTs/reactor are used in the current transformers then all parameters specified shall have to be met treating auxiliary CTs as an integral part of the current transformer. The auxiliary CTs/reactor shall preferably be inbuilt construction of the CTs. In case these are to be mounted separately these shall be mounted in the central marshalling box suitably wired upto the terminal blocks.
- k) The wiring diagram plate for the interconnections of the three single phase CTs shall be provided inside the marshalling box. A typical

wiring diagram No. 0000-000-T-E-L-028 (Sh. 1 & 2) is enclosed herewith **at Annexure-I** to be followed by the Bidder/Manufacturer.

- l) The current transformers should be suitable for mounting on lattice support structure (for 800 kV) or pipe structure (for 420 kV and below) to be provided by the Contractor in accordance with stipulations of Section- III
- m) The CT shall be so designed as to achieve the minimum risks of explosion in service. Bidder/Manufacturer shall bring out in his offer, the measures taken to achieve this.
- n) 800/420/245/145 kV current transformers shall be suitable for high speed auto reclosing.

5.0 TERMINAL CONNECTORS: (NOT IN SCOPE OF SUPPLY)

The terminal connectors shall meet the requirements as given in Section-GTR.

6.0 TESTS:

6.1 In accordance with the requirements in Section- III , Current and Voltage Transformers should have been type tested and shall be subjected to routine tests in accordance with IEC:60044-1/IS:2705 and IEC: 60044-5/60044-2 respectively.

6.2 The test reports of the type tests and the following additional type tests (additional type tests are required for Instrument Transformers, rated above 72.5 kV only) shall also be submitted for the Purchaser's review.

a) **Current Transformers:**

i) **Corona test as per Annexure-A of Section- III and RIV test as per IEC-61869-1.**

ii) **Seismic withstand test as per Annexure-B of Section- III**

- iii) Thermal stability test, i.e. application of rated voltage and rated extended thermal current simultaneously by synthetic test circuit. (not applicable for SF6 filled CT)
- iv) Thermal co-efficient test i.e. measurement of tan delta as a function of temperature (at ambient and between 80°C & 90°C) and voltage (at 0.3, 0.7, 1.0 and 1.1 $U_m/\sqrt{3}$) (not applicable for SF6 filled CT)
- v) The current transformer shall be subjected to Multiple chopped impulse test (not applicable for SF6 filled CT) to assess the CT performance in service to withstand the high frequency over voltage generated due to closing & opening operation of isolators. The method as per **IEC: 61869-1** may be followed with the application of 600 chopped impulses.

6.3 The current and voltage transformer shall be subjected to the following routine tests in addition to routine tests as per IEC/IS.

a) CURRENT TRANSFORMERS:

ROUTINE TESTS:

For Oil filled CTs:

- i) Measurement of Capacitance.**
- ii) Oil leakage test.**

iii) Measurement of tan delta at 0.3, 0.7, 1.0 and 1.1 Um/√3.

For SF6 filled CTs:

i) Dew point measurement

ii) SF6 alarm/ lockout check.

iii) SF6 gas leakage test: Gas leakage rate shall be maintained within 0.2% per annum.

7.0 SPARE PARTS AND MAINTENANCE EQUIPMENT:

The Bidder shall include in his proposal spare parts equipment in accordance with Section-Project.

BB. TECHNICAL PARAMETERS FOR 800 kV CT:

BB.i	Rated Primary current	3000A
BB.ii	Rated short time thermal current	40 kA for one (1) second
BB.iii	Rated dynamic current	102 kA (peak)
BB.iv	Maximum temperature rise over design ambient temperature	As per IEC: 60044-1
BB.v	One minute power frequency withstand voltage sec. terminal & earth	5 kV

BB.vi	Number of terminals	All terminals of control circuits are to be wired up to marshaling box plus 20% spare terminals evenly distributed on all TBs.
BB.vii	Class of insulation	A

800 kV Current transformers shall also comply with requirements of Table - II.

9.0 PRE-COMMISSIONING TESTS

9.1 An indicative list of tests is given below. Contractor shall perform any additional test based on specialties of the items as per the field Q.P./Instructions of the equipment Supplier or Purchaser without any extra cost to the Purchaser. The Contractor shall arrange all instruments required for conducting these tests alongwith calibration certificates and shall furnish the list of instruments to the Purchaser for approval.

9.2 Current Transformers

- (a) Insulation Resistance Test for primary and secondary.
- (b) Polarity test
- (c) Ratio identification test - checking of all ratios on all cores by primary injection of current.
- (d) Dielectric test of oil (wherever applicable).
- (e) Magnetizing characteristics test.
- (f) Tan delta and capacitance measurement
- (g) Secondary winding resistance measurement
- (h) Contact resistance measurement (wherever possible/accessible).
- (i) Test for SF6 (for SF6 filled CTs) – Dew point measurement, SF6 alarm/ lockout check.
- (j) DGA test of oil.




Dissolved gas analysis to be carried out at the time of commissioning. CTs must have adequate provision for taking oil samples from the bottom of the CT without exposure to atmosphere. Bidder/Manufacturer shall recommend the frequency at which oil samples should be taken and norms for various gases in oil after being in operation for different durations. Bidder/Manufacturer should also indicate the total quantity of oil which can be withdrawn from CT for gas analysis before refilling or further treatment of CT becomes necessary.

TABLE-II

REQUIREMENTS FOR 800 KV CURRENT TRANSFORMERS

No. of Cores.	Core No.	Application	Current Ratio	Output Burden (VA)	Accuracy Class	Min. Knee Pt. Voltage (Vk)	Max. CT Sec. wdg. Resistance (in Ω)	Max. Excit. Current at Vk (in mA)
6	1	BUS DIFF. CHECK	3000/ 2000/ 500/1	-	TPS*	3000/ 2000/ 500	15/10/2.5	20 on 3000/1 TAP; 30 on 2000/1; 120 on 500/1 tap
	2.	BUS DIFF. MAIN	3000/ 2000/ 500/1	-	TPS*	3000/ 2000/ 500	15/10/2.5	20 on 3000/1 TAP; 30 on 2000/1; 120 on 500/1 tap
	3.	METERING	3000/ 2000/ 500/1	20 20 20	0.2S 0.2S 0.2S	- - -	-	- - -
	4.	METERING	3000/ 2000/ 500/1	20 20 20	0.2S 0.2S 0.2S	- - -	-	- - -
	5.	TRANSF DIFF./ LINE PROT.N.	3000/ 2000/ 500/1	-	TPS*	3000/ 2000/ 500	15/10/2.5	20 on 3000/1 TAP; 30 on 2000/1; 120 on 500/1 tap
	6	LINE PROT.N/LBB PROT.N.	3000- 2000- 500/1	-	TPS*	3000/ 2000 500	15/10/2.5	20 on 3000/1 Tap,30 on 2000/1 Tap,120 on 500/1 Tap

Note 1. * All Protection Cores shall be of accuracy class TPS as per IEC 60044-6.
 2. Metering Core shall be of accuracy class 0.2S as per IEC: 60044-1

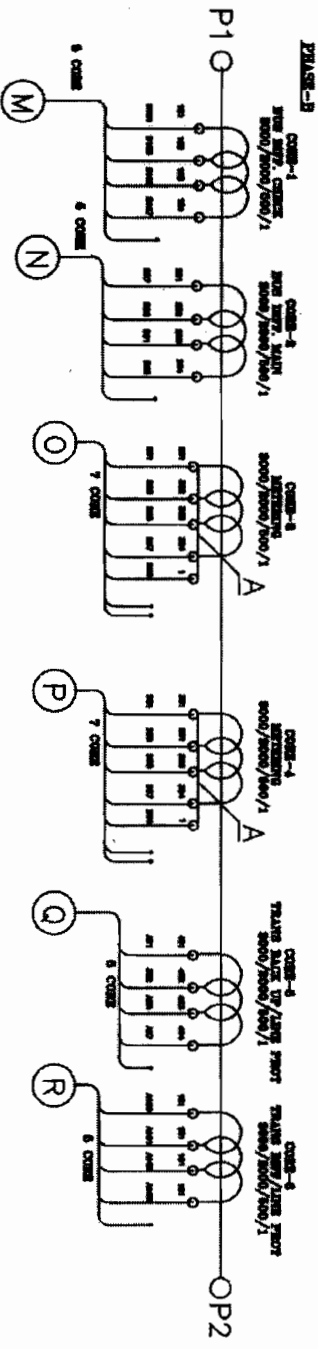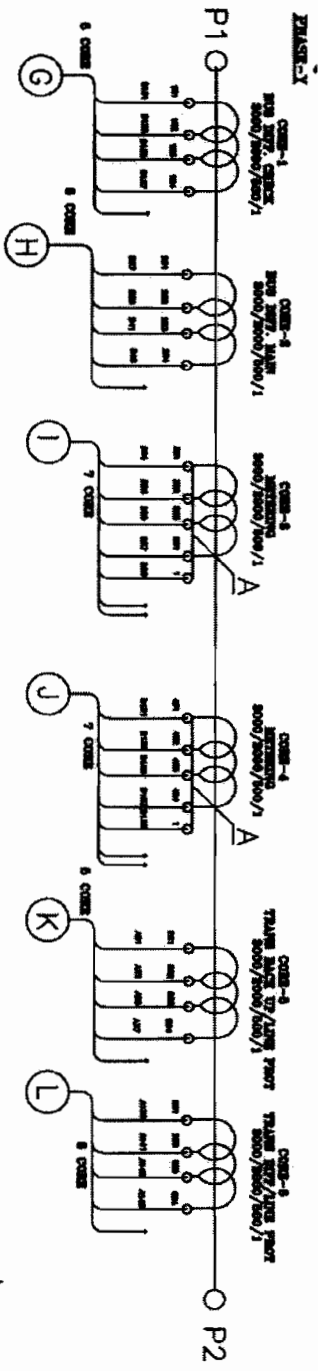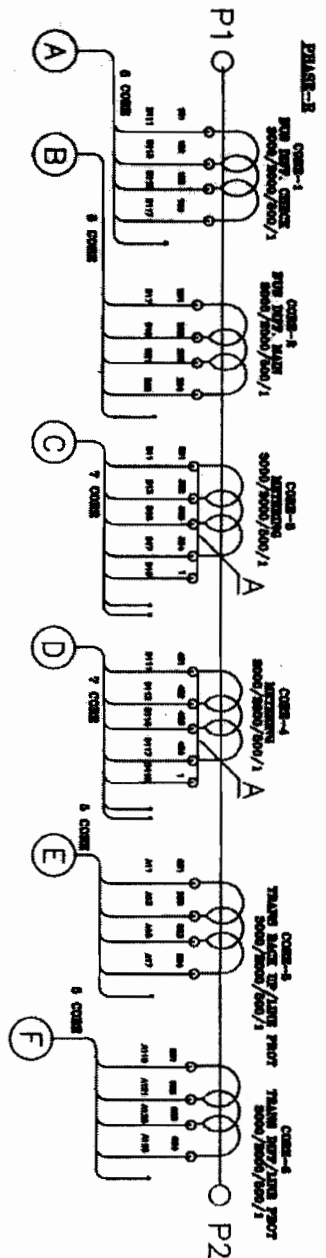

NOTE
 1. INTERPOLE CABLING (A) TO (R) 2.5 SQ.MM STRANDED FLEXIBLE ARMOURD COPPER CABLE OF 1100V GRADE (FROM CT SEC TO MARSHALLING BOX).



FOR TENDER PURPOSE ONLY

POWER GRID CORPORATION OF INDIA LIMITED
 (A Government of India Enterprise)

PROJECT : STANDARD

TITLE: WIRING DIAGRAM OF MARSHALLING BOX FOR 760KV/400KV CT

Drawing No.: 0000-000-3-3-1-000 PAGE 1 OF 3 SHEET 1	REV. 1
---	--------

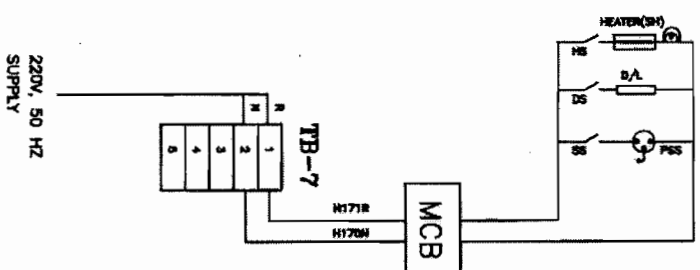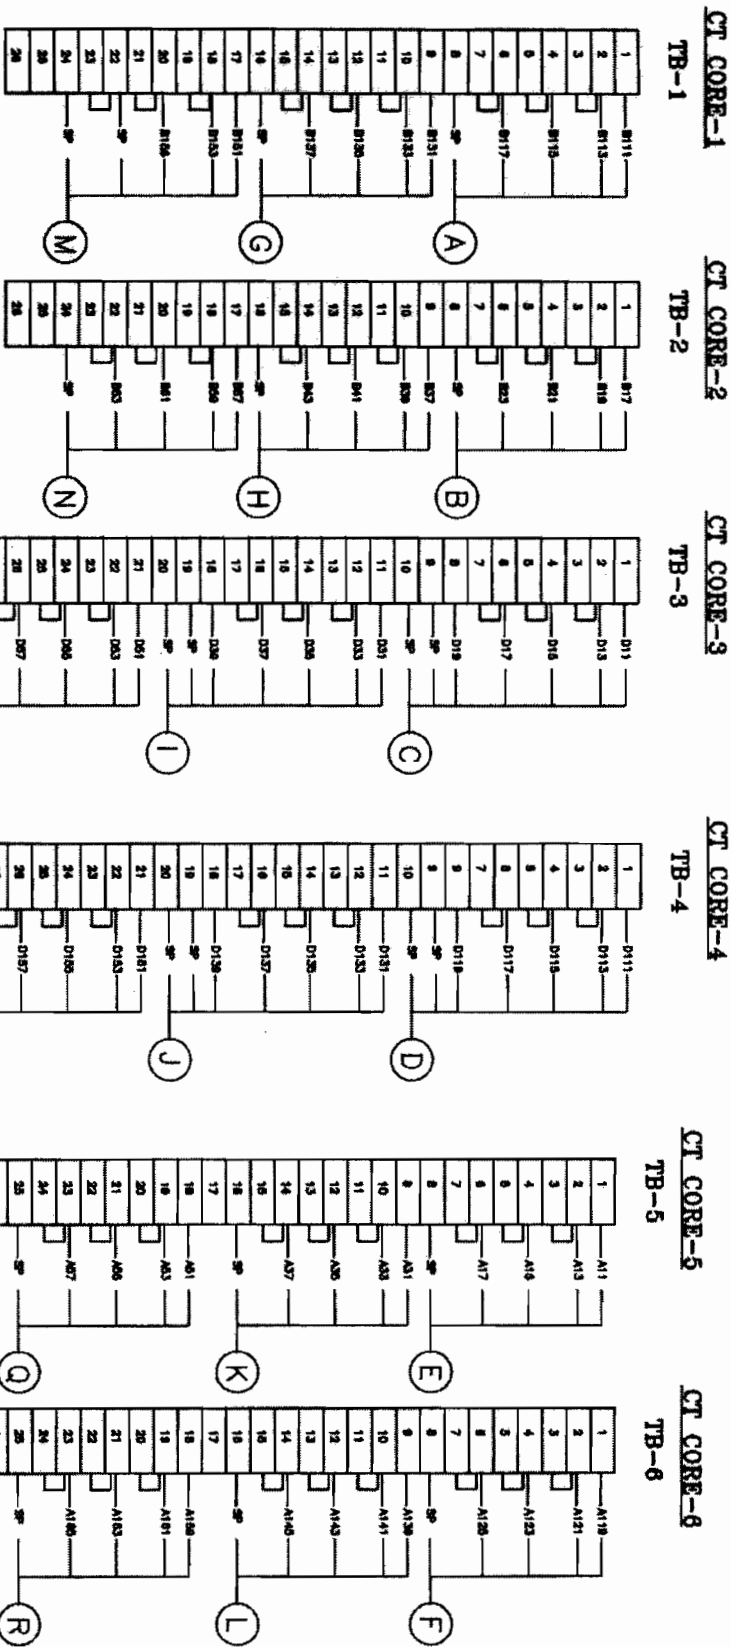

FOR TENDER PURPOSE ONLY

NOTE

1. TERMINAL BLOCKS SHALL BE DISCONNECTING STUD TYPE WITH TRANSPARENT COVER.
2. IN TB-3 & TB-4, COMPENSATING CORE (A) IF USED SHALL BE CONNECTED ACROSS
 i. 1-2, 11-12, 21-22 FOR RATIO 500/1
 ii. 1-4, 11-14, 21-24 FOR RATIO 2000/1
 iii. 1-6, 11-16, 21-26 FOR RATIO 3000/1
 iv. 4-6, 14-16, 24-26 FOR RATIO 1000/1.
3. HS-HEATER SWITCH, DS-DOOR SWITCH, SS-SOCKET SWITCH, TH-THERMOSTAT
4. THE DETAILS OF THIS DRAWING ARE SUBJECT TO CHANGE DURING DETAILED ENGINEERING.

POWER GRID CORPORATION OF INDIA LIMITED
 (A Government of India Undertaking)

PROJECT : STANDARD

TITLE: WIRING DIAGRAM OF MARSHALLING BOX FOR 766KV/400KV CT

Drawing No.: 0000-000-T-3-1-000
 PART 8 OF 9

REV. 1

SECTION –III OF TECHNICAL SPECIFICATION

SECTION-3

PROJECT DETAILS & GENERAL SPECIFICATION

SITE INFORMATION

	Particular	Details
a)	Owner	UP POWER TRANSMISSION CORPORATION Ltd
b)	Customer	POWERGRID
c)	Project Title	765kV/400kV Agra UPPTCL (New)Substation
d)	Location	AGRA
e)	Transport Facilities	RAOD/TRAIN
SITE CONDITIONS		
a)	Max. ambient air temp.	50°C
b)	Min. ambient air temp.	0°C
c)	Max. design ambient temp.	50°C
d)	Design reference temp.	50°C
e)	Average Humidity	Max. 100%
f)	Special corrosion conditions	No
g)	Solar Radiation	1.2kW/sqmtr
h)	Atmospheric UV radiation	High
i)	Altitude above sea level	Less than 1000meter
j)	Pollution Severity	High Pollution level (25mm/kV)
k)	Seismic Zone	As per the seismic zone defined in the relevant BIS but not less than 0.3g horrizontal
WIND DATA		
	Wind velocity	As per IS
	Average No. of thunderstorm days per annum	As per IS

SECTION –III OF TECHNICAL SPECIFICATION

1.0 GENERAL

This Chapter covers Technical Requirements and requirements of auxiliary items.

- a) Equipment furnished shall be complete in every respect with all mountings, fittings, fixtures and standard accessories normally provided with such equipment and/or needed for erection, completion and safe operation of the equipment as required by applicable codes unless included in the list of exclusions.
- b) Material and components not specifically stated in this specification but which are necessary for satisfactory operation of the equipment and accessories specified in this specification shall be deemed to be included unless specifically excluded and shall be supplied at no extra cost.
- c) Whenever a material or article is specified or described by the name of a particular brand, manufacturer or vendor, the specific name mentioned shall be understood as establishing type, function and quality and not as limiting competition.
- d) In case any Deviation Schedule, Bid Proposal Sheet, Schedule of Data Requirements (DRS), test reports or any other document/information are not furnished along-with the bid, the bid is liable to be rejected. Unless brought out clearly, the Bid will be deemed to conform to the specification scrupulously. All deviations from the specification shall be clearly brought out in the respective deviation schedule.

Auxiliary supplies as described below would be available at site.

Normal Voltage (Volts)	Variation in voltage	Frequency (Hz)	Phase	Neutral connection
415	+ 10 %	50 + 5 %	3 Ph- 4wire	Solidly earthed
240	+ 10 %	50 + 5 %	1 Ph-2wire	Solidly earthed
220	+ 10 %	DC		Isolated(2 wire system)
48		DC		Isolated(2 wire system) (+ Earthed)

- f) The Bidder shall clearly indicate in the bid, the specific standards in accordance with which the works will be carried out.
- g) The equipment must be new, of highest grade, the best quality of their kind, to best engineering practice and latest state of art, and in accordance with purpose for which they are intended and ensure satisfactory performance throughout the service life.

SECTION –III OF TECHNICAL SPECIFICATION

- h) All similar parts of the equipment shall be made to gauge and shall be interchangeable with and shall be made of same materials and workmanship as the corresponding parts of the equipment. Where feasible, common components, units shall be employed in different pieces of equipment in order to optimize the spare part stock-up and utilization.
- i) The requirement regarding external RIV as specified for equipment shall include the terminal fittings and the equipment shall have been tested preferably with fittings, if any.

2.0 SERVICES TO BE PERFORMED BY THE EQUIPMENT BEING FURNISHED

- a) The equipment furnished under this specification shall perform all its functions and operate satisfactorily without showing undue strain, restrike etc.
- b) The equipment shall be able to withstand forces due to wind load, short circuit, system over voltages, fluctuations, frequency variations etc., all forces considered together.

3.0 SUPPORT STRUCTURES (If in the scope of Bidder)

- a) The support structures should be hot dip galvanised with minimum 610 gram/m² net of zinc.
- b) The design calculations taking into account the environmental conditions of the substations shall be furnished for sizing of the structures.

4.0 STANDARDS

- a) The equipment to be furnished under this specification shall conform to latest issue with all amendments of standard specified under respective Chapters of this Specification. The Bidder shall note that standards mentioned in the specification are not mutually exclusive or complete in themselves, but intended to compliment each other. The bidder shall also note that list of standards presented in this specification is not complete. Whenever necessary the list of standards shall be considered in conjunction with specific IS/IEC. When the specific requirements stipulated in the specifications exceed or differ than those required by the applicable standards, the stipulation of the specification shall take precedence.
- b) Other internationally accepted standards which ensure equivalent or better performance than that specified in the standards referred shall also be accepted.
- c) In case governing standards for the equipment is different from IS or IEC, the salient points of difference shall be clearly brought out in additional information schedule alongwith English language version of standard or relevant extract of the same. The equipment conforming to standards other than IS/IEC shall be subject to POWERGRID's approval.

5.0 ENGINEERING DATA AND DRAWINGS

- 5.1 The list of drawings/documents which are to be submitted to the Purchaser shall be discussed and finalised by the Purchaser at the time of award. The supplier shall necessarily submit all the drawings/ documents unless anything is waived.
- 5.2 The Contractor shall submit 4 (four) sets of drawings/ design documents /data / detailed bill of quantity and 1 (one) set of test reports for the approval of the Purchaser. The contractor shall also submit the softcopy of the above documents in addition to hardcopy.

SECTION –III OF TECHNICAL SPECIFICATION

5.3 Drawings

- 5.3.1 All drawings submitted by the Contractor shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, dimensions, internal & the external connections, fixing arrangement required and any other information specifically requested in the specifications.
- 5.3.2 Drawings submitted by the Contractor shall be clearly marked with the name of the Purchaser, the unit designation, the specifications title, the specification number and the name of the Project. POWERGRID has standardized a large number of drawings/documents of various make including type test reports which can be used for all projects having similar requirements and in such cases no project specific approval (except for list of applicable drawings alongwith type test reports) is required. However, distribution copies of standard drawings/documents shall be submitted as per provision of the contract. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in SI units.
- 5.3.3 The review of these data by the Purchaser will cover only general conformance of the data to the specifications and documents, interfaces with the equipment provided under the specifications, external connections and of the dimensions which might affect substation layout. This review by the Purchaser may not indicate a thorough review of all dimensions, quantities and details of the equipment, materials, any devices or items indicated or the accuracy of the information submitted. This review and/or approval by the Purchaser shall not be considered by the Contractor, as limiting any of his responsibilities and liabilities for mistakes and deviations from the requirements, specified under these specifications and documents.
- 5.4 All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawings shall be at the Contractor's risk. The Contractor may make any changes in the design which are necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Purchaser. Approval of Contractor's drawing or work by the Purchaser shall not relieve the contractor of any of his responsibilities and liabilities under the Contract.
- 5.5 All engineering data submitted by the Contractor after final process including review and approval by the Purchaser shall form part of the Contract Document and the entire works performed under these specifications shall be performed in strict conformity, unless otherwise expressly requested by the Purchaser in Writing.

5.7 Approval Procedure

The scheduled dates for the submission of the drawings as well as for, any data/information to be furnished by the Purchaser would be discussed and finalised at the time of award. The following schedule shall be followed generally for approval and for providing final documentation.

- | | |
|---|---|
| i) Approval/comments/
Purchaser on initial | As per agreed by
schedule submission |
| ii) Resubmission
(whenever | Within 3 (three) weeks
from date of comments required) |
| iii) Approval or comments | Within 3 (three) weeks of receipt of
resubmission. |

SECTION –III OF TECHNICAL SPECIFICATION

- | | | |
|-------|---|---|
| iv) | Furnishing of distribution copies (5 hard copies per substation and one scanned copy (pdf format) for Corporate Centre) | 2 weeks from the date of approval |
| v) | Furnishing of distribution copies of test reports | |
| (a) | Type test reports (one scanned softcopy in pdf format per substation plus one for corporate centre & one hardcopy per substation) | 2 weeks from the date of final approval |
| (b) | Routine Test Reports (one copy for each substation) | -do- |
| vi) | Furnishing of instruction/ copies per substation and one softcopy (pdf format) for corporate centre & per substation) | As per agreed schedule operation manuals (2 |
| (vii) | As built drawings (two sets of per substation & one softcopy (pdf format) for corporate centre & per substation) | On completion of entire works hardcopy |

NOTE :

- (1) The supplier may please note that all resubmissions must incorporate all comments given in the earlier submission by BHEL/POWERGRID or adequate justification for not incorporating the same must be submitted failing which the submission of documents is likely to be returned.
- (2) All drawings should be submitted in softcopy form, however substation design drawings like SLD, GA, all layouts etc. shall also be submitted in AutoCAD Version. SLD, GA & layout drawings shall be submitted for the entire substation in case of substation extension also.
- (3) The instruction Manuals shall contain full details of drawings of all equipment being supplied under this contract, their exploded diagrams with complete instructions for storage, handling, erection, commissioning, testing, operation, trouble shooting, servicing and overhauling procedures.
- (4) If after the commissioning and initial operation of the substation, the instruction manuals require any modifications/ additions/changes, the same shall be incorporated and the updated final instruction manuals shall be submitted by the supplier to BHEL/POWERGRID.
- (5) The manufacturer shall furnish to the Purchaser catalogues of spare parts.
- (6) All As-built drawings/documents shall be certified by site indicating the changes before final submission.

6.0 MATERIAL WORKMANSHIP

6.1 General Requirement

- 6.1.1 Where the specification does not contain references to workmanship, equipment, materials and components of the covered equipment, it is essential that the same must be new, of highest grade of the best quality of their kind, conforming to best engineering

SECTION –III OF TECHNICAL SPECIFICATION

practice and suitable for the purpose for which they are intended.

- 6.1.2 In case where the equipment, materials or components are indicated in the specification as “similar” to any special standard, the Purchaser shall decide upon the question of similarity. When required by the specification or when required by the Purchaser the Contractor shall submit, for approval, all the information concerning the materials or components to be used in manufacture. Machinery, equipment, materials and components supplied, installed or used without such approval shall run the risk of subsequent rejection, it being understood that the cost as well as the time delay associated with the rejection shall be borne by the supplier.
- 6.1.3 The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfill their required function. In general, screw threads shall be standard metric threads. The use of other thread forms will only be permitted when prior approval has been obtained from the BHEL/POWERGRID.
- 6.1.4 Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall also be interchangeable and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.
- 6.1.5 All materials and equipment shall be installed in strict accordance with the manufacturer’s recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be considered as being the erection of equipment at its permanent location. This, unless otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, levelling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer’s tolerances, instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacturer’s limits suitable guards shall be provided for the protection of personnel on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance purposes. The spare equipment(s) shall be installed at designated locations and tested for healthiness.
- 6.1.6 The supplier shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The supplier shall apply all operational lubricants to the equipment installed by him.
- 6.1.7 All oil, grease and other consumables used in the Works/ Equipment shall be purchased in India unless the Contractor has any special requirement for the specific application of a type of oil or grease not available in India. In such is the case he shall declare in the proposal, where such oil or grease is available. He shall help POWERGRID in establishing equivalent Indian make and Indian Contractor. The same

SECTION –III OF TECHNICAL SPECIFICATION

shall be applicable to other consumables too.

- 6.1.8 Corona and radio interference voltage test and seismic withstand test (for 132kV and above voltage level) procedures for equipments shall be in line with the procedure given at Annexure-A and B respectively.

6.2 Provisions For Exposure to Hot and Humid climate

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favourable to the growth of fungi and mildew. The indoor equipments located in non-air conditioned areas shall also be of same type.

6.2.1 Space Heaters

- 6.2.1.1 The heaters shall be suitable for continuous operation at 240V as supply voltage. On-off switch and fuse shall be provided.
- 6.2.1.2 One or more adequately rated thermostatically connected heaters shall be supplied to prevent condensation in any compartment. The heaters shall be installed in the compartment and electrical connections shall be made sufficiently away from below the heaters to minimize deterioration of supply wire insulation. The heaters shall be suitable to maintain the compartment temperature to prevent condensation.
- 6.2.1.3 Suitable anti condensation heaters with the provision of thermostat shall be provided.

6.2.2 FUNGI STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on parts which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interfere with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application of the varnish.

6.2.3 Ventilation opening

Wherever ventilation is provided, the compartments shall have ventilation openings with fine wire mesh of brass to prevent the entry of insects and to reduce to a minimum the entry of dirt and dust. Outdoor compartment openings shall be provided with shutter type blinds and suitable provision shall be made so as to avoid any communication of air / dust with any part in the enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc.

6.2.4 Degree of Protection

The enclosures of the Control Cabinets, Junction boxes and Marshalling Boxes, panels etc. to be installed shall provide degree of protection as detailed here under:

- a) Installed out door: IP- 55
- b) Installed indoor in air conditioned area: IP-31
- c) Installed in covered area: IP-52
- d) Installed indoor in non air conditioned area where possibility of entry of water is limited: IP-41.
- e) For LT Switchgear (AC & DC distribution Boards) : IP-52

The degree of protection shall be in accordance with IS:13947 (Part-I) / IEC-60947(Part-I) / IS 12063 / IEC-60529. Type test report for degree of protection test, shall be submitted for approval.

SECTION –III OF TECHNICAL SPECIFICATION

6.3 RATING PLATES, NAME PLATES AND LABELS

Each main and auxiliary item of substation is to have permanently attached to it in a conspicuous position a rating plate of non-corrosive material upon which is to be engraved manufacturer's name, year of manufacture, equipment name, type or serial number together with details of the loading conditions under which the item of substation in question has been designed to operate, and such diagram plates as may be required by the Purchaser. The rating plate of each equipment shall be according to IEC requirement.

All such nameplates, instruction plates, rating plates of transformers, reactors, CB, CT, CVT, SA, Isolators, C & R panels and PLCC equipments shall be bilingual with Hindi inscription first followed by English. Alternatively two separate plates one with Hindi and the other with English inscriptions may be provided.

6.4 FIRST FILL OF CONSUMABLES, OIL AND LUBRICANTS

All the first fill of consumables such as oils, lubricants, filling compounds, touch up paints, soldering/brazing material for all copper piping of circuit breakers and essential chemicals etc. which will be required to put the equipment covered under the scope of the specifications, into successful Operation, shall be furnished by the supplier unless specifically excluded under the exclusions in these specifications and documents.

7.0 DESIGN IMPROVEMENTS / COORDINATION

- 7.1 The bidder shall note that the equipment offered by him in the bid only shall be accepted for supply. However, the Purchaser or the Contractor may propose changes in the specification of the equipment or quality thereof and if the Purchaser & contractor agree upon any such changes, the specification shall be modified accordingly.
- 7.2 If any such agreed upon change is such that it affects the price and schedule of completion, the parties shall agree in writing as to the extent of any change in the price and/or schedule of completion before the Contractor proceeds with the change. Following such agreement, the provision thereof, shall be deemed to have been amended accordingly.
- 7.3 The supplier shall be responsible for the selection and design of appropriate equipments to provide the best co-ordinated performance of the entire system. The basic design requirements are detailed out in this Specification. The design of various components, sub-assemblies and assemblies shall be so done that it facilitates easy field assembly and maintenance.
- 7.4 The supplier has to coordinate designs and terminations with the agencies (if any) who are Consultants/Contractor for the Purchaser. The names of agencies shall be intimated to the successful bidders.
- 7.5 The supplier will be called upon to attend design co-ordination meetings with the Engineer, other Contractor's and the Consultants of the Purchaser (if any) during the period of Contract. The Contractor shall attend such meetings at his own cost at POWERGRID Corporate Centre, Gurgaon (Haryana) or at mutually agreed venue as and when required and fully cooperate with such persons and agencies involved during those discussions.

8.0 QUALITY ASSURANCE PROGRAMME

- 8.1 To ensure that the equipment and services under the scope of this Contract whether manufactured or performed within the supplier's Works or at his Sub-contractor's premises or at the Purchaser's site or at any other place of Work are in

SECTION –III OF TECHNICAL SPECIFICATION

accordance with the specifications, the supplier shall adopt suitable quality assurance programme to control such activities at all points necessary. The detailed programme shall be submitted by the contractor after the award for reference. A quality assurance programme of the supplier shall generally cover the following:

- (a) His organisation structure for the management and implementation of the proposed quality assurance programme;
- (b) Documentation control system;
- (c) Qualification data for bidder's key personnel;
- (d) The procedure for purchases of materials, parts components and selection of sub-Contractor's services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases etc.
- (e) System for shop manufacturing and site erection controls including process controls and fabrication and assembly control;
- (f) Control of non-conforming items and system for corrective actions;
- (g) Inspection and test procedure both for manufacture and field activities.
- (h) Control of calibration and testing of measuring instruments and field activities;
- (i) System for indication and appraisal of inspection status;
- (j) System for quality audits;
- (k) System for authorising release of manufactured product to the Purchaser.
- (l) System for maintenance of records;
- (m) System for handling storage and delivery; and
- (n) A quality plan detailing out the specific quality control measures and procedures adopted for controlling the quality characteristics relevant to each item of equipment furnished and/or services rendered.

POWERGRID/BHEL or his duly authorised representative reserves the right to carry out quality audit and quality surveillance of the system and procedure of the supplier/his vendor's quality management and control activities.

8.2 Quality Assurance Documents

The supplier would be required to submit all the Quality Assurance Documents as stipulated in the Quality Plan at the time of POWERGRID/BHEL inspection of equipment/material

9.0 TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICATE

- 9.1 All equipment being supplied shall conform to type tests as per technical specification and shall be subject to routine tests in accordance with requirements stipulated under respective sections.
- 9.2 The reports for all type tests as per technical specification shall be furnished by the supplier alongwith equipment / material drawings. However, type test reports of similar equipments/ material already accepted in POWERGRID shall be applicable for all project with similar requirement. The type tests conducted earlier should have either been conducted in accredited laboratory (accredited based on ISO / IEC Guide 25

SECTION –III OF TECHNICAL SPECIFICATION

/ 17025 or EN 45001 by the national accreditation body of the country where laboratory is located) or witnessed by POWERGRID or representative authorized by POWERGRID or Utility or representative of accredited test lab or reputed consultant.

The test reports submitted shall be of the tests conducted within last 10 (ten) years prior to the date of bid opening i.e. 26.08.11. In case the test reports are of the test conducted earlier than 10 (ten) years prior to the date of bid opening, the contractor shall repeat these test(s) at no extra cost to BHEL.

However, in case of instrument transformers, the following type tests should have been conducted within 5 (five) years prior to the date of bid opening.

- i) Lightning Impulse Test
- ii) Switching Impulse Test
- iii) Multiple Chopped Impulse Test (For CT)
- iv) Chopped Impulse Test (For CVT)

In case the test reports are of these tests (for instrument transformers) as mentioned above are conducted earlier than 5 (five) years prior to the date of bid opening i.e. 26.08.11, the contractor shall repeat these test(s) at no extra cost to the purchaser.

Further, in the event of any discrepancy in the test reports i.e. any test report not acceptable due to any design/manufacturing changes (including substitution of components) or due to non-compliance with the requirement stipulated in the Technical Specification or any/all type tests not carried out, same shall be carried out without any additional cost implication to the Purchaser.

The supplier shall intimate the BHEL/POWERGRID the detailed program about the tests atleast two (2) weeks in advance in case of domestic supplies & six (6) weeks in advance in case of foreign supplies.

Further, in case type tests are required to be conducted/repeated and the deputation of Inspector/Purchaser's representative is required, then all the expenses shall be borne by the supplier.

9.3 The Purchaser intends to repeat the type tests on Power Transformer and Shunt Reactor except Dynamic short circuit tests on transformers, for which test charges shall be payable as per provision of contract. The price of conducting type tests shall be included in Bid price and break up of these shall be given in the relevant schedule of Bid Proposal Sheets. These Type test charges would be considered in bid evaluation. In case Bidder does not indicate charges for any of the type tests or does not mention the name of any test in the price schedules, it will be presumed that the particular test has been offered free of charge. Further, in case any Bidder indicates that he shall not carry out a particular test, his offer shall be considered incomplete and shall be liable to be rejected. BHEL/POWERGRID reserves the right to witness any or all the type tests. The BHEL/POWERGRID also reserves the right to waive the repeating of type tests partly or fully and in case of waiver, test charges for the same shall not be payable.

The Purchaser shall bear all expenses for deputation of purchaser's representative(s) for witnessing the type tests under this clause except in the case of re-deputation if any, necessitated due to no fault of the purchaser.

For outdoor receptacles, trefoil clamps, diesel engine, alternator, motors, cable

SECTION –III OF TECHNICAL SPECIFICATION

glands, lighting fixtures, ACSR/AAC conductor, IPS aluminum tube and junction boxes, type test reports are not required to be submitted for the makes indicated at Annexure-E /POWERGRID approved list of subvendors. For the new makes(other than those indicated at Annexure-E / POWERGRID approved list of subvendors), type test reports as per relevant standard shall be submitted for POWERGRID's approval.

- 9.4 The Purchaser, his duly authorised representative and/or outside inspection agency acting on behalf of the Purchaser shall have at all reasonable times free access to the Contractor's/sub-vendors premises or Works and shall have the power at all reasonable times to inspect and examine the materials and workmanship of the Works during its manufacture or erection if part of the Works is being manufactured or assembled at other premises or works, the Contractor shall obtain for the Engineer and for his duly authorised representative permission to inspect as if the works were manufactured or assembled on the Contractor's own premises or works. Inspection may be made at any stage of manufacture, despatch or at site at the option of the Purchaser and the equipment if found unsatisfactory due to bad workmanship or quality, material is liable to be rejected.
- 9.5 The supplier shall give the Purchaser /Inspector fifteen (15) days written notice for on-shore and six (6) weeks notice for off-shore material being ready for joint testing including contractor and POWERGRID. Such tests shall be to the Contractor's account except for the expenses of the Inspector. The Purchaser/inspector, unless witnessing of the tests is virtually waived, will attend such tests within fifteen (15) days of the date of which the equipment is notified as being ready for test/inspection, failing which the Contractor may proceed alone with the test which shall be deemed to have been made in the Inspector's presence and he shall forthwith forward to the Inspector duly certified copies of tests in triplicate.
- 9.6 The Purchaser or Inspector shall, within fifteen (15) days from the date of inspection as defined herein give notice in writing to the Contractor, of any objection to any drawings and all or any equipment and workmanship which in his opinion is not in accordance with the Contract. The Contractor shall give due consideration to such objections and shall either make the modifications that may be necessary to meet the said objections or shall confirm in writing to the Purchaser /Inspector giving reasons therein, that no modifications are necessary to comply with the Contract.
- 9.7 When the factory tests have been completed at the Contractor's or Sub-Contractor's works, the Purchaser/inspector shall issue a certificate to this effect within fifteen (15) days after completion of tests but if the tests are not witnessed by the Purchaser /Inspector, the certificate shall be issued within fifteen (15) days of receipt of the Contractor's Test certificate by the Engineer/Inspector. Failure of the Purchaser /Inspector to issue such a certificate shall not prevent the Contractor from proceeding with the Works. The completion of these tests or the issue of the certificate shall not bind the Purchaser to accept the equipment should, it, on further tests after erection, be found not to comply with the Contract. The equipment shall be dispatched to site only after approval of test reports and issuance of CIP by the Purchaser.
- 9.8 In all cases where the Contract provides for tests whether at the premises or at the works of the Contractor or of any Sub-Contractor, the Contractor except where otherwise specified shall provide free of charge such items as labour, materials, electricity, fuel, water, stores, apparatus and instruments as may be reasonably demanded by the Purchaser /Inspector or his authorised representative to carry out effectively such tests of

SECTION –III OF TECHNICAL SPECIFICATION

the equipment in accordance with the Contract and shall give facilities to the Purchaser /Inspector or to his authorised representative to accomplish testing.

9.9 The inspection by Purchaser and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Contractor in respect of the agreed quality assurance programme forming a part of the Contract.

9.10 The Purchaser will have the right of having at his own expenses any other test(s) of reasonable nature carried out at Contractor's premises or at site or in any other place in addition of aforesaid type and routine tests, to satisfy that the material comply with the specification.

9.11 The Purchaser reserves the right for getting any field tests not specified in respective sections of the technical specification conducted on the completely assembled equipment at site. The testing equipments for these tests shall be provided by the Purchaser.

10.0 TESTS

10.1 Pre-commissioning Tests

On completion of erection of the equipment and before charging, each item of the equipment shall be thoroughly cleaned and then inspected jointly by the Purchaser and the Contractor for correctness and completeness of installation and acceptability for charging, leading to initial pre-commissioning tests at Site. The list of pre-commissioning tests to be performed are given in respective chapters and shall be included in the Contractor's quality assurance programme.

10.2 Commissioning Tests

10.2.1 The available instrumentation and control equipment will to be used during such tests and the Purchaser will calibrate, all such measuring equipment and devices as far as practicable.

10.2.2 Any special equipment, tools and tackles required for the successful completion of the Commissioning Tests shall be provided by the Contractor, free of cost.

10.2.3 The specific tests requirement on equipment have been brought out in the respective chapters of the technical specification.

10.3 The Contractor shall be responsible for obtaining statutory clearances from the concerned authorities for commissioning the equipment and the switchyard. However necessary fee shall be reimbursed by POWERGRID on production of requisite documents.

11.0 PACKAGING & PROTECTION

11.1 All the equipments shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. On request of the Purchaser, the Contractor shall also submit packing details/associated drawing for any equipment/material under his scope of supply, to facilitate the Purchaser to repack any equipment/material at a later date, in case the need arises. While packing all the materials, the limitation from the point of view of availability of Railway wagon sizes in India should be taken into account. The Contractor shall be responsible for any loss or damage during transportation, handling and storage due to improper packing. Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor. Purchaser takes no responsibility of the availability of the wagons.

SECTION –III OF TECHNICAL SPECIFICATION

11.2 All coated surfaces shall be protected against abrasion, impact, discolouration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves and pipings and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

12.0 FINISHING OF METAL SURFACES

12.1 All metal surfaces shall be subjected to treatment for anti-corrosion protection. All ferrous surfaces for external use unless otherwise stated elsewhere in the specification or specifically agreed, shall be hot-dip galvanized after fabrication. High tensile steel nuts & bolts and spring washers shall be electro galvanized to service condition 4. All steel conductors including those used for earthing/grounding (above ground level) shall also be galvanized according to IS:2629.

12.2 HOT DIP GALVANISING

12.2.1 The minimum weight of the zinc coating shall be 610 gm/sq.m and minimum average thickness of coating shall be 86 microns for all items having thickness 6mm and above. For items lower than 6mm thickness requirement of coating thickness shall be as per relevant ASTM. For surface which shall be embedded in concrete, the zinc coating shall be 610 gm/sq. m minimum.

12.2.2 The galvanized surfaces shall consist of a continuous and uniform thick coating of zinc, firmly adhering to the surface of steel. The finished surface shall be clean and smooth and shall be free from defects like discoloured patches, bare spots, unevenness of coating, spelter which is loosely attached to the steel globules, spiky deposits, blistered surface, flaking or peeling off, etc. The presence of any of these defects noticed on visual or microscopic inspection shall render the material liable to rejection.

12.2.3 After galvanizing, no drilling or welding shall be performed on the galvanized parts of the equipment excepting that nuts may be threaded after galvanizing. Sodium dichromate treatment shall be provided to avoid formation of white rust after hot dip galvanization.

12.2.4 The galvanized steel shall be subjected to six one minute dips in copper sulphate solution as per IS-2633.

12.2.5 Sharp edges with radii less than 2.5 mm shall be able to withstand four immersions of the Standard Preece test. All other coatings shall withstand six immersions. The following galvanizing tests should essentially be performed as per relevant Indian Standards.

- Coating thickness
- Uniformity of zinc
- Adhesion test
- Mass of zinc coating

12.2.6 Galvanised material must be transported properly to ensure that galvanised surfaces are not damaged during transit. Application of zinc rich paint at site shall not be allowed.

12.3 PAINTING

12.3.1 All sheet steel work shall be degreased, pickled, phosphated in accordance with the IS-6005 "Code of practice for phosphating iron and sheet". All surfaces, which will not be easily accessible after shop assembly, shall beforehand be treated and protected for the

SECTION –III OF TECHNICAL SPECIFICATION

life of the equipment. The surfaces, which are to be finished painted after installation or require corrosion protection until installation, shall be shop painted with at least two coats of primer. Oil, grease, dirt and swaf shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water, rinsing with slightly alkaline hot water and drying.

12.3.2 After phosphating, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of two coats of ready mixed, stoving type zinc chromate primer. The first coat may be “flash dried” while the second coat shall be stoved.

12.3.3 After application of the primer, two coats of finishing synthetic enamel paint shall be applied, each coat followed by stoving. The second finishing coat shall be applied after inspection of first coat of painting.

12.3.4 The exterior and interior colour of the paint in case of new substations shall preferably be RAL 7032 for all equipment, marshalling boxes, junction boxes, control cabinets, panels etc. unless specifically mentioned under respective sections of the equipments. Glossy white colour inside the equipments /boards/panels/junction boxes is also acceptable. The exterior colour for panels shall bematching with the existing panels in case of extension of a substation. Each coatof primer and finishing paint shall be of slightly different shade to enable inspection of the painting. A small quantity of finishing paint shall be supplied for minor touching up required at site after installation of the equipments.

12.3.5 In case the Bidder proposes to follow his own standard surface finish and protection procedures or any other established painting procedures, like electrostatic painting etc., the procedure shall be submitted alongwith the Bids for Purchaser’s review & approval.

12.3.6 The colour scheme as given below shall be followed for Fire Protection and Air Conditioning systems

S.No.	PIPE LINE	Base colour	Band colour
Fire Protection System			
1	Hydrant and Emulsifier system pipeline	FIRE RED	-
2	Emulsifier system detection line – water	FIRE RED	Sea Green
3	Emulsifier system detection line – Air	FIRE RED	Sky Blue
4	Pylon support pipes	FIRE RED	
Air Conditioning System			
5	Refrigerant gas pipeline – at compressor suction	Canary Yellow	-
6	Refrigerant gas pipeline – at compressor discharge	Canary Yellow	Red
7	Refrigerant liquid pipeline	Dark Admiralty Green	-
8	Chilled water pipeline	Sea Green	-
9	Condenser water pipeline	Sea Green	Dark Blue

SECTION –III OF TECHNICAL SPECIFICATION

12.3.7 For aluminium casted surfaces, the surface shall be with smooth finish. Further, in case of aluminium enclosures the surface shall be coated with powder (coating thickness of 60 microns) after surface preparation for painting.

13.0 HANDLING, STORING AND INSTALLATION

13.1 In accordance with the specific installation instructions as shown on manufacturer's drawings or as directed by the Purchaser or his representative, the Contractor shall unload, store, erect, install, wire, test and place into commercial use all the equipment included in the contract. Equipment shall be installed in a neat, workmanlike manner so that it is level, plumb, square and properly aligned and oriented. Commercial use of switchyard equipment means completion of all site tests specified and energisation at rated voltage.

13.2 Contractor may engage manufacturer's Engineers to supervise the unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. Contractor shall unload, transport, store, erect, test and commission the equipment as per instructions of the manufacturer's supervisory Engineer(s) and shall extend full cooperation to them.

13.3 The contractor shall have to ensure that the hard and flat indoor and outdoor storage areas are in place prior to commencement of delivery of material at site. Contractor shall also ensure availability of proper unloading and material handling equipment like cranes etc. and polyester/nylon ropes of suitable capacity to avoid damage during unloading and handling of material at site. All indoor equipments shall be stored indoors. Outdoor equipment may be stored outdoors but on a hard and flat raised area properly covered with waterproof and dustproof covers to protect them from water seepage and moisture ingress. However, all associated control panels, marshalling boxes operating boxes etc. of outdoor equipments are to be stored indoors only. Storage of equipment on top of another one is not permitted if the wooden packing is used. Material opened for joint inspection shall be repacked properly as per manufacturer's recommendations. During storage of material regular periodic monitoring of important parameters like oil level / leakage, SF6 / Nitrogen pressure etc. shall be ensured by the contractor.

13.4 In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the Purchaser. Contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.

13.5 Where assemblies are supplied in more than one section, Contractor shall make all necessary mechanical and electrical connections between sections including the connection between buses. Contractor shall also do necessary adjustments/alignments necessary for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning. Any equipment damaged due to negligence or carelessness or otherwise shall be replaced by the Contractor at his own expense.

13.6 Supplier shall be responsible for examining all the shipment and notify the Purchaser immediately of any damage, shortage, discrepancy etc. for the purpose of Purchaser's information only. The Contractor shall submit to the Purchaser every

SECTION –III OF TECHNICAL SPECIFICATION

week a report detailing all the receipts during the weeks. However, the Contractor shall be solely responsible for any shortages or damages in transit, handling and/or in storage and erection of the equipment at Site Any demurrage, wharfage and other such charges claimed by the transporters, railways etc. shall be to the account of the Contractor.

- 13.7 The supplier shall be fully responsible for the equipment/material until the same is handed over to the Purchaser in an operating condition after commissioning. Contractor shall be responsible for the maintenance of the equipment/material while in storage as well as after erection until taken over by Purchaser, as well as protection of the same against theft, element of nature, corrosion, damages etc.
- 13.8 Where material / equipment is unloaded by Purchaser before the Contractor arrives at site or even when he is at site, Purchaser by right can hand over the same to Contractor and there upon it will be the responsibility of Contractor to store the material in an orderly and proper manner.
- 13.9 The Contractor shall be responsible for making suitable indoor storage facilities, to store all equipment which requires indoor storage.
- 13.10 The words ‘erection’ and ‘installation’ used in the specification are synonymous.
- 13.11 Exposed live parts shall be placed high enough above ground to meet the requirements of electrical and other statutory safety codes.

13.12 Equipment Bases

A cast iron or welded steel base plate shall be provided for all rotating equipment which is to be installed on a concrete base unless otherwise agreed to by the Purchaser. Each base plate shall support the unit and its drive assembly, shall be of a neat design with pads for anchoring the units, shall have a raised lip all around, and shall have threaded drain connections.

14.0 TOOLS AND TACKLES

The Contractor shall supply with the equipment one complete set of all special tools and tackles for the erection, assembly, dis-assembly and maintenance of the equipment. However, these tools and tackles shall be separately, packed and brought on to Site.

15.0 AUXILIARY SUPPLY

- 15.1 The sub-station auxiliary supply is normally met through a system indicated under section “Electrical & Mechanical Auxiliaries” having the following parameters. The auxiliary power for station supply, including the equipment drive, cooling system of any equipment, air-conditioning, lighting etc shall be designed for the specified Parameters as under. The DC supply for the instrumentation and PLCC system shall also conform the parameters as indicated in the following.

Normal Voltage	Variation in Voltage	Frequency in HZ	Phase/Wire	Neutral connection
415V	± 10%	50 ± 5%	3/4 Wire	Solidly Earthed.
240V	± 10%	50 ± 5%	1/2 Wire	Solidly Earthed.
220V	190V to 240V	DC	-	Isolated 2 wire System

SECTION –III OF TECHNICAL SPECIFICATION

48V	–	DC	–	2 wire system (+) earthed
-----	---	----	---	------------------------------

Combined variation of voltage and frequency shall be limited to $\pm 10\%$.

16.0 SUPPORT STRUCTURE (If in the scope of supplier)

16.1 The equipment support structures shall be suitable for equipment connections at the first level i.e 14.0 meter, 8.0 meter and 5.9 meter from plinth level for 765 kV, 420 kV and 245 kV substations respectively. All equipment support structures shall be supplied alongwith brackets, angles, stools etc. for attaching the operating mechanism, control cabinets & marshalling box (wherever applicable) etc.

16.2 Support structure shall meet the following mandatory requirements:

16.2.1 The minimum vertical distance from the bottom of the lowest porcelain part of the bushing, porcelain enclosures or supporting insulators to the bottom of the equipment base, where it rests on the foundation pad shall be 2.55 metres.

17.0 CLAMPS AND CONNECTORS INCLUDING TERMINAL CONNECTORS

17.1 All power clamps and connectors shall conform to IS:5561 & NEMA CC1 and shall be made of materials listed below :

- | | | |
|-------|--|--|
| a) | For connecting
ACSR conductors | Aluminum alloy casting,
conforming to designation A6
of IS:617 and all test shall
conform to IS:617 |
| b) | For connecting
equipment ter-
minals made of
copper with
ACSR conductors | Bimetallic connectors made
from aluminum alloy casting,
conforming to designation A6
of IS:617 with 2mm thick
bimetallic liner and all test
shall conform to IS:617 |
| c) | For connecting G.I | Galvanised mild steel shield wire |
| d) i) | Bolts, nuts &
Plain, washers | i) Electro-galvanised for sizes
below M12, for others hot dip
galvanised. |
| | ii) Spring washers
items
'a' to 'c' | ii) Electro-galvanised mild for
steel suitable for atleast
service condition-3 as per
IS:1573 |

17.2 Necessary clamps and connectors shall be supplied for all equipment and connections. The requirement regarding external corona and RIV as specified for any equipment shall include its terminal fittings. If corona rings are required to meet these requirements they shall be considered as part of that equipment and included in the scope of work.

17.3 Where copper to aluminum connections are required, bi-metallic clamps shall be used, which shall be properly designed to ensure that any deterioration of the connection is kept to a minimum and restricted to parts which are not current carrying or subjected to stress.

17.4 Low voltage connectors, grounding connectors and accessories for grounding allequipment as specified in each particular case, are also included in the scope of Work.

17.5 No current carrying part of any clamp shall be less than 10 mm thick. All ferrous

SECTION –III OF TECHNICAL SPECIFICATION

parts shall be hot dip galvanised. Copper alloy liner of minimum 2 mm thickness shall be cast integral with aluminum body or 2 mm thick bi-metallic strips shall be provided for Bi-metallic clamps.

- 17.6 All casting shall be free from blow holes, surface blisters, cracks and cavities. All sharp edges and corners shall be blurred and rounded off.
- 17.7 Flexible connectors, braids or laminated straps made for the terminal clamps for bus posts shall be suitable for both expansion or through (fixed/sliding) type connection of 4" IPS AL. tube as required. In both the cases the clamp height (top of the mounting pad to centre line of the tube) should be same.
- 17.8 Clamp shall be designed to carry the same current as the conductor and the temperature rise shall be equal or less than that of the conductor at the specified ambient temperature. The rated current for which the clamp/connector is designed with respect to the specified reference ambient temperature, shall also be indelibly marked on each component of the clamp/connector, except on the hardware.
- 17.9 All current carrying parts shall be designed and manufactured to have minimum contact resistance.
- 17.10 Clamps and connectors shall be designed to be corona controlled.
- 17.11 Tests**
- 17.11.1 Clamps and connectors should be type tested as per IS:5561 and shall also be subjected to routine tests as per IS:5561. Following type test reports shall be submitted for approval as per clause 9.2 above except for sl. no.(ii) & (iii) for which type test once conducted shall be applicable (i.e. the requirement of test conducted within last ten years shall not be applicable).
- i) Temperature rise test (maximum temperature rise allowed is 35°C over 50°C ambient)
 - ii) Short time current test
 - iii) Corona (dry) and RIV (dry) test (for 220 KV and above voltage level clamps)
 - iv) Resistance test and tensile test

18.0 CONTROL CABINETS, JUNCTION BOXES, TERMINAL BOXES & MARSHALLING BOXES FOR OUTDOOR EQUIPMENT

- 18.1 All types of boxes, cabinets etc. shall generally conform to & be tested in accordance with IS-5039/IS-8623, IEC-60439, as applicable, and the clauses given below:
- 18.2 Control cabinets, junction boxes, Marshalling boxes & terminal boxes shall be made of sheet steel or aluminum enclosure and shall be dust, water and vermin proof. Sheet steel used shall be atleast 2.0 mm thick cold rolled or 2.5 mm hot rolled or alternately 1.6 mm thick stainless steel can also be used. The box shall be properly braced to prevent wobbling. There shall be sufficient reinforcement to provide level surfaces, resistance to vibrations and rigidity during transportation and installation. In case of aluminum enclosed box the thickness of aluminum shall be such that it provides adequate rigidity and long life as comparable with sheet steel of specified thickness.
- 18.3 A canopy and sealing arrangements for operating rods shall be provided in marshalling boxes / Control cabinets to prevent ingress of rain water.
- 18.4 Cabinet/boxes shall be provided with double hinged doors with padlocking

SECTION –III OF TECHNICAL SPECIFICATION

arrangements. The distance between two hinges shall be adequate to ensure uniform sealing pressure against atmosphere. The quality of the gasket shall be such that it does not get damaged/cracked during the operation of the equipment.

18.5 All doors, removable covers and plates shall be gasketed all around with suitably profiled EPDM/Neoprene gaskets. The gasket shall be tested in accordance with approved quality plan, IS:11149 and IS:3400. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.

18.6 All boxes/cabinets shall be designed for the entry of cables from bottom by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet.

Suitable cable gland plate above the base of the marshalling kiosk/box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland plate. Gland plate shall have provision for some future glands to be provided later, if required. The Nickel plated glands shall be dust proof, screw on & double compression type and made of brass. The gland shall have provision for securing armour of the cable separately and shall be provided with earthing tag. The glands shall conform to BS:6121.

18.7 A 240V, single phase, 50 Hz, 15 amp AC plug and socket shall be provided in the cabinet with ON-OFF switch for connection of hand lamps. Plug and socket shall be of industrial grade.

18.8 For illumination, a fluorescent tube or CFL of approximately 9 to 15 watts shall be provided. The switching of the fittings shall be controlled by the door switch. .

For junction boxes of smaller sizes such as lighting junction box, manual operated earth switch mechanism box etc., plug socket, heater and illumination is not required to be provided.

18.9 All control switches shall be of MCB/rotary switch type and Toggle/piano switches shall not be accepted.

18.10 Positive earthing of the cabinet shall be ensured by providing two separate earthing pads. The earth wire shall be terminated on to the earthing pad and secured by the use of self etching washer. Earthing of hinged door shall be done by using a separate earth wire.

18.11 The bay marshalling kiosks shall be provided with danger plate and a diagram showing the numbering/connection/feruling by pasting the same on the inside of the door.

18.12 a) The following routine tests alongwith the routine tests as per IS:5039 shall also be conducted:

- i) Check for wiring
- ii) Visual and dimension check

b) The enclosure of bay marshalling kiosk, junction box, terminal box shall conform to IP-55 as per IS:13947 including application of, 2.5 KV rms for 1 (one) minute, insulation resistance and functional test after IP-55 test.

19.0 Deleted.

20.0 TERMINAL BLOCKS AND WIRING

20.1 Control and instrument leads from the switchboards or from other equipment will be brought to terminal boxes or control cabinets in conduits. All interphase and external connections to equipment or to control cubicles will be made through terminal blocks.

SECTION –III OF TECHNICAL SPECIFICATION

- 20.2 Terminal blocks shall be 650V grade and have continuous rating to carry the maximum expected current on the terminals and non breakable type. These shall be of moulded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts. Screw clamp, overall insulated, insertion type, rail mounted terminals can be used in place of stud type terminals. But preferably the terminal blocks shall be non-disconnecting stud type of Elmex or Phoenix or Wago or equivalent make.
- 20.3 Terminal blocks for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.
- 20.4 The terminal shall be such that maximum contact area is achieved when a cable is terminated. The terminal shall have a locking characteristic to prevent cable from escaping from the terminal clamp unless it is done intentionally.
- 20.5 The conducting part in contact with cable shall preferably be tinned or silver plated however Nickel plated copper or zinc plated steel shall also be acceptable.
- 20.6 The terminal blocks shall be of extensible design.
- 20.7 The terminal blocks shall have locking arrangement to prevent its escape from the mounting rails.
- 20.8 The terminal blocks shall be fully enclosed with removable covers of transparent, non-deteriorating type plastic material. Insulating barriers shall be provided between the terminal blocks. These barriers shall not hinder the operator from carrying out the wiring without removing the barriers.
- 20.9 Unless otherwise specified terminal blocks shall be suitable for connecting the following conductors on each side.
- | | | |
|----|------------------------------------|---|
| a) | All circuits except CT/PT circuits | Minimum of two of 2.5 sq mm copper flexible. |
| b) | All CT/PT circuits | Minimum of 4 nos. of 2.5 sq mm copper flexible. |
- 20.10 The arrangements shall be in such a manner so that it is possible to safely connect or disconnect terminals on live circuits and replace fuse links when the cabinet is live.
- 20.11 Atleast 20 % spare terminals shall be provided on each panel/cubicle/box and these spare terminals shall be uniformly distributed on all terminals rows.
- 20.12 There shall be a minimum clearance of 250 mm between the First/bottom row of terminal block and the associated cable gland plate for outdoor ground mounted marshalling box and the clearance between two rows of terminal blocks shall be a minimum of 150 mm.
- 20.13 The supplier shall furnish all wire, conduits and terminals for the necessary interphase electrical connections (where applicable) as well as between phases and common terminal boxes or control cabinets. For equipments rated for 400 kV and above the wiring required in these items shall be run in metallic ducts or shielded cables in order to avoid surge overvoltages either transferred through the equipment or due to transients induced from the EHV circuits.
- 20.14 All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The Contractor shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

SECTION –III OF TECHNICAL SPECIFICATION

21.0 LAMPS & SOCKETS

21.1 Sockets

All sockets (convenience outlets) shall be suitable to accept both 5 Amp & 15 Amp pin round Standard Indian plugs. They shall be switched sockets with shutters.

21.2 Hand Lamp:

A 240 Volts, single Phase, 50 Hz AC plug point shall be provided in the interior of each cubicle with ON-OFF Switch for connection of hand lamps.

21.3 Switches and Fuses:

21.3.1 Each panel shall be provided with necessary arrangements for receiving, distributing, isolating and fusing of DC and AC supplies for various control, signalling, lighting and space heater circuits. The incoming and sub-circuits shall be separately provided with miniature circuit breaker / switchfuse units. Selection of the main and Sub-circuit fuse ratings shall be such as to ensure selective clearance of sub-circuit faults. Potential circuits for relaying and metering shall be protected by HRC fuses.

21.3.2 All fuses shall be of HRC cartridge type conforming to IS:9228 mounted on plug-in type fuse bases. Miniature circuit breakers with thermal protection and alarm contacts will also be accepted. All accessible live connection to fuse bases shall be adequately shrouded. Fuses shall have operation indicators for indicating blown fuse condition. Fuse carrier base shall have imprints of the fuse rating and voltage.

22.0 Bushings, Hollow Column Insulators, Support Insulators:

22.1 Bushings shall be manufactured and tested in accordance with IS:2099 & IEC- 60137 while hollow column insulators shall be manufactured and tested in accordance with IEC-62155/IS:5621. The support insulators shall be manufactured and tested as per IS:2544/IEC-60168 and IEC-60273. The insulators shall also conform to IEC-60815 as applicable. The bidder may also offer composite hollow insulators, conforming to IEC-61462.

22.2 Support insulators, bushings and hollow column insulators shall be manufactured from high quality porcelain. Porcelain used shall be homogeneous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified tough and impervious to moisture.

22.3 Glazing of the porcelain shall be uniform brown in colour, free from blisters, burrs and similar other defects.

22.4 Support insulators/bushings/hollow column insulators shall be designed to have ample insulation, mechanical strength and rigidity for the conditions under which they will be used.

22.5 When operating at normal rated voltage there shall be no electric discharge between the conductors and bushing which would cause corrosion or injury to conductors, insulators or supports by the formation of substances produced by chemical action. No radio interference shall be caused by the insulators/bushings when operating at the normal rated voltage.

22.6 Bushing porcelain shall be robust and capable of withstanding the internal pressures likely to occur in service. The design and location of clamps and the shape and the strength of the porcelain flange securing the bushing to the tank shall be such that there is no risk of fracture. All portions of the assembled porcelain enclosures and supports other than gaskets, which may in any way be

SECTION –III OF TECHNICAL SPECIFICATION

exposed to the atmosphere shall be composed of completely non hygroscopic material such as metal or glazed porcelain.

- 22.7 All iron parts shall be hot dip galvanised and all joints shall be air tight. Surface of joints shall be trued up porcelain parts by grinding and metal parts by machining. Insulator/bushing design shall be such as to ensure a uniform compressive pressure on the joints.

22.8 Tests

In bushing, hollow column insulators and support insulators shall conform to type tests and shall be subjected to routine tests in accordance with IS: 2099 & IS:2544 & IS : 5621.

23.0 MOTORS

Motors shall be “Squirrel Cage” three phase induction motors of sufficient size capable of satisfactory operation for the application and duty as required for the driven equipment and shall be subjected to routine tests as per applicable standards. The motors shall be of approved make.

23.1 Enclosures

- a) Motors to be installed outdoor without enclosure shall have hose proof enclosure equivalent to IP-55 as per IS: 4691. For motors to be installed indoor i.e. inside a box, the motor enclosure, shall be dust proof equivalent to IP-44 as per IS: 4691.
- b) Two independent earthing points shall be provided on opposite sides of the motor for bolted connection of earthing conductor.
- c) Motors shall have drain plugs so located that they will drain water resulting from condensation or other causes from all pockets in the motor casing.
- d) Motors weighing more than 25 Kg. shall be provided with eyebolts, lugs or other means to facilitate lifting.

23.2 Operational Features

- a) Continuous motor rating (name plate rating) shall be at least ten (10) percent above the maximum load demand of the driven equipment at design duty point and the motor shall not be over loaded at any operating point of driven equipment that will rise in service.
- b) Motor shall be capable at giving rated output without reduction in the expected life span when operated continuously in the system having the particulars as given in Clause 15.0 of this Section.

23.3 Starting Requirements:

- a) All induction motors shall be suitable for full voltage direct-on-line starting. These shall be capable of starting and accelerating to the rated speed alongwith the driven equipment without exceeding the acceptable winding temperature even when the supply voltage drops down to 80% of the rated voltage.
- b) Motors shall be capable of withstanding the electrodynamic stresses and heating imposed if it is started at a voltage of 110% of the rated value.
- c) The locked rotor current shall not exceed six (6) times the rated full load current for all motors, subject to tolerance as given in IS:325.
- d) Motors when started with the driven equipment imposing full starting torque

SECTION –III OF TECHNICAL SPECIFICATION

under the supply voltage conditions specified under Clause 15.0 shall be capable of withstanding atleast two successive starts from cold condition at room temperature and one start from hot condition without injurious heating of winding. The motors shall also be suitable for three equally spread starts per hour under the above referred supply condition.

- e) The locked rotor withstand time under hot condition at 110% of rated voltage shall be more than starting time with the driven equipment of minimum permissible voltage by at least two seconds or 15% of the accelerating time whichever is greater. In case it is not possible to meet the above requirement, the Bidder shall offer centrifugal type speed switch mounted on the motor shaft which shall remain closed for speed lower than 20% and open for speeds above 20% of the rated speed. The speed switch shall be capable of withstanding 120% of the rated speed in either direction of rotation.

23.4 Running Requirements:

- a) The maximum permissible temperature rise over the ambient temperature of 50 degree C shall be within the limits specified in IS:325 (for 3 - phase induction motors) after adjustment due to increased ambient temperature specified.
- b) The double amplitude of motor vibration shall be within the limits specified in IS: 4729. Vibration shall also be within the limits specified by the relevant standard for the driven equipment when measured at the motor bearings.
- c) All the induction motors shall be capable of running at 80% of rated voltage for a period of 5 minutes with rated load commencing from hot condition.

23.5 TESTING AND COMMISSIONING

An indicative list of tests is given below. Contractor shall perform any additional test based on specialities of the items as per the field Q.P./Instructions of the equipment Contractor or Purchaser without any extra cost to the Purchaser. The Contractor shall arrange all instruments required for conducting these tests alongwith calibration certificates and shall furnish the list of instruments to the Purchaser for approval.

- (a) Insulation resistance.
- (b) Phase sequence and proper direction of rotation.
- (c) Any motor operating incorrectly shall be checked to determine the cause and the conditions corrected.

ANNEXURE-A

CORONA AND RADIO INTERFERENCE VOLTAGE (RIV) TEST

1. General

Unless otherwise stipulated, all equipment together with its associated connectors, where applicable, shall be tested for external corona (for 400kV & above) both by

SECTION –III OF TECHNICAL SPECIFICATION

observing the voltage level for the extinction of visible corona under falling power frequency voltage and by measurement of radio interference voltage (RIV) for 132kV and above.

2. Test Levels:

The test voltage levels for measurement of external RIV and for corona extinction voltage are listed under the relevant clauses of the specification.

3. Test Methods for RIV:

- 3.1 RIV tests shall be made according to measuring circuit as per International Special-Committee on Radio Interference (CISPR) Publication 16-1(1993) Part -1. The measuring circuit shall preferably be tuned to frequency with 10% of 0.5 Mhz but other frequencies in the range of 0.5 MHz to 2 MHz may be used, the measuring frequency being recorded. The results shall be in microvolts.
- 3.2 Alternatively, RIV tests shall be in accordance with NEMA standard Publication No. 107-1964, except otherwise noted herein.
- 3.3 In measurement of, RIV, temporary additional external corona shielding may be provided. In measurements of RIV only standard fittings of identical type supplied with the equipment and a simulation of the connections as used in the actual installation will be permitted in the vicinity within 3.5 meters of terminals.
- 3.4 Ambient noise shall be measured before and after each series of tests to ensure that there is no variation in ambient noise level. If variation is present, the lowest ambient noise level will form basis for the measurements. RIV levels shall be measured at increasing and decreasing voltages of 85%, 100%, and 110% of the specified RIV test voltage for all equipment unless otherwise specified. The specified RIV test voltage for 765kV, 400 kV, 220 KV is listed in the detailed specification together with maximum permissible RIV level in microvolts.
- 3.5 The metering instruments shall be as per CISPR recommendation or equivalent device so long as it has been used by other testing authorities.
- 3.6 The RIV measurement may be made with a noise meter. A calibration procedure of the frequency to which noise meter shall be tuned shall establish the ratio of voltage at the high voltage terminal to voltage read by noise meter.

4. Test Methods for Visible Corona

The purpose of this test is to determine the corona extinction voltage of apparatus, connectors etc. The test shall be carried out in the same manner as RIV test described above with the exception that RIV measurements are not required during test and a search technique shall be used near the onset and extinction voltage, when the test voltage is raised and lowered to determine their precise values. The test voltage shall be raised to 110% of specified corona extinction voltage and maintained there for five minutes. In case corona inception does not take place at 110%, test shall be stopped, otherwise test shall be continued and the voltage will then be decreased slowly until all visible corona disappears. The procedure shall be repeated at least 4 times with corona inception and extinction voltage recorded each time. The corona extinction voltage for purposes of determining compliance with the specification shall be the lowest of the four values at which visible corona (negative or positive polarity) disappears. Photographs with laboratory in complete darkness shall be taken under test conditions, at all voltage

SECTION –III OF TECHNICAL SPECIFICATION

steps i.e. 85%, 100%, and 110%. Additional photographs shall be taken at corona inception and extinction voltages. At least two views shall be photographed in each case using Panchromatic film with an ASA daylight rating of 400 with an exposure of two minutes at a lens aperture of f/5.6 or equivalent. The photographic process shall be such that prints are available for inspection and comparison with conditions as determined from direct observation. Photographs shall be taken from above and below the level of connector so as to show corona on bushing, insulators and all parts of energised connectors. The photographs shall be framed such that test object essentially, fills the frame with no cut-off.

For recording purpose, modern devices utilizing UV recording methods such as image intensifier may also be used.

- 4.1 The test shall be recorded on each photograph. Additional photograph shall be taken from each camera position with lights on to show the relative position of test object to facilitate precise corona location from the photographic evidence.
- 4.2 In addition to photographs of the test object preferably four photographs shall be taken of the complete test assembly showing relative positions of all the test equipment and test objects. These four photographs shall be taken from four points equally spaced around the test arrangement to show its features from all sides. Drawings of the laboratory and test set up locations shall be provided to indicate camera positions and angles. The precise location of camera shall be approved by Purchaser's inspector, after determining the best camera locations by trial energisation of test object at a voltage which results in corona.
- 4.3 The test to determine the visible corona extinction voltage need not be carried out simultaneously with test to determine RIV levels.
- 4.4 However, both test shall be carried out with the same test set up and as little time duration between tests as possible. No modification on treatment of the sample between tests will be allowed. Simultaneous RIV and visible corona extinction voltage testing may be permitted at the discretion of Purchaser's inspector if, in his opinion, it will not prejudice other test.

5. **Test Records:**

In addition to the information previously mentioned and the requirements specified as per CISPR or NEMA 107-1964 the following data shall be included in test report:

- a) Background noise before and after test.
- b) Detailed procedure of application of test voltage.
- c) Measurements of RIV levels expressed in micro volts at each level.
- d) Results and observations with regard to location and type of interference sources detected at each step.
- e) Test voltage shall be recorded when measured RIV passes through 100microvolts in each direction.
- f) Onset and extinction of visual corona for each of the four tests required shall be recorded.

SECTION –III OF TECHNICAL SPECIFICATION

ANNEXURE-B

SEISMIC WITHSTAND TEST PROCEDURE

The seismic withstanding test on the complete equipment (for 132kV and above) shall be carried out along with supporting structure.

The Bidder shall arrange to transport the structure from his Contractor's premises/POWERGRID sites for the purpose of seismic withstand test only. The seismic level specified shall be applied at the base of the structure. The accelerometers shall be provided at the Terminal Pad of the equipment and any other point as agreed by the Purchaser. The seismic test shall be carried out in all possible combinations of the equipment. The seismic test procedure shall be furnished for approval of the POWERGRID.

SECTION -IV
GUARANTEED TECHNICAL PARTICULARS

37.	Dimensional details	37.
	i) Overall height from mounting plane	i)
	ii) Height up to terminals from mounting plane	ii)
	iii) Mounting dimensions & diameter of mounting holes	
	iv) Terminal pad diameter and length	iv)
	v) Material of terminal pad	v)
	vi) Diameter of insulator at	vi)
	a) Top end	a)
	b) Bottom end	b)
38.	Temperature rise over an ambient temp. of 50° C (°C)	38.
39.	Transient over voltage withstand for	39.
	a) 30 seconds (KV peak)	a)
	b) 1 minute (KV peak)	b)
40.	Whether CT chartercteristic curves enclosed	40.
41.	Details of recommended support structure enclosed	41.
42.	Drawing showing clearance from earthed objects enclosed	42.
43.	Type test reports as per IEC enclosed	43.
44.	OGA drawing enclosed	44.
45.	Details of spark gap provided at the primary or secondary enclosed	45.

SECTION -IV
GUARANTEED TECHNICAL PARTICULARS

28.	Composite error at rated burden and at	28.
a)	20% rated current	a)
b)	120% rated current	b)
29.	Composite error at 25% rated burden and at	29.
a)	20% rated current	a)
b)	120% rated current	b)
30.	Quantity of oil per CT (Litres)	30.
31.	Whether spark gap/surge arrester provided at the primary	31.
32.	Standard to which oil conforms generally	32.
33.	Charteristics of oil (prior to filling)	33.
a)	Breakdown voltage (KV)	a)
b)	Dielectric dissipation constant at 90° C	b)
c)	Water content (ppm)	c)
d)	Gas content (ppm)	d)
e)	Interfacial tension at 27° C (N/m)	e)
f)	Specific resistance	f)
	i) at 90 ° C (ohm - cm)	
	ii) at 27° C (ohm - cm)	
34.	Whether currnet transformers are heremetically sealed. If so, how.	34.
35.	Total weight (kg)	35.
36.	Transport weight (kg)	36.

SECTION -IV
GUARANTEED TECHNICAL PARTICULARS

- | | | |
|-----|---|-----|
| 18. | Secondary data | 18. |
| | a) Secondary resistance at different taps. | a) |
| | b) Oversize factor and transient error under CO-t-CO duty condition of fault (100 ms) | b) |
| 19. | Maximum exciting current | 19. |
| | a) 100% Kpv (mA) | |
| | b) 25% kpv (mA) | |
| | c) 20% kpv (mA) | |
| | d) 10% kpv (mA) | |
| 20. | Instrument security factor at different ratios | 20. |
| 21. | Radio interference voltage at 1.1 Ur/(SQRT 3) at 1.0 MHz (micro volts) | 21. |
| 22. | Whether auxiliary CT/reactors provided for metering winding. | 22. |
| 23. | Conona extinction voltage (KV rms) | 23. |
| 24. | Partial discharge level (pico coulombs) | 24. |
| 25. | Total creepage distance (mm) | 25. |
| 26. | Primary | 26. |
| | a) No. of primary turms | a) |
| | b) Material and cross section of primary (cm ²) | b) |
| | c) Whther bar type or ring type primary | c) |
| 27. | Whether CT is suitable for transportation horizontally | 27. |

SECTION -IV
GUARANTEED TECHNICAL PARTICULARS

CURRENT TRANSFORMER

1.	Name and address of manufacturer	1.
2.	Manufacture's type designation	2.
3.	Standards applicable	3.
4.	Rated frequency (HZ)	4.
5.	Rated voltage U_r (KV)	5.
6.	Rated current	6.
	i) Rated continuous normal current (A)	i)
	ii) Rated extended primary Current (A)	ii)
7.	Short time thermal current withstand for 1 sec. (KA).	7.
8.	Dynamic current withstand (KA peak).	8.
9.	1.2/50 micro second impulse withstand voltage (KV peak)	9.
10.	250/2500 micro seconds switching surge withstand voltage (KV peak dry and wet)	10.
11.	One minute dry and wet power frequency withstand voltage (KV rms)	11.
12.	No. of cores per CT	12.
13.	Transformation ratio	13.
14.	No. of secondary turns (Nominal)	14.
15.	Rated output (VA) at different taps	15.
16.	Accuracy class	16.
17.	Knee point voltage (V) at different taps	17.

SECTION – V

CHECK LIST FOR 765KV CURRENT TRANSFORMER

Put a tick mark (✓) on 'YES' if the specified requirement is met, or put a tick mark on 'NO', if the specified requirement is not met and give comments in the "Remarks" column.

Sl. No.	Parameters	Data	YES/NO	Remarks
1	Manufacturer's type designation	Bidder to furnish in Remarks Col.		
2	Type of CT			
	a) Insulating medium	i. SF6	YES/NO	
		ii. Oil	YES/NO	
	b) Installation	Outdoor	YES/NO	
	c) Mounting	Upright	YES/NO	
	d) Tank design	i. Live tank	YES/NO	
		ii. Dead tank	YES/NO	
3	Standards Applicable	IEC 60044-1, IEC-60044-4 , IS-2705-(P1 to P4), ANSI-C5713	YES/NO	
4	Rated Voltage (kV rms)	765KV	YES/NO	
5	Rated Primary Current	3000A	Yes/No	
6	Rated short time thermal current	40 KA for 1(one)Sec	YES/NO	
7	Rated dynamic current	102 kA	YES/NO	
8	Max. Temperature rise over design ambient temperature	As per IEC:60044-1	YES/NO	
9	One minute power frequency withstand voltage - Secondary Terminal and Earth	5KV	YES/NO	
10	Cantilever Strength	Not less than 500Kg	YES/NO	
11	Class of Insulation	A	YES/NO	
12	Core parameters	As per table 2.0 b)	YES/NO	

TECHNICAL SPECIFICATION
765KV Current Transformer

		of Section -I		
14	External Surface			
	Steel	i. Hot dip galvanized As per Section III	YES/NO	
		ii. Painted As per Section III	YES/NO	
15	Insulator /Bushing			
	a. Material			
	i. Shedded Polymer insulator		YES/NO	
	ii. Shedded Porcelain insulator	CT conforms to the internal arc fault test (internal fault protection class-2), as a special test as per IEC-61869, with at least 40 kA internal arc fault current.”	YES/NO	
	b. One piece construction without any metallic flange joint		YES/NO	
16	Specific requirements for Oil/SF6 CT's			
	a. Oil filled CT's:			
	i. Grade of oil	EHV grade	YES/NO	
	ii. Standard to which oil conforms	IS-335 / IEC-60296	YES/NO	
	iii. Oil filling and drain plug provided.		YES/NO	
	iv. Oil sight glass provided		YES/NO	
	b. SF6 filled CT's:			

TECHNICAL SPECIFICATION
765KV Current Transformer

	i. Standard to which gas conforms	IEC-60376,60376A,60376B	YES/NO	
	ii. Suitable SF6 gas density monitoring device		YES/NO	
	iii. NO/NC contacts available in SF6 gas density monitoring device for remote annunciation and tripping in case of SF6 leakage		YES/NO	
	iv. Provision for online gas filling		YES/NO	
	v. Suitable rupture disc provided to prevent explosion.		YES/NO	
17	Hermetic Sealing			
	a. Hermetically Sealed		YES/NO	
	b. Details of arrangement made for Hermetical sealing of the CT's are available and shall be furnished for approval at contract stage .		YES/NO	
	c. Details of Site test to check the effectiveness of the hermetic sealing are available and shall be furnished for approval at contract stage .		YES/NO	
18	Polarity of CT permanently marked		YES/NO	
19	Impregnation details along with Test/Checks : to ensure successful completion of impregnation cycle are available and shall be furnished for approval at contract stage		YES/NO	
20	Name Plate			
	As per IEC standards, and shall clearly indicate Year of manufacture,		YES/NO	

TECHNICAL SPECIFICATION
765KV Current Transformer

	Rated current , Extended current rating & rated thermal current			
21	Terminal Box -Ingress Protection	IP 55	YES/NO	
22	In case of “Bar primary” inverted type CT	The CT conforms to the additional requirements specified under 3.0 a) of Section –II. Clauses .i,ii,iii,iv,v	YES/NO	
23	Rated extended current	As per 3.0 g) of Section –II.	YES/NO	
24	Packing & Transportation			
	a. CT suitable for horizontal transportation.		YES/NO	
	b. Details of packing design shall be furnished for review at contract stage .		YES/NO	
25	CT suitable for mounting on lattice support structure.		YES/NO	
26	CT suitable for High speed auto-reclosing.		YES/NO	
27	Details of measures taken to achieve minimum risk of explosion of the CT in service is attached along with this offer.		YES/NO	
28	The CT manufacturer meets the Qualifying requirements specified in Section-I , 3.0 of this Technical Specification.		YES/NO	
30	Valid Type test reports as per Section-II , 6.0 shall be submitted at contract stage.		YES/NO	
31	The list of equipments required for conducting pre commissioning test as specified in 9.0 of Section II shall be submitted for approval during contract stage		YES/NO	
32	Confirmation to clause 6.0 of Section –I pertaining to TYPE TESTING, INSPECTION, TESTING & INSPECTION CERTIFICATE		YES/NO	

TECHNICAL SPECIFICATION
765KV Current Transformer

33	List of Deviations if any , is attached along with offer		YES/NO	
34	List of all special tools and tackles as per Clause 7.0 of Section-I of this technical Specification shall be furnished during Contract stage .		YES/NO	
35.	Following Documents are attached along with the offer :			
	a. Filled Checklist.		YES/NO	
	b. Filled GTP		YES/NO	
	c. Documents to support the qualifying requirements of the Equipment manufacturer 'as per clause 3.0 of Section-I' of this Technical Specification.		YES/NO	