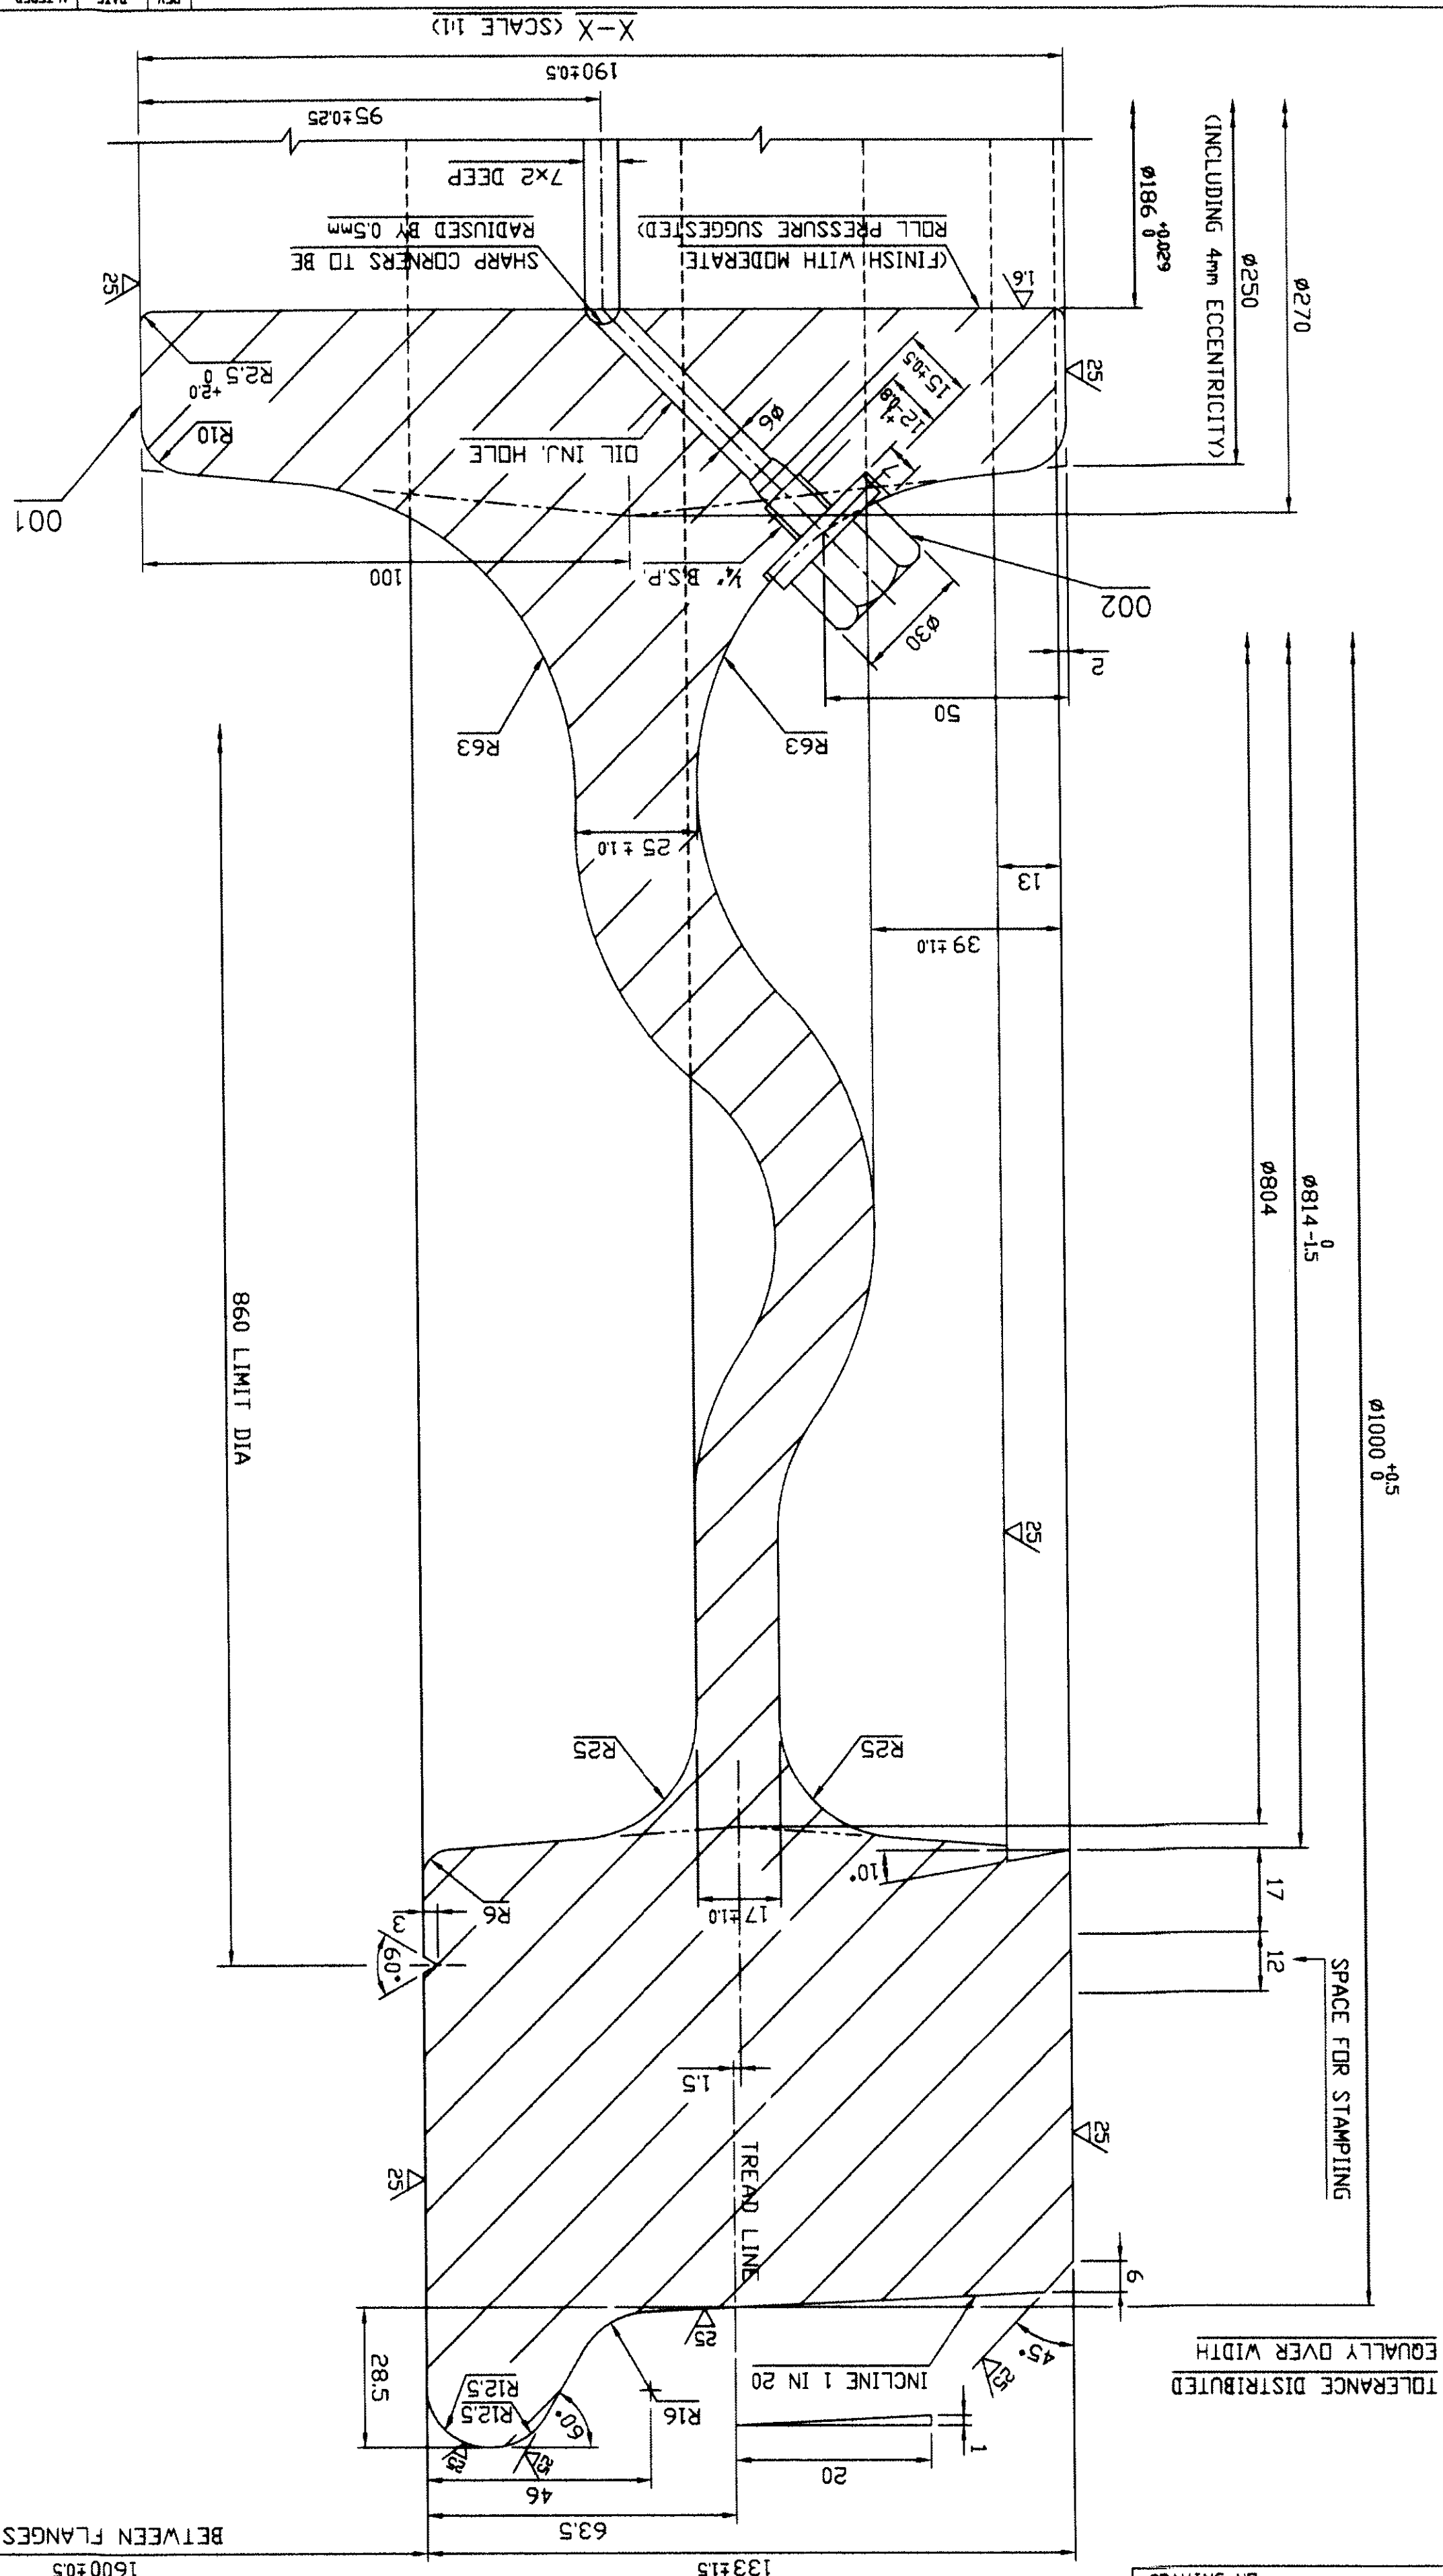




NOTE:-

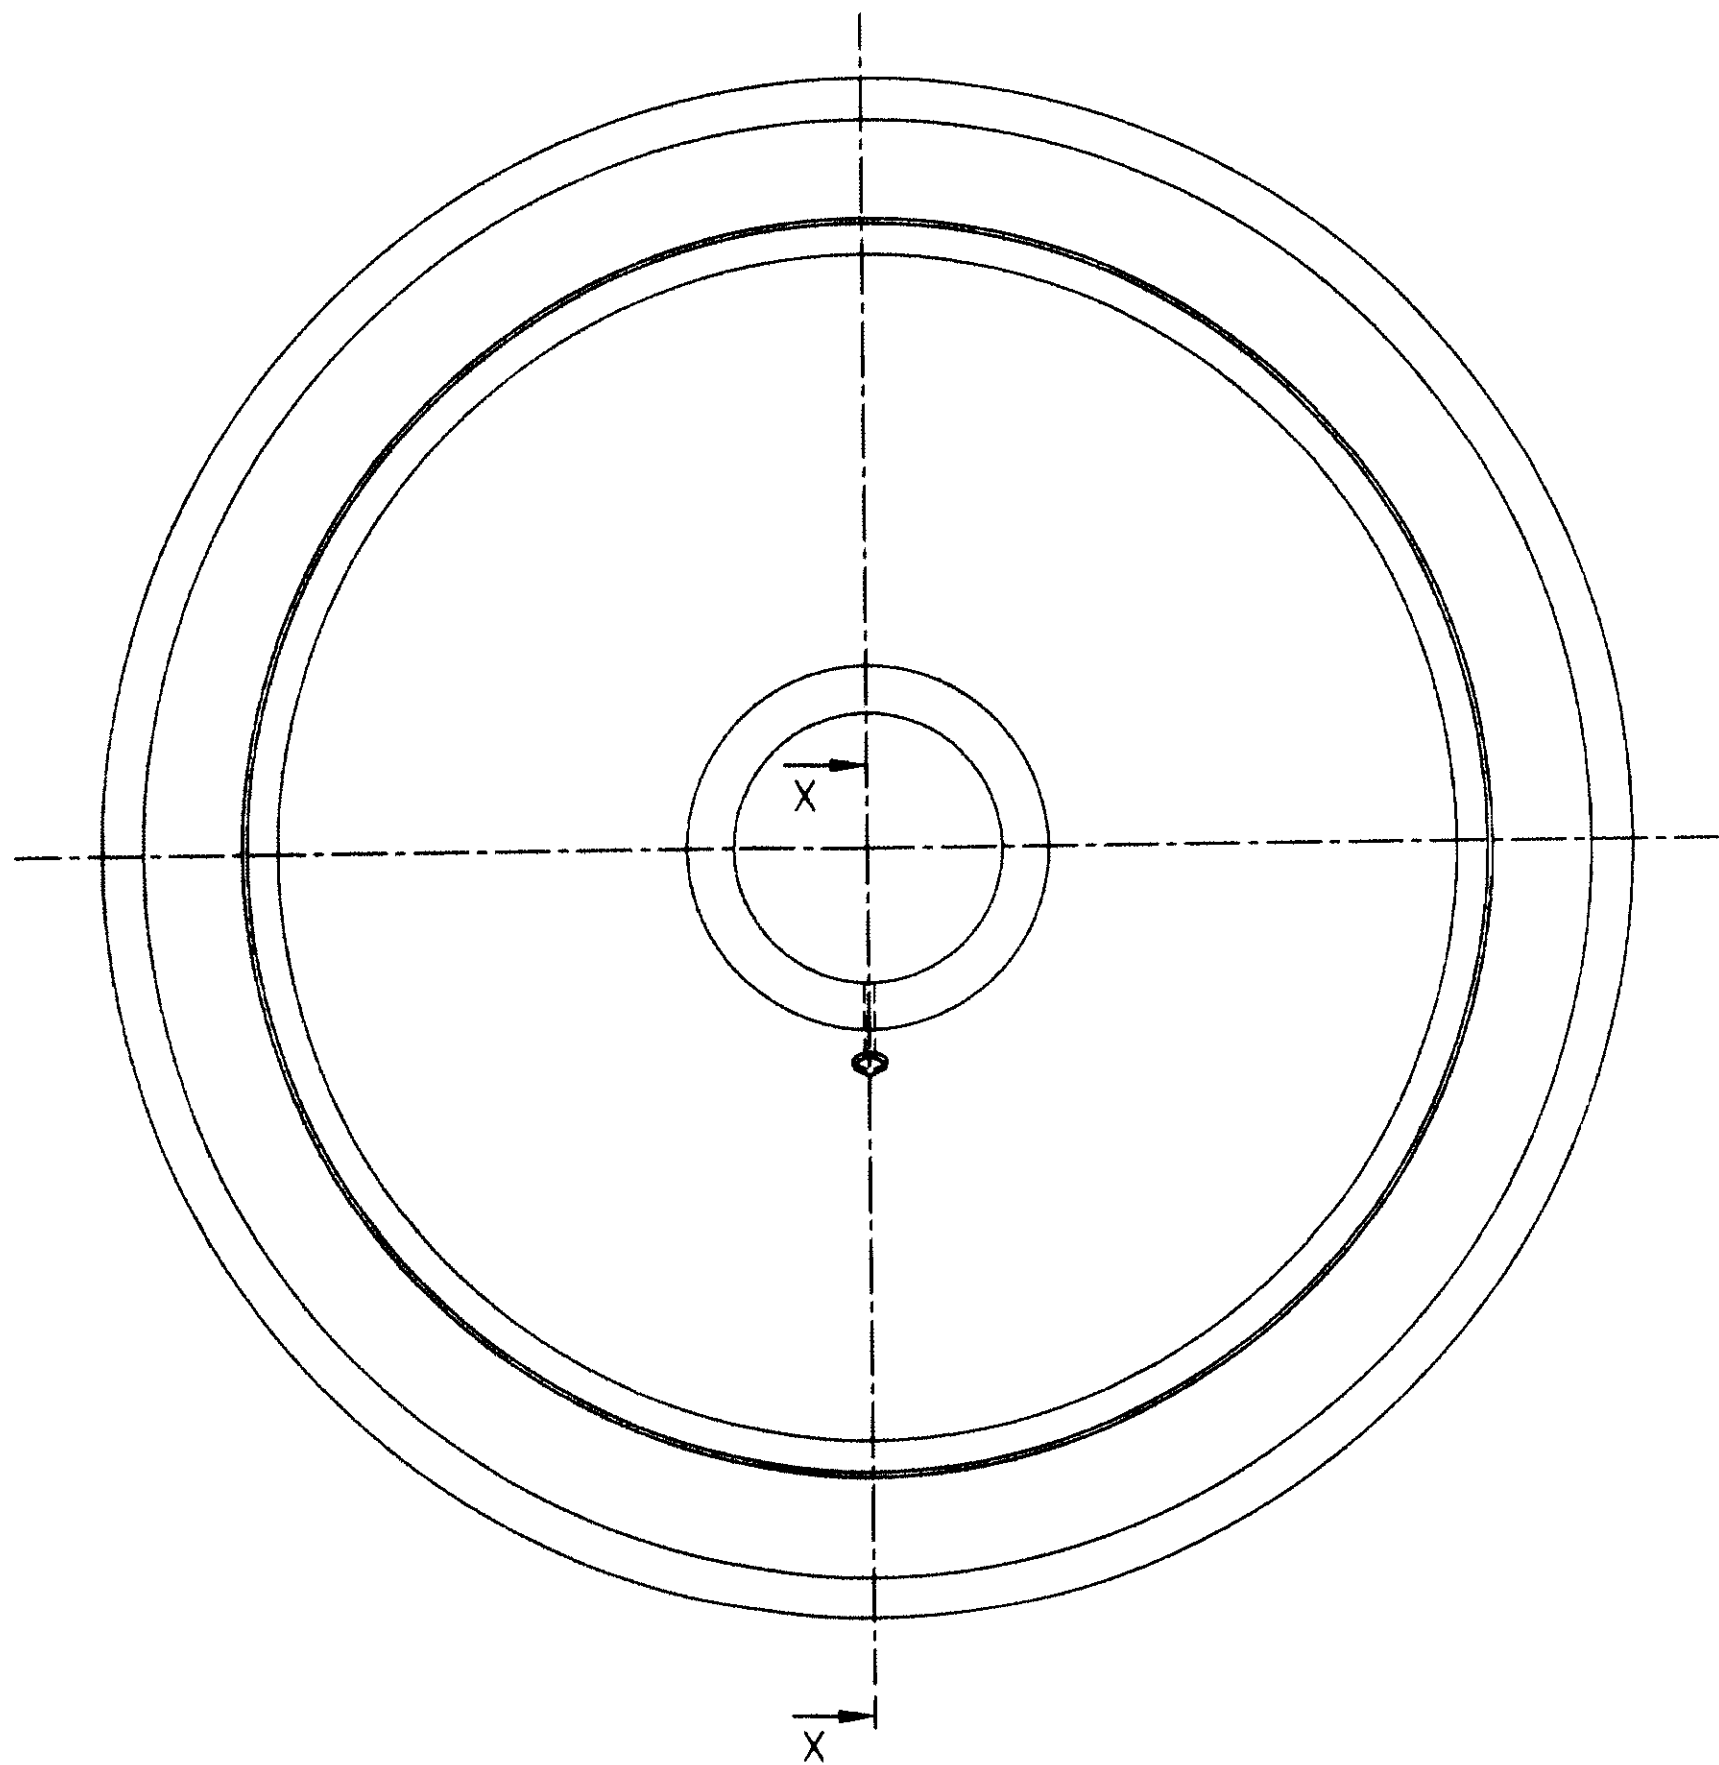
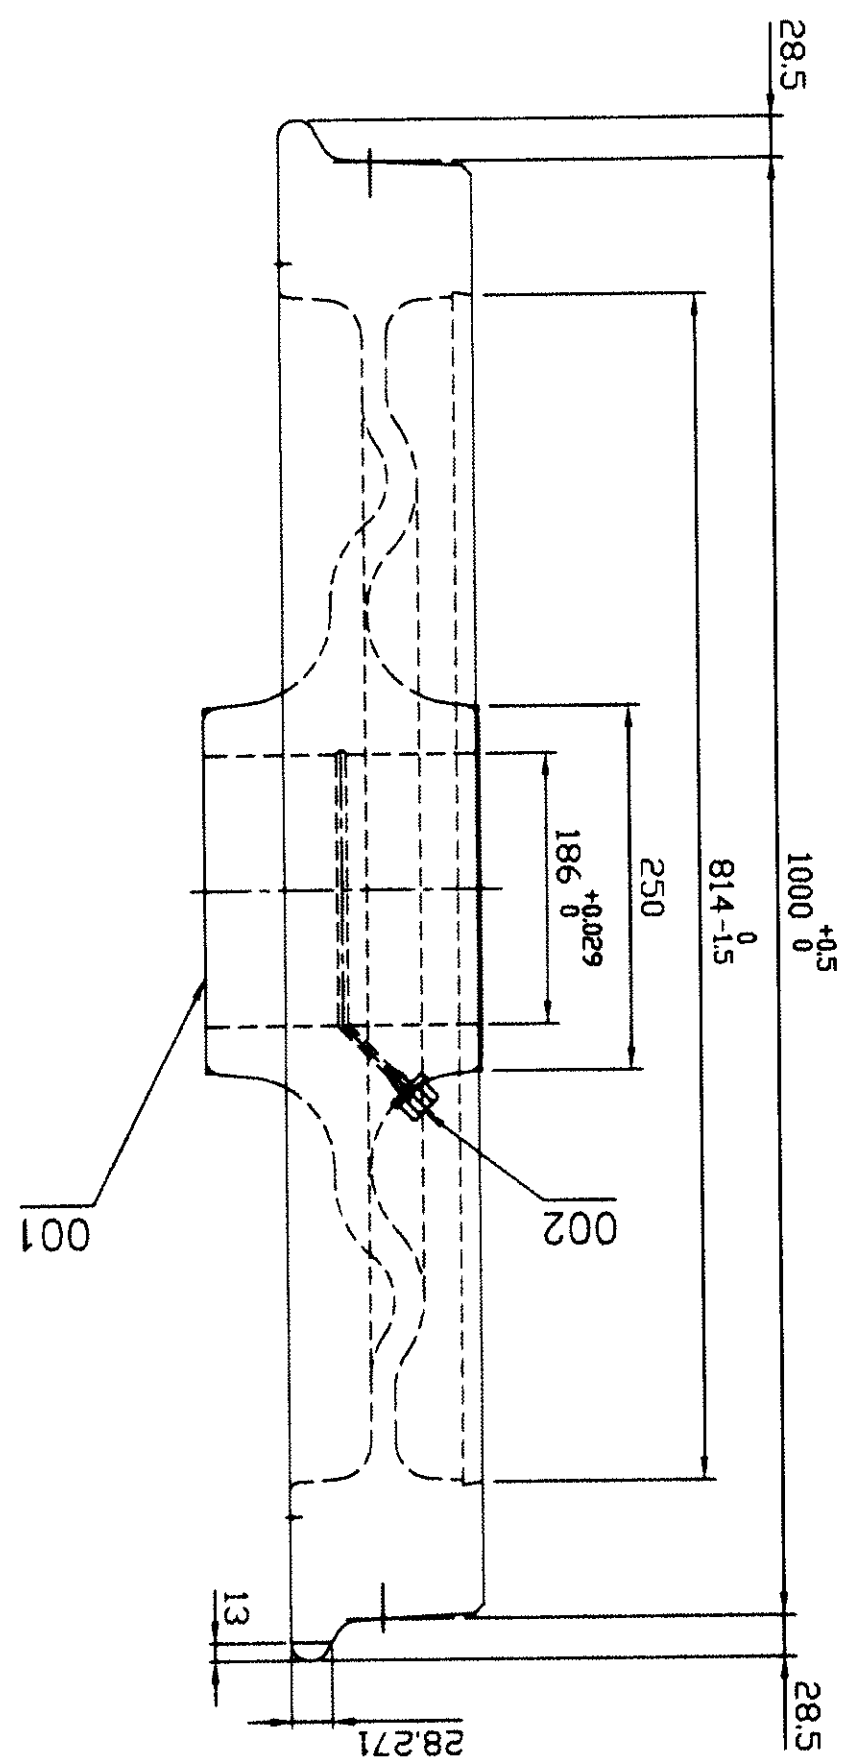
(1) THE FINISHED BORE TO BE COATED LIBERALLY BY SUITABLE PETROLIUM JELLY.

(2) OTHER SURFACES TO BE GIVEN TWO COATS OF RED OXIDE PRIMER AFTER SHOT BLASTING (PROTECT THE BORE, WHILE SHOT BLASTING).

FINALLY OUT SIDE SURFACE OF RIM TO BE GIVEN TWO COATS OF SILVER WHITE SYNTHETIC ENAMEL. REMAINING SURFACE TO BE GIVEN TWO COATS OF MATT BLACK SYNTHETIC ENAMEL.

2. ITEM 002 TO BE CADMIUM PLATED AND PASSIVATED TO 0050TK.

STYLE LIST					
STYLE NO.	ITEM	DESCRIPTION	VERIFIED	SIGN.	DATE
	VAR				
958510	00	WHEEL (DIA 1000)			

[illegible]

DIMNL. TOL:- _____
AS PER CORP. STD. AA 023 02 08 MEDIUM
GRADE UNLESS OTHERWISE STATED.

(ALL DIMENSIONS ARE IN MM)

FIRST ANGLE PROJECTION

DRAWING NO.
1 718 11 01 022