

**ORISSA POWER GENERATION COMPANY
LIMITED**

**2 X 660 MW (UNIT #3 & 4) IB THERMAL POWER
STATION, BANHARPALI**

VOLUME – II

***TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER***

BHEL DOCUMENT NO. : PE-TS-391-510-E001, REV-0



**BHARAT HEAVY ELECTRICALS LIMITED
POWER SECTOR
PROJECT ENGINEERING MANAGEMENT
NOIDA, UTTARPRADESH, INDIA – 201301**



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0 | DATE: 30.07.14

SHEET 1 OF 1

CONTENTS

<u>S. NO.</u>	<u>CONTENTS</u>	<u>NO. OF SHEETS</u>
01	INSTRUCTIONS TO BIDDERS	01
02	PREAMBLE	01
03	SECTION – 'A' SCOPE OF ENQUIRY	01
04	SECTION – 'B' PROJECT INFORMATION	04
05	SECTION – 'C' SPECIFIC TECHNICAL REQUIREMENT	23
06	SECTION – 'C' DATA SHEET-A	03
07	SECTION – 'C' ATTACHMENT-I	01
08	SECTION – 'C' ATTACHMENT-II	01
09	SECTION – 'C' ATTACHMENT-III	01
10	SECTION – 'C' PRICE SCHEDULE	02
11	SECTION – 'C' DATA SHEET-B	08
12	SECTION – 'C' DATA SHEET-C	08
13	SECTION- 'D' GENERAL TECHNICAL REQUIRMENTS	12

TOTAL NO. OF SHEETS =67 (INCLUDING COVER/ SEPARATOR SHEETS)

**IT IS CONFIRMED THAT OUR TECHNICAL OFFER COMPLIES WITH THE SPECIFICATION IN TOTO, & THAT
THERE ARE NO TECHNICAL DEVIATIONS.**

BIDDER'S STAMP & SIGNATURE
(REFER INSTRUCTION NO. 1 OF 'INSTRUCTIONS TO BIDDERS')



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0

DATE: 30.07.14

SHEET 1 OF 1

INSTRUCTIONS TO BIDDERS FOR PREPARING TECHNICAL OFFERS

1. In line with clause no. 6.0 of Section-C, Volume-II-B of the specification, two signed and stamped copies of the following shall be furnished by all bidders as technical offer:
 - a. Unpriced BOQ-Cum-Price Schedule with 'QUOTED' word against each item with bidder's signature and company stamp.
 - b. A copy of this sheet ("Instructions to Bidders for Preparing Technical Offer"), with bidder's signature and company stamp.
 - c. A copy of previous sheet ("List of Contents"), with bidder's signature and company stamp.
 - d. Other document as listed in clause no. 6.0 of Sec-C, Vol-II-B.
2. Confirmations/ comments (if any) regarding delivery schedules shall be furnished as part of the commercial offer. Any reference elsewhere/ covering letter of technical offer shall not be considered by BHEL.
3. Any comments/ clarifications on technical/ inspection requirements furnished as part of bidder's covering letter shall not be considered by BHEL, and bidder's offer shall be construed to be in conformance with the specification.
4. Any changes made by the bidder in the price schedule with respect to the GCB description/ quantities, notes etc. from those given in BOQ-Cum-Price Schedule of specification shall not be considered (i.e., technical description, quantities, notes etc. as per specification shall prevail).

BIDDER'S STAMP & SIGNATURE



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0 | DATE: 30.07.14

SHEET 1 OF 1

PREAMBLE

1.0 The Tender document contains three Volumes. The Bidder shall meet the requirements of all three Volumes.

1.1 VOLUME: I CONDITIONS OF CONTRACT

This consists of four parts as below:

Volume-IA: This Part contains instructions to Bidders for making Bids to BHEL.

Volume-IB: This Part contains General Commercial Conditions of the Tender & includes provision that Vendor shall be responsible for the Quality of item supplied by their Sub-Vendors.

Volume-IC: This Part contains Special Conditions of Contract.

Volume-ID: This Part contains Commercial Conditions for Erection & Commissioning Site Work as applicable.

1.2 VOLUME: II TECHNICAL SPECIFICATIONS

Technical requirements are stipulated in Volume-II, which comprises of :

Volume-IIA: General Technical Conditions.

Volume-IIB: Technical Specification.

Volume –IIB is sub-divided in to following Sections.

Section-A: This Section outlines the Scope of enquiry.

Section-B: This Section provides Project information.

Section-C: This Section indicates Specific Requirements.

Data Sheet A (Specified Data)

Attachment-I

Attachment-II

Attachment-III

Attachment-IV

Section-D: This Section comprises the following:

Technical Specification/Requirements

Data Sheet C (Data / Documents to be furnished after the award of Contract).

1.3 VOLUME: III TECHNICAL SCHEDULES

This Volume contains the following:

Data Sheet – B (To be duly filled by Bidder and furnished with the Technical Bid.)

Note: In case of mismatch in requirements in different portion of this specification order of precedence shall be Data Sheet A of Sec-C then Specific Technical requirement of Sec-C and then Section D.



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0 | DATE: 30.07.14

SHEET 1 OF 1

SEC-A

SCOPE OF ENQUIRY

- 1.0 This specification covers design, manufacture, assembly, inspection & testing at manufacturer's works, proper packing, delivery to site and supervision of E&C of Generator Circuit Breaker as mentioned in different sections of this specification, complete with all accessories for efficient and trouble-free operation of **2 X 660 MW (UNIT #3 & 4) IB THERMAL POWER STATION, BANHARPALI**
- 2.0 It is not the intent to specify completely herein all details of the design and manufacture. However, the equipment shall conform in all respects to high standards of design engineering and workmanship and shall be capable of performing in continuous commercial operation up to bidder's guarantee.
- 3.0 The general terms and conditions, instruction to bidders and other attachment referred to elsewhere are hereby made part of the Technical Specification.
- 4.0 The Bidder shall be responsible for and governed by all requirements stipulated hereinafter.
- 5.0 Bidders shall confirm total compliance to the specification without any deviations from the technical/ quality assurance requirements stipulated..
- 6.0 The documents shall be in English language and MKS system of units.



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0

DATE: 30.07.14

SHEET 1 OF 1

SECTION - B



TITLE

PROJECT INFORMATION - ELECTRICAL DATA

2 X660MW IB THERMAL POWER STATION, BANHARPALLI

Ambient temperature for Design of electrical equipment in non-air conditioned area	:	50°C
Ambient temperature for Design of electrical equipment in air-conditioned area	:	PEM(MAUX) /EDN, B'lore to furnish.
Relative humidity for design of electrical equipment	:	87%
AC Voltage Level For Aux Power Distribution	:	11 KV, 3 phase, 3 wire 3.3 KV, 3 phase, 3 wire 415 V, 3 phase, 4 wire
Rated frequency	:	50 Hz.
Voltage & Frequency variation	:	All equipment shall be suitable for Voltage variation of $\pm 10\%$, frequency variation of (+) 3% to (-) 5% and 10% combined variation (sum of absolute values) of voltage and frequency.
The voltage level for motor shall be as follows:		
• Above 1500 KW	:	11 KV
• Above 200 KW & upto 1500 KW	:	3.3 KV
• Upto 200 KW	:	415 V
AC control voltage	:	240 V, 1ph, 50 HZ
UPS Voltage	:	240 V, 1ph, 50 Hz
DC Voltage for motor, protection, control and emergency lighting	:	220 V
DC Voltage for control & instrumentation	:	24 V
AC Voltage for lighting, Space heating	:	240 V, 1ph, 50 Hz
AC emergency supply	:	415V; 3 Ph; 3 wire
DC Voltage variation	:	187 V - 242 V for 220 V DC



TITLE

PROJECT INFORMATION - ELECTRICAL DATA

2 X660MW IB THERMAL POWER STATION, BANHARPALLI

Fault levels:

400KV System	:	50 kA
11KV System	:	40 kA
3.3KV System	:	40 kA
415V System	:	50 kA
220V DC System	:	25 kA

Grounding:

a).	400KV System	:	Solidly grounded
b).	Generator	:	High resistance grounded through distribution Transformer, transformer secondary loaded with resistor.
c).	11KV System	:	Low Resistance Grounded with Earth-Fault Current limited to 300A
d).	3.3KV System	:	Low Resistance Grounded with Earth-Fault Current limited to 300A
e).	415V System	:	Solidly grounded
f).	220V DC System	:	Ungrounded
g).	Diesel Generator	:	Ungrounded



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION


**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0



DATE: 30.07.14

SHEET 1 OF 1

SECTION - C

	Orissa Power Generation Corporation Ltd.	Technical Specification for Main Plant Package	IB TPS – 2 X 660 MW Units 3&4, Jharsuguda, Orissa
---	--	--	---

VOLUME : IIF/1
SECTION-XII
TECHNICAL SPECIFICATION
FOR
GENERATOR CIRCUIT BREAKER



Doc. No. K8B09-MP-SPC-G-001		Development Consultants Pvt. Ltd.
-----------------------------	--	-----------------------------------

(K8B09-MP-V-II-F1-ELE12_OPGC_CONTRACT-BHEL)




CONTENT

CLAUSE NO.	DESCRIPTION	PAGE NO.
1.00.00	SCOPE OF WORK	V.IIF-1/ S-XII : 1
2.00.00	CODES AND STANDARDS	V.IIF-1/ S-XII : 1
3.00.00	DESIGN CRITERIA	V.IIF-1/ S-XII : 2
4.00.00	SPECIFIC REQUIREMENTS	V.IIF-1/ S-XII : 3
5.00.00	TESTS	V.IIF-1/ S-XII : 10
6.00.00	SPECIAL TOOLS & TACKLES	V.IIF-1/ S-XII : 11
7.00.00	SPARES	V.IIF-1/ S-XII : 11
8.00.00	DRAWINGS, DATA & MANUALS	V.IIF-1/ S-XII : 11

ATTACHMENTS

ANNEXURE - A	RATINGS AND REQUIREMENTS	V.IIF-1/ S-XII/Annx-A : 13
ANNEXURE - B	FITTINGS AND ACCESSORIES	V.IIF-1/ S-XII/Annx-B : 18



	Orissa Power Generation Corporation Ltd.	Technical Specification for Main Plant Package	IB TPS – 2 X 660 MW Units 3&4, Jharsuguda, Orissa
---	--	--	---



VOLUME : IIF-1

SECTION-XII

TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER

- 1.00.00 **SCOPE OF WORK**
- 1.01.00 **SCOPE OF SUPPLY** 23595A
- 1.01.01 21 KV (tentative), ~~24000A~~ Generator Circuit Breaker Assembly: Two (2) sets of 3-phase units.
- 1.01.02 Following Auxiliary equipment shall be supplied
 - a. One (1) set of Portable SF₆ gas evacuating & filling equipment
 - b. Two (2) sets of SF₆ gas leakage detectors
 - c. One (1) set of Circuit breaker operation analyzer.
- 1.01.03 One set of special tools and tackles.
- 1.01.04 Mandatory spare parts.
- 1.01.05 Not Used.
- 1.01.06 All relevant drawings, data and instruction manuals.
- 1.02.00 The GCBs supplied by Bidder shall be installed by erection contractor appointed by Buyer. The Technical Advisory Personnel of Bidder shall be responsible for witnessing and approval of all critical erection works and commissioning of the equipment. The Bidder shall review the installation requirements mentioned and incorporate necessary requirements in the design.
- 2.00.00 **CODES AND STANDARDS**
- 2.01.01 Generator Circuit Breaker shall be designed, manufactured and tested in accordance with IEEE Standard C37.013-1997 All other equipment and materials shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards (IS) and IEC except where modified and/or supplemented by this specification.
- 2.01.02 Equipment and material conforming to any other standards, which ensure equal or better quality, may be accepted. In such case the Bidder shall provide details how his standard comply with Buyer's requirement and shall furnish duly certified copies of the English version of the standard adopted shall be submitted along with the bid.

Doc. No. K8B09-MP-SRC-G-001 (K8B09-MP-V-II-F1-SW-F2) OPGC_CONTRACT-BHEL)	V.II-F1/S-XII : 1	Development Consultants Pvt. Ltd.
---	-------------------	-----------------------------------



571



2.01.03 The electrical installation shall meet the requirements of Indian Electricity Rules 1956 as amended upto date and relevant IS Code of Practice(Refer Annexure-D, Section-I, Volume-II F1). In addition, other rules and regulations applicable to the work shall be followed.

3.00.00 **DESIGN CRITERIA**

3.01.00 The Generator Circuit Breaker assembly shall be designed, manufactured, and tested in accordance with IEEE Standard C37.013-1997 and it's latest Interpretations and amendment.

3.02.00 The Generator Circuit Breaker shall be installed in between the Generator and Generator Transformer and shall be connected to both the equipment with isolated phase bus duct.

3.03.00 The generator circuit-breaker shall be capable of continuous operation under the following condition :

- Voltage variation : ± 10%
- Frequency variation : +3 to - 5%
- Combined voltage and frequency variation : 10% (absolute sum)

3.04.00 Generator circuit breaker shall be suitable for synchronizing duty. Main functions of the Generator Circuit Breaker system shall be the following


- Start up of the turbo-generator auxiliaries via its unit transformer with the GCB open
- Carry the full load current of the generator continuously
- Paralleling of the generator with external network
- Disconnection of the generator from the system under various loading conditions ranging from no load to full load
- Make and break generator-source feed short-circuit currents
- Make and break system-source feed short-circuit currents

3.05.00 The Generator Circuit Breaker shall be located indoor/ ~~outdoor~~, hot, humid and tropical atmosphere.

3.06.00 For continuous operation at specified ratings, temperature rise of the various circuit breaker components such as insulating materials, main contacts, conducting joints and parts subject to contact by operating personnel shall be limited to the permissible values stipulated in the relevant standards and/or this specification.


3.07.00 Circuit breaker shall be preferably naturally cooled or forced cooled as defined in the annexure. For forced cooled Generator Circuit Breaker, emergency current rating during loss of cooling shall be established according to the IEEE Standard and incorporated in the design.

3.08.00 The Circuit Breaker and components thereof shall be capable of withstanding the mechanical forces and thermal stresses of the short circuit current listed in the annexure without any damage or deterioration of material.

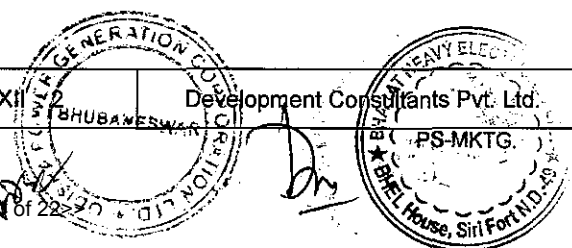



- 3.09.00 Each pole of the circuit breaker, series disconnectors, earth switch and additional components, if any specified in Annexure-B, shall be mounted in single phase non-magnetic aluminum alloy enclosures. The three single-phase enclosures along with the Control box housing the operating mechanism, supervisory and control equipment shall be factory assembled on a common frame.
- 3.10.00 The enclosure shall be able to carry the induced reverse current flowing through the isolated phase bus duct. All enclosure connection to isolated phase bus duct shall be welded or via a bellow to provides a physically and electrically continuous ducting connection to the generator and the transformer.
- 3.11.00 The distance among the centre line of the phase enclosures shall be such that it matches with the bus duct spacing.
- 3.12.00 The circuit breaker movement during short circuit shall be restricted so as to limit the stresses on circuit breaker support insulators within their capabilities.
- 4.00.00 **SPECIFIC REQUIREMENTS (as applicable based on Manufacturers Standards).**
- 4.01.00 **Type and Duty**
- 4.01.01 The Generator circuit breaker shall consist of three nos. single-pole interrupter housed in sulphur hexafluoride (SF₆) breaking chambers.
- 4.01.02 The duty of the circuit breaker shall involve satisfactory interruption of short circuit currents as listed in the annexure-A of this section.
- 4.01.03 The breaker shall be suitable for operation under out of phase condition arising out of faulty synchronization.
- 4.01.04 Breakers with multi-break interruptions shall be so designed that the voltage developed across a pole is uniformly distributed over the power breaks.
- 4.02.00 **Constructional Feature**
- 4.02.01 Each Generator circuit breaker shall comprise of three (3) identical poles complete with auxiliary components housed in single-phase enclosures, all fully assembled on a common frame with mechanical gang operated mechanism.
- 4.02.02 All CB poles shall be maintained at the same SF₆ density by a suitable balancing connection via the refilling pipe. The SF₆ gas density shall be monitored and regulated by temperature compensated gas density monitoring devices, which shall be mounted at a convenient and easily approachable location. The device shall signal loss of SF₆ gas in several steps for refilling, alarm and blocking annunciation. The system shall also be provided with a Gas density meter.
- 4.02.03 The circuit breaker shall have proper sealing so that leakage of gas outside is not more than 0.5% per annum under all conditions of operation.







The operating rod connecting the operating mechanism to the arc chamber (SF₆ media) shall have adequate seals. All gasketed surfaces shall be smooth, straight and reinforced, if necessary, to minimise distortion and make a tight seal

- 4.02.04 SF₆ breakers shall be furnished with first charge of SF₆ gas
- 4.02.05 The circuit breaker units shall be complete with associated valves, piping, gauges, seals, lubricants and other accessories/materials to ensure their proper assembly and functioning.
- 4.02.06 Suitable provisions shall be made for connection with Isolated Phase Busducts (IPB) through flexible connection.
- 4.02.07 All Breakers shall have locking facility in open condition for safety during maintenance.
- 4.03.00 **Power Contacts**
- 4.03.01 The circuit breaker shall have two separate power contact systems, one for carrying the normal load current and one for arc interruption.
- 4.03.02 The main contacts shall have adequate area and contact pressure for carrying rated continuous and short time current without excessive heating liable to cause pitting and welding.
- 4.03.03 The contacts shall be easily replaceable and shall have minimum movable parts and adjustments.
- 4.04.00 **Auxiliary Contacts**
- 4.04.01 Each breaker shall be provided with minimum six (6) normally open and six (6) normally closed electrically separate spare auxiliary contacts, in addition to those required for its own operation and indication.
- 4.04.02 The auxiliary contacts shall be convertible type so that normally open contacts can be converted into normally close contact and vice versa at site.
- 4.04.03 The auxiliary contacts shall be rated 10A at 240 V A.C. and 2A at 220 V D.C.
- 4.05.00 **Interlock**
- 4.05.01 All electrical and mechanical interlocks, which are necessary for safe and satisfactory operation of the circuit breaker, shall be furnished.
- 4.05.02 Breaker operation shall be locked in case of low SF₆ gas density and/or low control fluid pressure at preset values. Alarms shall be provided for low gas density and low control fluid pressure at values higher than lockout density of SF₆ gas and/or fluid pressure.
- 4.05.03 Gas density monitoring contacts, pressure switch contacts, etc. shall be suitable for direct use as permissive in closing, tripping, annunciation and control circuits.

DC supplies for all auxiliary circuits shall be monitored and provision shall be made for remote annunciations





4.06.00 **Operating Mechanism**

4.06.01 Circuit Breaker operating mechanism hydraulic charged spring operating mechanism or motorized spring charged operating mechanism ~~pneumatically or hydraulically controlled spring energy storage type~~. Anti-pumping and trip free features complete with 2x100% shunt trip coils shall be provided. The mechanism of the breaker shall be such that the position of the breaker is maintained even after leakage of operating media and/or gas.



4.06.02 All three breaker poles shall close simultaneously. Pole discrepancy feature shall be provided to trip the breaker out if all the poles do not close simultaneously within the stipulated time.

4.06.03 The mechanism shall be designed for electrical control from remote as well as local position. In addition local manual trip button shall be provided.

4.06.04 Operation counter and mechanical ON-OFF indicator shall be provided for the breaker.

4.06.05 The close and trip circuits shall be designed to permit use of momentary contact switches and push buttons.

4.06.06 Circuit breaker shall be provided with two (2) independent tripping circuits, and trip coils. The trip coils shall be suitable for trip circuit supervision during both open and close positions of the breaker.

4.06.07 **Hydraulic Operated mechanism**


Hydraulically operated mechanism shall comprise of operating unit with power cylinder, control valves, high and low pressure reservoir, motor etc. one number hand pump set shall also be provided for emergency operation of the circuit breaker.

The mechanism shall be capable of operating the circuit breaker and performing the duty cycle specified under all conditions with the pressure of hydraulic operated fluid in the operating mechanism at the lowest permissible pressure before make up. The opening time at the lowest pressure for a particular operation shall not exceed the guaranteed operating time within any value of trip coil supply voltage as specified.

The mechanism shall be suitable for at least two close open operations after failure of AC supply to the motor starting at pressure equal to the lowest pressure of auto recluse duty.

The oil pressure switch controlling the pump and pressure in the high pressure reservoir shall have adequate number of spare contacts to be used for continuous monitoring of low pressure, high pressure etc. Trip lockout shall be provided to prevent operations of the circuit breaker below the minimum specified hydraulic pressure. Alarm contacts for loss of Nitrogen shall be provided.

All hydraulic joints shall have no oil leakage under the site conditions and joints shall be tested at factory against oil leakage at a minimum of 1.5 times maximum working pressure.





4.06.08 **Pneumatically Operated Mechanism**



~~Each circuit breaker shall be provided with its own compressor, air receiver, necessary piping and valves, control equipment etc. to maintain the air pressure at the air receiver between operating limits.~~

~~Each air receiver shall be of sufficient capacity to allow one complete duty cycle of the breaker without running of compressor.~~

~~Each compressor shall have sufficient capacity to charge air receiver to the following service schedule:~~

- ~~i) From minimum operating pressure to maximum operating pressure within 5 minutes of operation.~~
- ~~ii) From atmospheric pressure to maximum operating pressure within 15 minutes of operation.~~
- ~~iii) Normal running air charging time for the compressor shall not exceed 15 minutes considering 10% leakage/day~~

~~The compressor shall be furnished complete with suction filter, after-cooler, drive motor, starter, controls and other accessories. All starters, switches, fuses and other accessories shall be housed in a pedestal mounted sheet steel control panel. The compressor motor shall be suitable for direct on line starting, both manually and automatically through pressure switch contacts. The pressure switch contacts shall be easily adjustable within reasonable limit. The compressor motor shall be capable of starting against any backpressure in receiver or pipelines.~~

~~Each receiver shall be provided with safety valve to protect the pneumatic system against abnormally high pressure and drain valve to drain any water or oil in the receiver.~~





~~The flow capacity of the safety valve connected to the air receiver shall be 20% higher than the total compressor capacity. The safety valve connected after the reducing valve shall have sufficient flow capacity so that the pressure on the secondary side can never exceed the highest permissible pressure even when the reducing valve becomes locked in fully open position for any reason. The reducing valves shall preferably be diaphragm type. Reducing valves, non-return valves, etc. must be of such type that more sensitive parts would not be exposed to accumulation of water or dust.~~

4.06.09 **Spring operated mechanism**

The mechanism shall have spring charging motor, opening and closing spring with limit switch for automatic charging and other necessary accessories to make the mechanism a complete operating unit.

The charging of closing spring for spring charged operating mechanism shall take place automatically after each breaker closing operation. One open close-open operation of the circuit breaker shall be possible after failure of power supply to the spring charging motor. It shall be provided with the facility of spring charging manually.





Provisions shall be made to prevent a closing operation of the breaker when the spring is in the partial charged condition. Mechanical interlocks shall be provided in the operating mechanism to prevent discharging of closing springs when the breaker is already in the closed position.

The spring operating mechanism shall have adequate energy stored in the operating spring to close and latch the circuit breaker against the rated making current and also to provide the required energy for the tripping mechanism in case the tripping energy is derived from the operating mechanism.

4.07.00 Control Cubicle

4.07.01 A common control cubicle shall be furnished to house electrical, controls, monitoring devices. The Control cubicle shall be mounted on the C.B system-supporting framework.

4.07.02 The cubicle shall be wired up to suitable terminal block for cable connection..

4.07.03 The cubicle shall have front access door with lock and removable gland plate at the bottom for Buyer's cable entry.

4.07.04 An active Mimic with the actual position indications and the integrated local controls of the circuit breaker, disconnect switches and earth switches shall be provided at the front.

4.07.05 LOCAL/REMOTE selector switches for circuit breaker disconnect switches and earthing switches, Operation counters and local alarms for faults/troubles shall be provided in the Control Cubicle.

4.07.06 Potential free contacts shall be provided in the cubicle for the following remote annunciations and indications as a minimum.


ALARMS

- a. SF₆ density low (for refilling)
- b. SF₆ density very low (alarm)
- c. SF₆ density very low (blocking)
- d. Circuit breaker Trip circuit unhealthy
- e. Pole discrepancy
- f. Loss of control voltage
- g. Oil/ Air pressure low
- h. Operating system failure

INDICATIONS


- a. Breaker positions
- b. Disconnect switch positions
- c. Earth switch positions
- d. Local/ Remote selector switch positions

4.07.07 Thermostat controlled space heater, internal illumination lamp and 3 pin 5A socket with individual ON-OFF switches shall be provided in the cubicle.





- 4.08.00 **Disconnecting switch and earthing switch (Integral with GCB)**
- 4.08.01 The off load disconnecting switch shall be installed downstream the CB, line side. It shall be air insulated, telescopic type, with sliding tubular contacts and hinged point on the line side.
- 4.08.02 Earthing switches shall be installed one on the generator side (upstream the CB) and the other on the line side (downstream the disconnecting switch).
- Earth switches shall be blade type with the fixed contact at the current path and with hinged point connected to earth.
- 4.08.03 Operating mechanism of the above switches shall be motorized. Electrical motors shall be suitable for 3 phase, 50HZ, 415 V \pm 10% A.C.
- A manual (mechanical) operating mechanism shall also be provided for maintenance and emergency purpose. Interlock shall be provided to prevent motor operation when the switch is being manually operated.
- 4.08.04 Electrical and mechanical interlocks shall be provided to avoid wrong operation of the disconnecting switches, earthing switches and circuit breaker.
- 4.08.05 The visual check of the position of the above switches shall be possible from outside the phase enclosure by means of inspection windows.
- 4.08.06 Each switch shall be provided with minimum 6 N.O. + 6 N.C spare auxiliary contacts.
- 4.09.00 **Short circuit devices**
- 4.09.01 The CB system shall be equipped with short circuit link (for relay testing).
- 4.09.02 The short circuit link shall be installed between the circuit breaker and the disconnecting switch in order to actuate the 3 phase unearthed short circuit on the generator terminals by closing the CB.
- 4.09.03 The short circuit link shall be manually mounted by removing the specific doors on the CB system phase enclosures.
- 4.10.00 ~~**Instrument Transformers**~~
- 4.10.01 ~~The current transformers shall be cast-resin, ring type, mounted within the Circuit Breaker phase enclosures and suitable for operation at an ambient temperature equal to rated bus-bar temperature.~~
- 4.10.02 ~~The C.T.s shall have polarity markings indelibly marked on them. C.T. secondary leads shall be brought out to separate terminal block mounted on the Control cubicle.~~
- 4.10.03 ~~The voltage transformer shall be three single phase cast-resin type, suitable for nominal operation connected from line to ground, and for 1.73 times rated line to ground voltage under sustained emergency condition.~~
- 4.10.04 ~~The high voltage winding of the voltage transformer shall be protected by current limiting fuse mounted on top of the primary bushing.~~

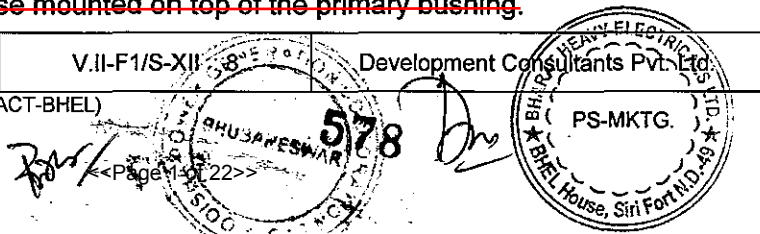



4.10.05 ~~The secondary leads from the voltage transformer shall be extended to a fuse / Miniature circuit breaker (MCB) and then to separate terminal block mounted on the Control cubicle. Facility for making the star points shall be kept at the Control cubicle.~~

4.11.00 **Surge Protection devices**

4.11.01 Lightning arrestor shall be station class, hermetically sealed type, fitted on the transformer side and shall be specifically suitable for generator protection.

The characteristic of the lightning arrestor shall be carefully chosen to provide a low protective ratio for generator BIL.

4.11.02 A discharge counter shall be provided for each lightning arrestor. The discharge counter register shall be provided in readily visible position.

4.11.03 The surge capacitor shall be non-inflammable and non-toxic type, single pole, fitted on both side of the breaker system

4.12.00 **Wiring**

4.12.01 Wiring shall be complete in all respects to ensure proper functioning of the control, protection, and monitoring and interlocking schemes.

4.12.02 DC circuit for trip coil 1 & 2 shall be wired separately so as to connect with duplicate DC supply.

4.12.03 Wiring shall be done with flexible 650V grade, PVC insulated, switchboard wires with 2.5 mm² stranded copper conductor. Wiring between individual poles and control cubicle shall be routed through G.I. / PVC rigid conduits.

4.12.04 Each wire shall identified at both ends with permanent markers bearing wire numbers as per Bidder's wiring diagram.

4.12.05 Wire termination shall be done with crimping type connectors with insulating sleeves. Wires shall not be spliced between terminals.



4.12.06 All spare contacts of relays, push buttons, auxiliary switches etc. shall be wired up to terminal blocks in the control cubicle.

4.13.00 **Terminal blocks**

4.13.01 Terminal blocks shall be 650V grade, enclosed clamp type with engraved numbers suitable for termination of at least two numbers of 2.5 mm² stranded copper conductor.

4.13.02 Not more than two wires shall be connected to any terminal. Spare terminals equal in number to 20% active terminals shall be furnished.

4.13.03 Terminal blocks shall be located to allow easy access. Wiring shall be so arranged that individual wires of an external cable can be connected to consecutive terminals.





4.14.00 Sulphur Hexafluoride (SF₆) Gas

4.14.01 The SF₆ gas shall be new and comply with relevant IEC/IS(Refer Annexure-D, Section-I, Volume- II F1) and shall be suitable in all respects for use in the circuit breakers under the various operating conditions.

4.14.02 SF₆ gas shall be tested for quality, dew point, air, hydrolysable fluorides and water content as per IEC quoted above and test certificates shall be furnished covering all tests for each lot of SF₆ gas.

4.14.03 The use, handling & storage of SF₆ gas shall comply with requirements of relevant IEC/IS (Refer Annexure-D, Section-I, Volume-II F1).

4.15.00 Auxiliary Equipment

4.15.01 A Portable SF₆ gas filling and evacuating system shall be supplied with necessary gas valves, safety devices, gas purity monitoring devices, regulators, vacuum pump, pressure gauges/switches, hose pipes etc.

4.15.02 The sensing probe of SF₆ gas leaked detector shall be able to reach all the points on the breaker where leakage is to be sensed. The accuracy of the equipment shall be at least 10 ppm. It shall be free from induced voltage effect.

4.15.03 An Operational Analyzer shall be supplied to record contact travel, speed and for making measurement of operating timings, synchronization of contacts in one pole or all poles.

4.16.00 Name Plate

4.16.01 Each circuit breaker and its operating devices and accessories shall be provided with name plate clearly marked the particulars in accordance with IEEE Std. C37.013 -1997

4.16.02 Instruction and Warning signs shall be provided in accordance with IEEE Std. C37.013 -1997

4.16.03 The name plate shall be provided in visible portion of normal service and installation.



5.00.00 TESTS

5.01.00 Routine Test

During manufacture and on completion, Generator circuit breaker shall be subjected to the routine tests (Production tests) as laid down in IEEE Standard C37.013-1997 at manufacturer's works. The disconnecting switches, earthing switches, surge arrester and surge capacitors shall be subjected to routine tests as laid down in relevant IS/IEC standard.

5.02.00 Type Tests

The Generator circuit breaker **type test reports, may or may not be older than 5 years shall be furnished for type tested tests** (design tests) as per IEEE Standard C37.013-1997 **and as per manufacturers' quality inspection programs. The validity period is not applicable to**

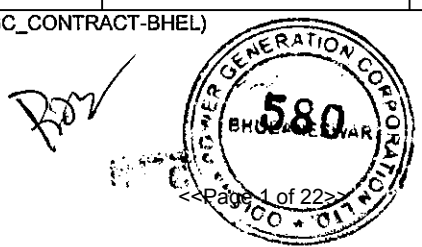



~~interrupting chamber as there is no change in design since the last type test was carried out. Further associated components such as disconnecting switches, earthing switches, surge arrester and surge capacitors shall be type tested as per relevant IEC standards.~~

5.03.00 Test Witness

Routine Tests shall be performed in presence of Buyer's representative if so desired by the Buyer. The Bidder shall give at least seven (7) days' advance notice of the date when the tests are to be carried out.

5.04.00 Test Certificates

5.04.01 Certified reports of all the tests carried out at the works shall be furnished in required number copies for acceptance of the Buyer.

5.04.02 The equipment shall be dispatched from works only after receipt of Buyer's written acceptance of the test reports.

5.04.03 Routine test certificates of bought out components shall be furnished

5.04.04 Type test certificate on any equipment or component if so desired by the Buyer shall be furnished. Otherwise the equipment shall have to be type tested, free of charge, to prove the design.

6.00.00 SPECIAL TOOLS & TACKLES

6.01.00 A set of special tools & tackle which are necessary or convenient for erection, commissioning, maintenance and overhauling of the equipment shall be supplied.

6.02.00 The tools shall be shipped in separate containers, clearly marked with the name of the equipment for which they are intended.

7.00.00 SPARES

7.01.00 The Bidder shall submit a list of recommended spare parts for three (3) years satisfactory and trouble-free operation, indicating the itemized price of each item of the spares. The final quantity shall be decided during placement of order.

7.02.00 The Bidder shall quote and supply mandatory spare parts as per V.IIA. The final quantity shall be decided during placement of order.

7.03.00 Each list shall be complete with specification, make, identification number, unit rate, quantity etc.

8.00.00 DRAWINGS, DATA & MANUALS

8.01.00 Drawings, Data and Manuals shall be submitted as specified in Commercial Contract and in this section



8.02.00 To be submitted with the Bid

8.02.01 Typical general arrangement drawings of the equipment.

Doc. No. K8B09-MP-SPC-G-001	V.II-F1/S-XII : 11	Development Consultants Pvt. Ltd.
-----------------------------	--------------------	-----------------------------------

(K8B09-MP-V-II-F1-ELE12_OPGC_CONTRACT-BHEL)

581







- 8.02.02 Guaranteed technical data, leaflets on equipment and special tools explaining construction features, principle of operation, special features etc.
- 8.02.03 Type test certificate of the offered model of the circuit breaker for the specified type tests.
- 8.03.00 **To be submitted after award of contract.**
- 8.03.01 Guaranteed Technical Particulars & Quality assurance plan.
- 8.03.02 Dimensional general arrangement drawing showing disposition of various fittings.
- 8.03.03 Foundation plan and loading.
- 8.03.04 Assembly drawing for erection at site with part numbers and schedule of materials Transport/shipping dimensions with weights.
- 8.03.05 Control schematic and wiring diagrams.
- 8.03.06 Symmetrical and asymmetrical short circuit current calculation for three phase fault at generator terminals, according to IEEE Std. C37.013, on the basis of the generator and system data provided in annexure.
- 8.03.07 Out of phase current calculation for 90° out of phase condition, according to IEEE Std. C37.013, on the basis of the generator and system data provided in annexure.
- 8.03.08 Any other relevant drawing or data necessary for satisfactory installation, operation and maintenance.
- 8.03.09 Instruction manuals on circuit breakers and its accessories.
The manual shall clearly indicate method of installation, check ups and tests to be carried out before commissioning of the equipment.
- 8.04.00 The Bidder may note that the drawings, data and manuals listed herein are minimum requirement only. The Bidder shall ensure that all other necessary write-up, curves, etc require to fully describe the equipment are to be submitted with the bid.

Roz

Dr



582




ANNEXURE-A

RATINGS & REQUIREMENTS

A. GENERATOR CIRCUIT BREAKER ASSEMBLY

1.0	Type	:	Enclosed
2.0	Service	:	Indoor / Outdoor
3.0	Pole	:	3
4.0	Mounting	:	Horizontal
5.0	Location	:	In between Generator & Generator Transformer, connected to generator isolated phase bus duct system at both ends.
6.0	Enclosure	:	
6.1	Construction	:	3 single phase enclosures assembled on common frame with control cubicle
6.2	Material	:	Alluminium alloy
6.3	Degree of Protection	:	IP-52/ IP-55
6.4	Phase spacing	:	
	Minimum	:	Later
	Maximum	:	Later
7.0	Additional components	:	
7.1	Line Disconnect Switch	:	Yes
7.2	Earthing switch – GT side	:	Yes
7.3	Earthing switch – Generator side	:	Yes
7.4	Starting Switch	:	No
7.5	Voltage Transformer – GT side	:	No
7.6	Voltage Transformer – Generator side	:	No
7.7	Current Transformer – GT side	:	No
7.8	Current Transformer – Generator side	:	Yes
7.9	Lightning Arrester – GT side	:	No
7.10	Surge Arrester – Generator side	:	No






ANNEXURE-A


7.10	Surge Capacitor – GT side	:	No (For limiting TRV)
7.11	Surge Capacitor – Generator side	:	No (For limiting TRV)
7.12	Manual short circuiting connection	:	No/Yes (Optional, project specific)
7.13	Motorised short circuiting switch	:	No/Yes (Optional, project specific)
8.0	Cooling	:	Natural air cooled
9.0	Rated Voltage kV rms	:	21*
10.0	Rated Frequency Hz	:	50 ± 3 to -5%
11.0	Rated continuous current Amp	:	24,000 23595 A
12.0	Reference Standard	:	IEEE Std.C37.013--IEC-60529,61166


B. GENERATOR CIRCUIT BREAKER

1.0	Type	:	SF ₆
2.0	Operating Mechanism	:	Hydraulic / Pneumatic / Spring operated, Stored energy, Gang operated
3.0	No. of poles	:	Three
4.0	Rated Maximum Voltage KV rms	:	24*
5.0	Rated Frequency Hz	:	50 +3 to -5%
6.0	Rated continuous current at site condition Amps	:	<u>24000A Corresponding to Valve wide open output of generator *</u> 23595 A
7.0	No. of operation / year	:	
8.0	Reference Standard	:	IEEE Std.C37.013--IEC-60694
9.0	Rated Insulation Level	:	
9.1	Full wave Impulse withstand voltage (1.2 x 50µs wave)KV peak	:	150
9.2	Rated one minute power frequency withstand voltage (dry)KV rms	:	60
10.0	Rated operating duty cycle Short –circuit currents	:	CO – 30 min – CO
11.0	Rated interrupting time ms	:	60 – 90



584





	Orissa Power Generation Corporation Ltd.	Technical Specification for Main Plant Package	IB TPS – 2 X 660 MW Units 3&4, Jharsuguda, Orissa
---	--	--	---

ANNEXURE-A

12.0	Rated Making & Breaking Capacity		
12.1	Rated Short-circuit breaking current (Symmetrical)	KA rms	: 160* 145
12.2	Rated short-circuit making current	KA peak	: 2.74 x Breaking capacity(r.m.s)
12.3	Rated peak withstand current	KA peak	: As per IEEE Std. C37.013
12.4	Rated short time withstand current for rated duration of 1sec.	KA rms	: As per IEEE Std. C37.013
12.5	Transient Recovery Voltage (TRV) rating		: As per IEEE Std. C37.013
12.6	Rated load current switching capability		: As per IEEE Std. C37.013
12.7	Rated Out of phase breaking current In % of rated Short Ckt. Breaking current		: As per IEEE Std. C37.013
12.8	Rated Out of phase making current In % of rated Short Ckt. Breaking current		: As per IEEE Std. C37.013
13.0	First pole to clear factor		: 1.5
14.0	Amplitude factor		: 1.5
15.0	Rated load current interruption duty		: As per IEEE Std. C37.013
16.0	Temperature rise		
16.1	Design ambient temperature	°C	: Refer Volume V.IIA
16.2	Allowable temperature limits		: As per IEEE Std. C37.013
17.0	Number of trip coils		: Two
18.0	Rated Supply Voltage and frequency for		
18.1	Closing		: 220 V D.C
18.2	Tripping		: 220 V D.C.
18.3	Compressor / Pump Motor		: 415V, 3 Ph, 3W, 50Hz
18.4	Heater/Lamp/Socket		: 240V, 1 Ph, 2W
19.0	Seismic Acceleration		: 0.5 g (horizontal)
20.0	SF ₆ Gas		: As Per IEC60376 & 61634

Note : Bidder shall determine the Generator Circuit Breaker ratings according to IEEE Std.C37.013, based on the Generator and System parameters furnished in the Annexure – A. GCB ratings indicated above represent the minimum requirement only.

Doc. No. K8B09-MP-SPC-G-001	V.II-F1/S-XII/A : 15	Development Consultants Pvt. Ltd.
(K8B09-MP-V-II-F1-ELE12_OPGC_CONTRACT-BHEL)		



ANNEXURE-A



C. DISCONNECTING SWITCH / EARTH SWITCH

1.0	Type	:	Air break
2.0	Operating Mechanism	:	A.C. Motor Operated as well as Manual
3.0	No. of poles	:	Three
4.0	Rated Maximum Voltage KV rms	:	----
5.0	Rated Frequency	Hz :	50 +3 to -5%
6.0	Rated continuous current at site condition	for DS Amps :	24,000* 23595
7.0	Short time current for 1secs	KA rms :	160* 145
8.0	Peak Withstand current	KA peak	
9.0	Reference Standard	:	IEC-62271-102
10.0	Rated Insulation Level		
10.1	Rated Lightning Impulse Withstand Voltage (KV peak)		
	a. Across isolating distance	:	By Bidder
	b. To Earth & Between Poles	:	By Bidder
10.2	One Minute Power Frequency Withstand Voltage (KV rms)		
	a. Across isolating distance	:	By Bidder
	b. To Earth & Between Poles	:	By Bidder

~~D. CURRENT TRANSFORMER~~

1.0	Type	:	Cast resin, ring type.
2.0	Service	:	Indoor / Outdoor.
3.0	Mounting	:	Inside phase enclosure.
4.0	Insulation class	:	24*

NOTE : Data marked with * are indicative only, Bidder to decide the actual values by calculation .





Orissa Power Generation Corporation Ltd.

Technical Specification for Main Plant Package

IB TPS – 2 X 660 MW Units 3&4, Jharsuguda, Orissa

ANNEXURE-A

C.T. Type	Description	Current Ratio A/A	Output VA	Class	ISF	Knee Point Voltage V _k Volt *	Excitation Current mA **	Secondary Resistance Ohm +
-----------	-------------	----------------------	--------------	-------	-----	---	-----------------------------	-------------------------------

Generator Side

- A. Core-1
- B. Core-2
- C. Core-3
- D. Core-4

Generator Transformer Side


- A. Core-1
- B. Core-2
- C. Core-3
- D. Core-4



NOTE : The ratings indicated are tentative. The exact requirement shall have to be coordinated on finalization of protection scheme.

- * Not less than
- ** Nor more than
- + At maximum operating temperature.

Handwritten signatures



Doc. No. K8B09-MP-SPC-G-001	V.II-F1/S-XII/Annx-A : 17	Development Consultants Pvt. Ltd.
-----------------------------	---------------------------	-----------------------------------

(K8B09-MP-V-II-F1-ELE12_OPGC_CONTRACT-BHEL)

587



ANNEXURE-B

FITTINGS & ACCESSORIES

The following fittings and accessories shall be provided.

1.0 Generator Circuit Breaker

- a) Mechanical position indicator marked 'ON' and 'OFF' visible externally to the operating mechanism.
- b) Manual mechanical trip, three-pole.
- c) Operations counter, one per pole
- d) Device for manual slow closing and opening during maintenance
- e) Anti-pumping and trip-free mechanism
- f) SF₆ gas density monitoring system (for SF₆ interrupter)
- g) Hydraulic/ Pneumatic/ Spring operated mechanism
- h) Control cabinet

2.0 Disconnecting Switch

- a) Motorized drive
- b) Mechanical position indicator marked 'ON' and 'OFF' visible externally to the operating mechanism.
- c) Emergency manual operation-hand crank
- d) Key interlocking in closed and open position
- e) Operating mechanism & Control


3.0 Earthing Switch

- a) Motorized drive
- b) Mechanical position indicator marked 'ON' and 'OFF' visible externally to the operating mechanism.
- c) Key interlocking in closed and open positions
- d) Operating mechanism & Control

4.0 ~~Current & Voltage Transformers~~

5.0 ~~Lightning arresters~~

6.0 Surge capacitors

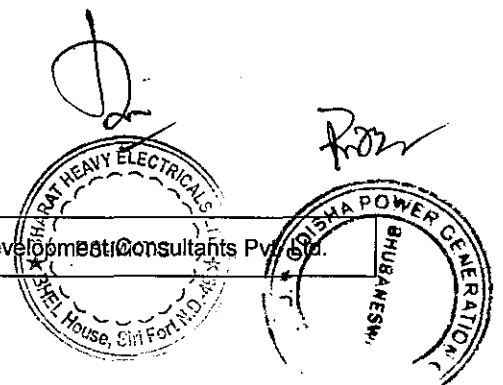



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0

DATE: 30.07.14

SHEET

21 OF 22

6.0 DOCUMENTS REQUIRED ALONG WITH TECHNICAL OFFER

Bidder shall submit following documents along with technical offer:

- a] Filled in Data Sheet -B.
- b] Technical leaflet/ catalogue.
- c] Correction curves/ tables to arrive at current rating of GCB and series isolator at various ambient temperatures.
- d] General Arrangement drawing of GCB showing various dimensions, space required for operation and maintenance, weight etc.
- e] Summary of Type tests certificates indicating key test results, clause & standard reference, date and place of testing (As per IEEE)
- f] Write up on operating mechanism of GCB.
- g] Schedule of deviations
- h] Schedule of BOQ-Cum-Price Schedule (Unpriced)
- i] Schedule of start-up and commissioning spares (Unpriced)
- j] Schedule of O/M spares (Recommended) for 3 years of plant operation. (Unpriced)
- j] Schedule of special tools and tackles (Unpriced)
- k] Reference list.



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0

DATE: 30.07.14

SHEET

21 OF 22

7.0 DOCUMENTS REQUIRED AFTER THE AWARD OF LOI

7.1 Bidder shall submit following documents after the award of LOI for approval and distribution:

- a] Filled in data sheet – C(Combination of Datasheet-A and Datasheet-B) .
- b] Detailed general arrangement drawing of GCB showing various dimensions, space required for operation and maintenance, weights etc. (GA drawing to be complete for GCB and auxiliaries.)
- c] Foundation arrangement drawing showing loading, forces at various points etc.
- d] General arrangement drawing of local control panel.
- e] Logic for closing/tripping of GCB, isolator and earth-switch.
- f] Electrical control scheme of local control panel.
- g] Drawings for operating mechanism.
- h] P & I Diagram.
- i] Complete Type tests certificates (as per IEEE)
- j] Manufacturing Quality Plan.
- k] Field quality plan for equipment storage, handling, erection, testing and commissioning at site, recommended by vendor.
- l] O & M Manual.
- m] Routine test certificates.
- n] Design calculations for support structure
- o] Detailed calculations for short circuit capability for system side/ generator side fault contribution.

7.2 All drawings, documents shall be in English.

7.3 The vendor after LOI shall submit drawings/documents in requisite number of copies as indicated in ATTACHMENT-III (“DOCUMENTS / DRAWINGS DISTRIBUTION SCHEDULE”).

**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

2X660 MW BANHARPALLI, OPGCL

REVISION 0

DATE: 30.07.2014

SHEET

1 OF 3

DATA SHEET-A

SL.NO.	PARAMETER	UNIT	VALUE/REQUIREMENTS
1.01	QUANTITY OF GCB	Nos.	2
1.02	METHOD OF COOLING		NATURAL/FORCED COOLING
1.03	IF FORCED COOLING, 100% REDUNDANT EQUIPMENT REQUIRED	YES/NO	YES
1.04	CONFIGURATION OF EARTH SWITCH, SERIES DISCONNECTOR, SURGE CAPACITOR, SURGE ARRESTOR & MANUAL SHORT CIRCUITING CONNECTION WITH EARTHING LINK		AS PER ATTACHMENT - I
1.05	DEGREE OF PROTECTION OF GCB ENCLOSURE AND LOCAL CONTROL PANEL		IP52
1.06	INTERFACE WITH IPBD		ENCLOSURE THROUGH FLANGES AND BUSBAR THROUGH FLEXIBLE CONNECTIONS
1.07	CONTINUOUS CURRENT AT 50 °C	A	23595
1.08	RATED VOLATGE	kV	TO SUIT GENERATOR TERMINAL VOLTAGE
1.09	MAX. RATED VOLTAGE	kV	24
1.10	RATED FREQUENCY	Hz	50
1.11	AUXILIARY VOLTAGE		220V DC, 415V 3-PH, 4-WIRE AC 50Hz
1.12	NO. OF POLES	NOS.	3
1.13	RATED SHORT TIME WITHSTANDS CURRENT	kA	145 [FOR 1 SEC.]
1.14	INTERRUPTING CAPACITY AT RATED VOLTAGE AND OPERATING DUTY		
1.15	A) SYMMETRICAL	kA(RMS)	145
1.16	B) ASYMMETRICAL	kA(PEAK)	AS PER IEEE
1.17	INTERRUPTING TIME (TRIPPING COMMAND TILL ARC EXTINCTION)	ms	60-90 MILLISECOND
1.18	OPENING TIME (TRIPPING COMMAND TILL CONTACT SEPARATION)	ms	AS PER IEEE
1.19	TRANSIENT RECOVERY VOLTAGE (FOR GENERATOR SOURCE FAULTS)		AS PER IEEE
1.20	TRANSIENT RECOVERY VOLTAGE (FOR SYSTEM SOURCE FAULTS)		AS PER IEEE
1.21	OPERATING MECHANISM FOR GCB		HYDRAULIC/SPRING OPERATED
1.22	RATED DUTY CYCLE		CO-30 MIN-CO
1.23	ONE MINUTE POWER FREQUENCY WITHSTAND VOLTAGE TO EARTH & ACROSS CIRCUIT BREAKER/ SWITCH CONTACTS	kV(RMS)	60
1.24	LIGHTNING IMPULSE WITHSTAND VOLTAGE TO EARTH & ACROSS CIRCUIT BREAKER/SWITCH CONTACTS	kV(PEAK)	150

**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

2X660 MW BANHARPALLI, OPGCL

REVISION 0

DATE: 30.07.2014

SHEET

2 OF 3

SL.NO.	PARAMETER	UNIT	VALUE/REQUIREMENTS
1.25	ONE MINUTE POWER FREQUENCY WITHSTAND VOLTAGE FOR AUXILIARY AND CONTROL CIRCUITS	kV(RMS)	2
1.26	MAX. AMBIENT TEMP.	°C	50
1.27	MAX. TEMP. OF BUSBAR CONNECTIONS CONSIDERING SILVER PLATED JOINTS	°C	105
1.28	MAX. TEMP. OF ENCLOSURE CONNECTIONS	°C	AS PER IEEE
1.29	RATED SHORT TIME WITHSTANDS CAPABILITY FOR CIRCUIT BREAKER, DISCONNECTOR AND EARTH SWITCH		FOR 1 SEC.
1.30	OPERATING MECHANISM FOR DISCONNECTOR AND EARTH SWITCH		ELECTRICAL MOTOR OPERATED
2.01	GENERATOR DETAILS		
A.	RATED VOLTAGE	kV	21
B.	VOLTAGE VARIATION	±%	5
C.	PEAK MW RATING AT 50 DEG C AMBIENT	MW	660
D.	RATED POWER FACTOR		0.85
E.	FREQUENCY	Hz	50
F.	GENERATOR REACTANCES AND TIME CONSTANTS		AS PER ATTACHMENT - II
G.	GENERATOR NEUTRAL EARTHING		HIGH RESISTANCE (THROUGH TRANSFORMER LOADED WITH RESISTANCE ON SECONDARY)
H.	GEN. STATOR WINDING BASIC INSULATION LEVEL	kV(PEAK)	89
3.01	GENERATOR BUSDUCT DETAILS		
A.	TYPE		ISOLATED PHASE BUS-DUCT
B.	MAXIMUM CONTINUOUS CURRENT AT 50 °C	A	24000
C.	ONE MINUTE POWER FREQUENCY WITHSTAND VOLTAGE	kV(RMS)	60
D.	IMPULSE WITHSTAND VOLTAGE	kV(PEAK)	125
E.	OVERALL DIAMETER OF ENCLOSURE (INSIDE)	MM	1700 (TENTATIVE)
F.	THICKNESS OF ENCLOSURE	MM	9
G.	PHASE-PHASE SPACING	MM	2100 (TENTATIVE)
H.	ENCLOSURE MATERIAL		AL. ALLOY
I.	CONDUCTOR MATERIAL		AL. ALLOY
J.	CONDUCTOR PROFILE		ROUND
K.	COOLING		NATURAL



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

2X660 MW BANHARPALLI, OPGCL

REVISION 0

DATE: 30.07.2014

SHEET

3 OF 3

SL.NO.	PARAMETER	UNIT	VALUE/REQUIREMENTS
L.	PRESSURIZATION SYSTEM PROVIDED	YES/NO	YES (HOT AIR BLOWING EQUIPMENT ALSO FOR IR MAINTENANCE IS PROVIDED)
M.	PRESSURE OF AIR INSIDE THE ENCLOSURE	Pa	500-2500
N.	MAXIMUM TEMPERATURE OF CONDUCTOR AT 50°C	°C	90
O.	MAXIMUM TEMPERATURE OF ENCLOSURE AT 50°C	°C	70
P.	MAXIMUM TEMPERATURE OF SILVER PLATED CONDUCTOR JOINTS AT 50°C	°C	105
4.01	TYPE TESTS		
A.	VALIDITY PERIOD OF TYPE TEST REPORTS		MAY OR MAY NOT BE 5 YEARS OLD.
B.	TYPE TESTS TO BE CONDUCTED FOR THIS CONTRACT, DESPITE AVAILABILITY OF VALID & ACCEPTABLE TEST CERTIFICATES	YES/ NO	NO
C.	IF YES, LIST OF TYPE TESTS TO BE CONDUCTED		NA
5.01	MANDATORY SPARES		
A.	MANDATORY SPARES TO BE QUOTED FOR THIS CONTRACT	YES/ NO	YES
B.	IF YES, LIST OF MANDATORY SPARES		AS PER BOQ-CUM-PRICE SCHEDULE



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

2X660 MW BANHARPALLI , OPGCL

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C


REVISION 0

DATE: 30.07.2014

SHEET

1 OF 1

ATTACHMENT – I

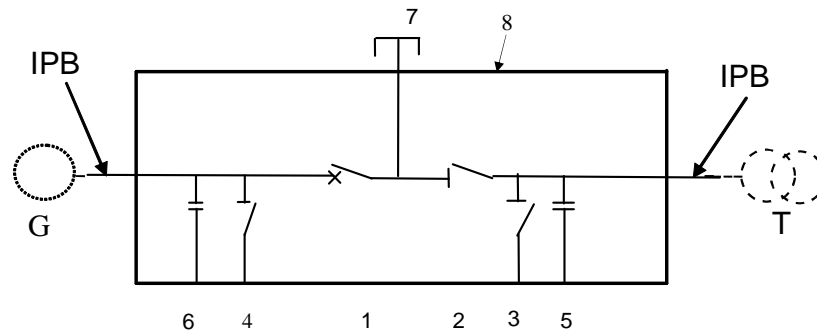

- | | | | |
|------|-------------------|------|--------------------------------------|
| 1 | Circuit-breaker | 7 | Manual Short-circuiting connection |
| 2 | Isolator | 5, 6 | Surge capacitors (as per applicable) |
| 3, 4 | Earthing switches | 8 | System enclosure |

SINGLE LINE CONFIGURATION OF GENERATOR CIRCUIT BREAKER



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

**2 X 660 MW (UNIT #3 & 4) IB THERMAL
POWER STATION, BANHARPALI**

REVISION 0

DATE: 30.07.14

SHEET

1 OF 1

ATTACHMENT – II

SL. NO.	DESCRIPTION	UNIT	VALUE
1	RATED POWER	MVA	776
2	RATED FREQUENCY	Hz	50
3	RATED VOLTAGE	KV	21
4	MINIMUM / MAXIMUM GENERATION VOLTAGE	%	+/-5
5	RATED POWER FACTOR		0.85
6	REACTANCE VALUE (SATURATED):		
	SYNCHRONOUS REACTANCE, DIRECT AXIS	pu	0.244 (Unsaturated)
	TRANSIENT REACTANCE, DIRECT AXIS	pu	0.302
	SUB TRANSIENT REACTANCE, DIRECT AXIS	pu	0.202
	SYNCHRONOUS REACTANCE, QUADRATURE AXIS	pu	2.31(Unsaturated)
	TRANSIENT REACTANCE, QUADRATURE AXIS	pu	0.86 (Unsaturated)
	SUB TRANSIENT REACTANCE, QUADRATURE AXIS	pu	0.222
	ZERO SEQUENCE REACTANCE	pu	0.106(Unsaturated)
7	TIME CONSTANTS (SHORT CIRCUIT TIME CONSTANTS):		
	TRANSIENT TIME CONSTANT, DIRECT AXIS	s	0.855
	SUB TRANSIENT TIME CONSTANT, DIRECT AXIS	s	0.0291
	TRANSIENT TIME CONSTANT, QUADRATURE AXIS	s	0.836
	SUB TRANSIENT TIME CONSTANT, QUADRATURE AXIS	s	0.07
	ARMATURE TIME CONSTANT	s	0.326
8	SPEED	rpm	3000



**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

2X660 MW BANHARPALLI , OPGCL

SPECIFICATION NO. PE-TS-391-510-E001

VOLUME II B

SECTION C

REVISION 0

DATE: 14.07.2014

SHEET

1 OF 1

ATTACHMENT – III

No. of prints to be submitted by vendor after award of contract shall be as under:

S.N.	Drawings and documents	Soft and Hard Prints
1.0	<u>DRAWING FOR APPROVAL</u>	
1.1	For approval	Soft+2 Hard Print
1.2	For customer approval	Soft+2 Hard Print
1.3	For final distribution	Soft+2 CD +5 Hard Print
2.0	<u>DRAWING FOR REFERENCE</u>	
2.1	For reference	Soft+2 Hard Print
2.2	For final distribution	Soft+2 CD+5 Hard Print
3.0	<u>CERTIFICATE, REPORTS ETC.</u>	Soft+2 Hard Print
4.0	<u>AS BUILT DRAWINGS (IF REQUIRED)</u>	Soft+2 CD+8 Hard Print
5.0	<u>O&M MANUAL</u>	
5.1	Draft for approval	Soft +3 CD+ 5 Hard Print
5.2	For final distribution	Soft +3 CD + 8 Hard Print
6.0	<u>QUALITY PLAN / Field quality plan / PG test</u>	Soft + 2 Hard Print

**2 X 660 MW (UNIT #3 & 4) IB THERMAL POWER STATION, BANHARPALI
BOQ-CUM-PRICE SCHEDULE OF GENERATOR CIRCUIT BREAKER**

SL. NO.	ITEM CODE	MAIN ITEM DESCRIPTION	UNIT	QTY.	UNIT PRICE	TOTAL PRICE	REMARKS
1.0	510-11003-A	GENERATOR CIRCUIT BREAKER INCLUDING ISOLATOR, SERIES CONNECTOR, EARTH-SWITCH, MANUAL SHORT CIRCUITING FACILITY WITH GROUNDING LINK, SURGE CAPACITOR AND CONTROL PANEL A/W ITEMS AT SL. 1.0 (a) 1.0 (b) 1.0 (c)	SET	2			
1.0 (a)		PORTABLE SF ₆ GAS FILLING AND EVACUATING SYSTEM.	SET	1			
1.0 (b)		SF ₆ GAS LEAKAGE DETECTOR	SET	2			
1.0 (c)		CIRCUIT BREAKER OPERATION ANALYSER	SET	1			
2.0	510-11007-A	START-UP AND COMMISSIONING SPARES	LOT	1			BIDDER TO FURNISH THE LIST
3.0	510-11008-A	SUPERVISION OF ERECTION, TESTING AND COMMISSIONING					
3.0(a)		CHARGES PER VISIT	VISIT	2			REFER NOTE-1 & 2
3.0(b)		MANDAYS CHARGES	DAYS	8			REFER NOTE-1 & 2
4.0	510-11011-A	SPECIAL TOOLS AND TACKLES	LOT	1			BIDDER TO FURNISH THE LIST
5.0	510-11000-B	MANDATORY SPARES	LOT	1			REFER ANNEXURE-1 FOR DETAILED LIST
OPTIONAL ITEM							
1.0	510-11006-A	OPERATION & MAINTENANCE SPARES (RECOMMENDED) FOR 3 YEAR OF PLANT OPERATION	LOT	1			BIDDER TO FURNISH THE LIST.

NOTES


- 1 FOR EACH GCB 1(ONE) VISIT AND 4(FOUR) MANDAYS TO BE CONSIDERED. THE PRICES SHALL BE INCLUSIVE OF CHARGES OF AIRFARE, BOARDING/LODGING, VISA, MEDICAL, INSURANCE ETC.
- 2 AMOUNT PAYABLE PER VISIT = VISIT CHARGES AS PER SL. NO. 3.0(a) ABOVE (+) MANDAYS CHARGES AS PER SL. NO. 3.0(b) ABOVE (x) NO. OF DAYS AT SITE (TO BE CERTIFIED BY BHEL SITE)
- 3 WHEREEVER SET IS INDICATED ABOVE, IT MEANS THE TOTAL PARTS/ACCESSORIES REQUIRED TO REPLACE THE PARTICULAR ITEM FOR A GIVEN EQUIPMENT.

**2 X 660 MW (UNIT #3 & 4) IB THERMAL POWER STATION, BANHARPALI
MANDATORY SPARES LIST (ANNEXURE-1)**

SL. NO.	ITEM CODE	ITEM DESCRIPTION	UNIT	QTY. FOR EACH UNIT	TOTAL QTY. FOR TWO UNITS	UNIT PRICE	TOTAL PRICE	REMARKS
5.0	510-11000-B	MANDATORY SPARES						
1.0		Support insulator of each type	% OF TOTAL QTY	10	20			
2.0		Circuit Breaker closing coil	NOS.	1	2			
3.0		Circuit Breaker trip coil	NOS.	1	2			
4.0		Breaker fixed contact (main & arcing)	SETS	1	2			
5.0		Breaker moving contact (main & arcing)	SETS	1	2			
6.0		SF6 Bottle	NOS.	3	6			
7.0		Gas filling unit (for SF6 breaker)	NOS.	1	2			
10.0		Disconnecting switch, earth switch, Start switch complete with operating mechanism (1 phase unit)	NOS.	1	2			
11.0		Lightning arrester (1 phase unit)	NOS.	1	2			If applicable
12.0		Surge capacitor (1 phase unit)	NOS.	1	2			If applicable
13.0		Circuit Breaker complete operating	SETS	1	2			
14.0		Isolating switch, Selector switch, breaker control switch, position indicators, Contactor/ Relays, Push button ,Timer etc.	% OF TOTAL QTY	10	20			
15.0		Power and Control fuses / CIRCUIT BREAKERs of different ratings	% OF TOTAL QTY	10	20			
16.0		Indicating lamp	% OF TOTAL QTY	10	20			
17.0		Auxiliary Switch assembly	SETS	1	2			

NOTES


- WHEREEVER SET IS INDICATED ABOVE, IT MEANS THE TOTAL PARTS/ACCESSORIES REQUIRED TO REPLACE THE PARTICULAR ITEM FOR A GIVEN EQUIPMENT.

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. : 0	Date: 30.07.14
		Page : 1 of 8	


DATA SHEET –B

**TECHNICAL PARTICULARS
[TO BE SUBMITTED ALOGWITH TECHNICAL OFFER]**


SL.NO.		SPECIFIED	OFFERED
GENERATOR CIRCUIT BREAKER			
1.01	a. Manufacturer		
	b. Country of Manufacture		
	c. Type Designation		
1.02	Applicable Standard	ANSI/IEEE (C37.013)	
1.03	Rated voltage (kV)		
1.04	Rated frequency	50Hz	
1.05	Rated continuous current (A) at ambient temperature of: 40°C 50°C		
1.06	Interrupting medium	SF6	
1.07	Breaking capability		
i)	System source fault		
	a) Rated symmetrical breaking current (kA rms)		
	b) Rated asymmetrical breaking current (kA rms)		
	c) DC component		
ii)	Generator source fault		
	a) Rated symmetrical breaking current (kA rms)		
	b) Rated asymmetrical breaking current		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001		
		Volume	Section	
	IIB		Rev. : 0	Date: 14.07.14
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Page : 2 of 8	


	(kA rms)		
	c) DC component		
	d) Suitability of GCB checked with Generator data.	Yes/ No	
1.08	Rated making current (kA _{peak})		
1.09	Rated duty cycle	CO -30 - CO	
1.10	Rated impulse withstand voltage (kV _{peak})		
1.11	Rated Power frequency `dry test' withstand voltage: Earth (kV _{rms}): Across the pole (kV _{rms}):		
1.12	Type of cooling	Natural	
1.13	Maximum allowable temperature of main contacts (Deg. C)	105/90	
1.14	Degree of protection of breaker enclosure	Air leakage < 2%	
1.15	Whether canopy is required, if GCB is installed outdoor		
1.16	Voltage rating of motor driven pumps (in hydraulic mechanism)		
1.17	No. and KW rating of motor driven pumps		
1.18	Does GCB has provision of lockout features for open and close conditions of GCB?		
1.19	Stored energy of GCB is suitable for how many CO operations?		
1.20	Maximum current (A) under natural cooled conditions which can be carried by GCB at following ambient temperatures:		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001		
		Volume	Section	
	IIB			
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Rev. : 0	Date: 14.07.14
		Page : 3 of 8		


	--°C		
	--°C		
	--°C		
	--°C		
	50°C		
1.21	Nominal Ratings of the basic model quoted: Normal current (A): Normal voltage (kV): Fault current (kA): Making current (kA _{peak}): Dielectric withstand voltage (kV _{rms} , kV _{peak}):		
1.22	Circuit breaker closing time (msec)		
1.23	Circuit breaker break time (msec)		
1.24	Whether specified safety interlocks and locking features provided as per the specification?		
1.25	Type of operating mechanism provided		
1.26	No. of poles: Whether three poles of the circuit breaker are gang operated?		
1.27	Whether circuit breaker has anti pumping feature?		
1.28	Whether circuit breaker has trip free mechanism?		
1.29	Whether lockout feature provided for the circuit breaker?		
1.30	Whether separate SF6 gas monitors		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001		
		Volume	Section	
	IIB		Rev. : 0	Date: 14.07.14
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Page : 4 of 8	


	provided for each of the three phases of the circuit breaker?		
1.31	No. of SF6 gas monitors provided for each GCB		
1.32	a) No. of trip coils provided b) Voltage rating of trip coil c) Minimum operating voltage of trip coil		
1.33	Emergency current rating during loss of coolant (if applicable)		
1.34	Time available at rated current before load reduction		
1.35	Rate at which load current should be reduced		
1.36	Reduced continuous operating current		
1.37	Rated voltage range factor K		
1.38	Rated short circuit duty cycle		
1.39	Rated permissible tripping time		
1.40	Maximum permissible temperature rise of main contacts and conducting joints for continuous rating over the ambient air temperature of 50 deg C: Copper: Silver: Silver alloy:		
1.41	Minimum creepage distance		
1.42	Clearance in air of live parts - phase to earth		
1.43	a) Control circuit suitable for aux. supply voltage of b) Mechanism motor suitable for aux.		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. : 0	Date: 14.07.14
		Page : 5 of 8	


	supply voltage of		
1.44	Value of capacitor included in GCB on generator transformer side (nF/phase)		
1.45	a) DOP of GCB local control panel b) Is DOP type test certificate for GCB LCP enclosed?		
1.46	Whether cable glands and lugs are included as per the specn.?		
1.47	Whether all interconnecting cables between various equipment of GCB and associated devices in bidder's scope are included?		
1.48	Whether sufficient quantity and types of spares are included for start up & commissioning of specified no. of GCBs?		
1.49	No. of series isolators provided per GCB on: Gen. trfr. side: Generator side:		
1.50	No. of earth-switches provided per GCB on: Gen. trfr. side: Generator side:		
1.51	Catalogues attached for GCB: for series isolator: for earth-switch:		
1.52	Earth switch		
	a) Manufacturer b) Country of manufacture		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001		
		Volume	Section	
	IIB			
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Rev. : 0	Date: 14.07.14
		Page : 6 of 8		


	<ul style="list-style-type: none"> c) Type designation d) Reference Standard e) Rated service voltage f) Rated frequency g) Rated normal current at 50 deg C h) Rated short time withstand current i) Rated peak withstand current j) Rated power frequency withstand voltage k) Rated impulse withstand voltage l) No. of poles per switch m) No. of control mechanism per switch n) Ambient air temp. limits o) Control circuit suitable for aux. supply voltage of? p) Mechanism motor suitable for aux. supply voltage of? 		
1.53	Series isolator		
	<ul style="list-style-type: none"> a) Manufacturer b) Country of manufacture c) Type designation d) Reference Standard e) Rated service voltage f) Rated frequency g) Rated normal current at 50 deg C 		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	IIB		
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Rev. : 0
		Page : 7 of 8	

	<p>h) Is series isolator fully compatible with GCB in respect of normal current ratings at various ambient temperatures?</p> <p>i) Rated short time withstand current</p> <p>j) Rated peak withstand current</p> <p>k) Rated power frequency withstand voltage</p> <p>l) Rated impulse withstand voltage</p> <p>m) No. of poles per switch</p> <p>n) No. of control mechanism per switch</p> <p>o) Ambient air temp. limits</p> <p>p) Control circuit suitable for aux. supply voltage of?</p> <p>q) Mechanism motor suitable for aux. supply voltage of?</p>		
1.54	<p>a) Whether all type tests have been conducted on GCB as per ANSI/IEEE C37.013 latest version?</p> <p>b) Have all the type tests been carried out at independent test laboratories?</p>		
1.55	Summary of Type test reports for GCB enclosed as Annex. No.		
1.56	Whether the offer includes performance of all site tests specified in the spec.?		
1.57	<p>a) Whether all type tests have been conducted on series isolator as per IEC 129?</p> <p>b) Summary of Type test reports for series isolator enclosed as Annex. No.</p>		
1.58	a) Whether all type tests have been conducted on earth-switch as per IEC 129?		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. : 0	Date: 14.07.14
		Page : 8 of 8	


	b) Summary of Type test reports for earth-switch enclosed as Annex. No.		
1.59	<p>a) Project sites and dates of commissioning of GCBs of same model and type (as quoted in 1.01 of this data sheet) - indicate for two earliest installations</p> <p>b) Does the equipment offered meet requirements of clause 2.29.00 of this specification</p>		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	IIB	D	
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	Rev. : 0	Date: 30.07.14
		Page : 1 of 8	


DATA SHEET –C

**TECHNICAL PARTICULARS
[TO BE SUBMITTED AFTER AWARD OF CONTRACT]**


SL.NO.		SPECIFIED	OFFERED
GENERATOR CIRCUIT BREAKER			
1.01	a. Manufacturer		
	b. Country of Manufacture		
	c. Type Designation		
1.02	Applicable Standard	ANSI/IEEE (C37.013)	
1.03	Rated voltage (kV)		
1.04	Rated frequency	50Hz	
1.05	Rated continuous current (A) at ambient temperature of: 40°C 50°C		
1.06	Interrupting medium	SF6	
1.07	Breaking capability		
i)	System source fault		
	a) Rated symmetrical breaking current (kA rms)		
	b) Rated asymmetrical breaking current (kA rms)		
	c) DC component		
ii)	Generator source fault		
	a) Rated symmetrical breaking current (kA rms)		
	b) Rated asymmetrical breaking current		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001		
		Volume	Section	
	IIB		Rev. :0	Date: 14.07.14
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Page : 2 of 8	


	(kA rms)		
	c) DC component		
	d) Suitability of GCB checked with Generator data.	Yes/ No	
1.08	Rated making current (kA _{peak})		
1.09	Rated duty cycle	CO -30 - CO	
1.10	Rated impulse withstand voltage (kV _{peak})		
1.11	Rated Power frequency 'dry test' withstand voltage: Earth (kV _{rms}): Across the pole (kV _{rms}):		
1.12	Type of cooling	Natural	
1.13	Maximum allowable temperature of main contacts (Deg. C)	105/90	
1.14	Degree of protection of breaker enclosure	Air leakage < 2%	
1.15	Whether canopy is required, if GCB is installed outdoor		
1.16	Voltage rating of motor driven pumps (in hydraulic mechanism)		
1.17	No. and KW rating of motor driven pumps		
1.18	Does GCB has provision of lockout features for open and close conditions of GCB?		
1.19	Stored energy of GCB is suitable for how many CO operations?		
1.20	Maximum current (A) under natural cooled conditions which can be carried by GCB at following ambient temperatures:		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. :0	Date: 14.07.14
		Page : 3 of 8	


	--°C		
	--°C		
	--°C		
	--°C		
	50°C		
1.21	Nominal Ratings of the basic model quoted: Normal current (A): Normal voltage (kV): Fault current (kA): Making current (kApeak): Dielectric withstand voltage (kVrms, kVpeak):		
1.22	Circuit breaker closing time (msec)		
1.23	Circuit breaker break time (msec)		
1.24	Whether specified safety interlocks and locking features provided as per the specification?		
1.25	Type of operating mechanism provided		
1.26	No. of poles: Whether three poles of the circuit breaker are gang operated?		
1.27	Whether circuit breaker has anti pumping feature?		
1.28	Whether circuit breaker has trip free mechanism?		
1.29	Whether lockout feature provided for the circuit breaker?		
1.30	Whether separate SF6 gas monitors		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. :0	Date: 14.07.14
		Page : 4 of 8	


	provided for each of the three phases of the circuit breaker?		
1.31	No. of SF6 gas monitors provided for each GCB		
1.32	a) No. of trip coils provided b) Voltage rating of trip coil c) Minimum operating voltage of trip coil		
1.33	Emergency current rating during loss of coolant (if applicable)		
1.34	Time available at rated current before load reduction		
1.35	Rate at which load current should be reduced		
1.36	Reduced continuous operating current		
1.37	Rated voltage range factor K		
1.38	Rated short circuit duty cycle		
1.39	Rated permissible tripping time		
1.40	Maximum permissible temperature rise of main contacts and conducting joints for continuous rating over the ambient air temperature of 50 deg C: Copper: Silver: Silver alloy:		
1.41	Minimum creepage distance		
1.42	Clearance in air of live parts - phase to earth		
1.43	a) Control circuit suitable for aux. supply voltage of b) Mechanism motor suitable for aux.		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. :0	Date: 14.07.14
		Page : 5 of 8	


	supply voltage of		
1.44	Value of capacitor included in GCB on generator transformer side (nF/phase)		
1.45	a) DOP of GCB local control panel b) Is DOP type test certificate for GCB LCP enclosed?		
1.46	Whether cable glands and lugs are included as per the specn.?		
1.47	Whether all interconnecting cables between various equipment of GCB and associated devices in bidder's scope are included?		
1.48	Whether sufficient quantity and types of spares are included for start up & commissioning of specified no. of GCBs?		
1.49	No. of series isolators provided per GCB on: Gen. trfr. side: Generator side:		
1.50	No. of earth-switches provided per GCB on: Gen. trfr. side: Generator side:		
1.51	Catalogues attached for GCB: for series isolator: for earth-switch:		
1.52	Earth switch		
	a) Manufacturer b) Country of manufacture		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. :0	Date: 14.07.14
		Page : 6 of 8	

	<ul style="list-style-type: none"> c) Type designation d) Reference Standard e) Rated service voltage f) Rated frequency g) Rated normal current at 50 deg C h) Rated short time withstand current i) Rated peak withstand current j) Rated power frequency withstand voltage k) Rated impulse withstand voltage l) No. of poles per switch m) No. of control mechanism per switch n) Ambient air temp. limits o) Control circuit suitable for aux. supply voltage of? p) Mechanism motor suitable for aux. supply voltage of? 		
1.53	Series isolator		
	<ul style="list-style-type: none"> a) Manufacturer b) Country of manufacture c) Type designation d) Reference Standard e) Rated service voltage f) Rated frequency g) Rated normal current at 50 deg C 		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	IIB		
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER		Rev. :0
		Page : 7 of 8	

	<p>h) Is series isolator fully compatible with GCB in respect of normal current ratings at various ambient temperatures?</p> <p>i) Rated short time withstand current</p> <p>j) Rated peak withstand current</p> <p>k) Rated power frequency withstand voltage</p> <p>l) Rated impulse withstand voltage</p> <p>m) No. of poles per switch</p> <p>n) No. of control mechanism per switch</p> <p>o) Ambient air temp. limits</p> <p>p) Control circuit suitable for aux. supply voltage of?</p> <p>q) Mechanism motor suitable for aux. supply voltage of?</p>		
1.54	<p>a) Whether all type tests have been conducted on GCB as per ANSI/IEEE C37.013 latest version?</p> <p>b) Have all the type tests been carried out at independent test laboratories?</p>		
1.55	Summary of Type test reports for GCB enclosed as Annex. No.		
1.56	Whether the offer includes performance of all site tests specified in the spec.?		
1.57	<p>a) Whether all type tests have been conducted on series isolator as per IEC 129?</p> <p>b) Summary of Type test reports for series isolator enclosed as Annex. No.</p>		
1.58	a) Whether all type tests have been conducted on earth-switch as per IEC 129?		

	2X660 MW BANHARPALLI , OPGCL	Doc. No. PE-TS-391-510-E001	
		Volume	Section
	TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	IIB	
		Rev. :0	Date: 14.07.14
		Page : 8 of 8	

	b) Summary of Type test reports for earth-switch enclosed as Annex. No.		
1.59	<p>a) Project sites and dates of commissioning of GCBs of same model and type (as quoted in 1.01 of this data sheet) - indicate for two earliest installations</p> <p>b) Does the equipment offered meet requirements of clause 2.29.00 of this specification</p>		



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001

VOLUME NO. : **II-B**

SECTION : **D**

REV NO. : **00** DATE : 15.02.2006

SHEET : 1 OF 12

CONTENTS

<u>CLAUSE NO.</u>	<u>DESCRIPTION</u>	<u>PAGE NO.</u>
1.00.00	SCOPE	2
2.00.00	GENERATOR CIRCUIT BREAKER	3
3.00.00	COLOUR OF PAINT	7
4.00.00	TESTS	8
5.00.00	QUALITY PLAN	9
6.00.00	SPARES	11
7.00.00	SPECIAL TOOLS & TACKLES	12
8.00.00	SUPERVISION OF ERECTION, TESTING & COMMISSIONING	13
9.00.00	TRAINING OF ENGINEERS	14
10.00.00	DOCUMENTS REQUIRED ALONGWITH TECHNICAL OFFER	15
11.00.00	DOCUMENTS REQUIRED AFTER THE AWARD OF LOI	16
12.00.00	O & M MANUAL	17
13.00.00	TECHNICAL DEVIATIONS	18



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 2 OF 12

1.00.00 SCOPE

1.01.00 The scope shall include planning, design, engineering, manufacturing, assembly, testing, inspection, packing, supply, transportation of equipment related to Generator Circuit Breaker and associated equipment and services:

- Generator circuit breaker [as per quantity indicated in Data Sheet –A/BOQ-Cum-Price Schedule].
- Start-up and commissioning spares.
- Mandatory spares, as specified.
- Recommended spares for three (3) years of plant operation and maintenance.
- Special tools and tackles.
- Supervision of erection, testing & commissioning.
- Training of engineers.

1.02.00 Terminal points:

- Bus bar of GCB.
- Enclosure of GCB.
- Cable glands and lugs in Local Control Panel.
- Earthing terminals of GCB Local Control Panel.



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 3 OF 12

2.00.00 GENERATOR CIRCUIT BREAKER

- 2.01.00 The generator circuit breaker (GCB) shall be of the metal enclosed type suitable for direct connection to phase isolated generator bus duct in a manner designed to preserve the phase isolated principle. The breaker shall have continuous and short time current ratings as those indicated for Generator Bus Duct in the Data Sheet - A.
- 2.02.00 The interrupters of the circuit breaker shall be SF6 type. The rated duty cycle shall be CO - 30 minutes - CO.
- 2.03.00 The circuit breaker shall be operated with a hydraulic/spring charged operating mechanism. All the three poles of the circuit breaker shall be gang operated. The circuit breaker shall have antipumping feature.
- 2.04.00 Protection shall be provided to take care of possible failure of the hydraulic system that drives the breaker. Upon failure of the hydraulic system in the open position, the breaker shall remain locked in open position and shall not tend to close. Similarly, upon failure of the hydraulic system in the closed position, the breaker shall remain locked in closed position.
- 2.05.00 Each three-phase circuit breaker shall have a hydraulic system complete with all associated pipework etc. or spring charged mechanism system complete with all accessories. The total stored energy in the operating system offered shall be sufficient for 2 CO operations for hydraulic and O-C-O operations for spring charged mechanism.
- 2.06.00 The number of motor driven hydraulic pumps shall be included by bidder as per bidder's standard and proven practice, ensuring utmost reliability of the operating system. Bidder in the bid shall declare the number of motor driven hydraulic pumps included.
- 2.07.00 Each circuit breaker shall be provided with a shunt opening release. Such release shall have duplicate actuating coils. These coils shall be capable of opening the circuit breaker at any load or short circuit with the voltage at coil terminals reduced to 56 % of the rated operating voltage of the coil.
- The trip coils are to be rated for DC auxiliary voltage specified in Data-Sheet-A and the minimum operating voltage of the trip coils shall be 56% of rated DC voltage. Both the trip coils shall be monitored.
- GCB shall have closing coil and tripping coil supervision relays.
- 2.08.00 SF6 gas monitor(s) shall be provided for each circuit breaker by bidder as per bidder's standard and proven practice, ensuring utmost reliability of the equipment and failsafe monitoring of SF6 gas, covering all phases and associated pipework. Bidder in the bid shall declare the number of SF6 gas monitor(s) included.
- Interlock shall be provided to prevent breaker from opening when the SF6 gas density falls to a level, which is inadequate to complete a successful opening operation of the breaker at its rated capacity.
- 2.09.00 Each phase of the circuit breaker shall be enclosed in a non-magnetic (Aluminium alloy) enclosure. The degree of protection of the enclosure shall be such that the air leakage



TITLE : TECHNICAL SPECIFICATION FOR GENERATOR CIRCUIT BREAKER	SPECIFICATION NO. PE-SS-999-510-E001
	VOLUME NO. : II-B
	SECTION : D
	REV NO. : 00 DATE : 15.02.2006
	SHEET : 4 OF 12

rate shall not exceed 5% of the total enclosure volume per hour. The enclosure shall be minimum flux type so as to prevent heating of nearby metallic structures.

- 2.10.00 Support insulators shall be interchangeable and of high creepage distance, high mechanical and dielectric strength as required by the circuit breaker. Insulators shall be so mounted as to provide easy access for cleaning and removal.
- 2.11.00 The design and testing of the generator circuit breaker shall be in line with IEEE C37.013 latest version.
- 2.12.00 The arrangement shall include earth switch as per Data Sheet - A. The design and testing of the earth switch shall be in line with IEC129.
- 2.13.00 The arrangement shall include a series isolator as per Data Sheet - A. The design and testing of the isolator shall be in line with IEC129.
- 2.14.00 ~~Single phase Voltage Transformers (VT) and Lightning Arresters (LA) shall be included on each phase of GCB assembly as per the technical particulars & quantities specified in Data Sheet - A of this specification. VT primary leads shall be provided with suitable HT fuses and the neutral formation of VT primary windings shall be grounded as stipulated in Data Sheet - A. VT secondary leads shall be brought to terminal blocks & in GCB LCP after providing suitable fuses/ MCBs and the neutral formation of secondary leads shall be grounded.~~
- 2.15.00 Following interlocks and locking facilities shall be provided:
- a) It shall be possible to key-lock the series isolator in 'open' position blocking both electrical and hand closing of the isolator.
 - b) Key interlock shall be provided to prevent unauthorized operation of GCB.
 - c) Interlock shall also be provided between GCB and isolator.
 - d) Interlock shall also be provided between earth-switch and isolator.
- 2.16.00 GCB, isolator and earthing switch shall have separate operating mechanism. The operating mechanism for isolator and earth switch shall be motor operated.
- Hand operation of the operating mechanism shall also be possible for GCB, isolator and earthing switch.
- 2.17.00 Each three-phase circuit breaker shall have a local control panel, for control of the auxiliaries. It shall have all the necessary indication for gas (SF6) pressure, temperature etc. as per the standard practice of the manufacturer.
- Local control panel shall also contain, stay put type local/remote selector switch, spring return to neutral control switch for GCB, isolator & earth switch, electrically operated position indicator for GCB, isolator & earth switch etc.
- 2.18.00 Mimic diagram shall be provided on local control panel (LCP). Electrically operated semaphore indicators shall be used for indicating status of GCB, isolator and earth



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 5 OF 12

switch. Semaphore indicators shall form part of the mimic diagram. In case of failure of auxiliary DC supply, indicating bar of semaphore indicators shall take 45° position.

2.19.00 Requirement of potential free auxiliary contacts for purchaser's use is indicated below:

GCB : 12NO + 12NC
Each Isolator : 8NO + 8NC
Each Earth Switch : 8NO + 8NC

These contacts shall be wired to the terminal blocks of LCP for external use.

2.20.00 Two nos. incoming DC supply feeders will be made available by purchaser for GCB. Necessary arrangement shall be provided in GCB LCP for receiving these two feeders. Independent MCBs and voltage supervision relays shall be provided in GCB LCP for each DC supply.

2.21.00 a) It shall be possible to know abnormal or fault or lockout conditions from GCB local control panel. Visual annunciation shall be provided for this purpose alongwith 'lamp reset' and 'lamp test' push buttons on GCB LCP.

b) Separate sets of contacts for annunciation of various abnormal conditions of GCB in CCR shall be provided.

c) Two sets of contacts of GCB lockout conditions (when GCB is 'closed') shall be provided for interlocking in generator protection scheme. This is in addition to the requirements of GCB abnormal condition contacts given in b) above.

d) Potential-free contacts shall be provided on GCB LCP for indication in CCR for following conditions:

- i) GCB selected for remote control
- ii) GCB ready for 'close'

e) Potential-free contacts shall also be provided on GCB LCP for 'DC failure at GCB'.

2.22.00 Operation counter for GCB shall be provided in Local Control Panel.

2.23.00 Gland plate of local control panel shall be of adequate size for terminating external cables using glands. No. of external cables shall be finalized after the award of LOI.

2.24.00 Spare terminals shall be provided in local control panel. Number of spare terminals shall not be less than 10%.

2.25.00 All interconnecting cables between various equipment in the scope of the bidder shall be included by bidder in his scope.

2.26.00 GCB normal current rating, short time withstand current rating, peak withstand current rating, insulation levels, etc. shall not be less than those given for generator busduct given in Data Sheet-A.

2.27.00 Generator Circuit Breaker shall be suitable for busduct fault levels given in Data Sheet - A. Bidder must also establish that the model quoted is suitable for asymmetrical and symmetrical short circuit current contribution from generator side to a 3-phase and 2-



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 6 OF 12

phase fault. Generator reactances and time constants are given in Data Sheet -A to enable bidder to compute generator side fault current and establish GCB suitability. Bidder must take a negative tolerance of 15% on generator reactances and an over-voltage factor of 1.05 for calculating the fault currents. Also, both no-load and full-load conditions of generator shall be considered.

Bidder must also include the computations/ verification checks for the above in the bid. In the absence of this, the bid will be treated as incomplete and liable to be rejected.

2.28.00 Cable glands, cable lugs and foundation bolts shall be supplied along with GCB.

The required quantity of glands and lugs for terminating purchaser's external cables shall be finalized during contract engineering and there shall be no price implication on this account.

2.29.00 Bidder to ensure that the equipment offered has been in successful operation after commissioning at two different power plants for at least two years as on date of this enquiry.

3.00.00 COLOUR OF PAINT

The colour of paint shall be intimated to the vendor after the award of LOI and there shall be no commercial implication on this account.



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 7 OF 12

4.00.00 TESTS

4.01.00 ROUTINE TESTS

The equipment shall be completely assembled, wired, adjusted and routine tested at manufacturer's works as per applicable standards.

4.02.00 TYPE TESTS

All equipment offered should be of type-tested design. Offered model of GCB should have been type tested as per latest version of standard ANSI/IEEE C37.013. Series isolator and earth switch should have been type tested as per latest version of standard IEC-129.

Any specific requirement of conducting type tests against this enquiry is included in Data Sheet – A/Sec-C.

4.03.00 SITE TESTS

Each generator circuit breaker shall be subjected to the following tests after it is totally assembled at site in its final location.

- i/ Leakage tests alongwith generator busduct
- ii/ Gauge tests
- iii/ Stored energy system tests
- iv/ Electrical resistance of current path tests
- v/ Clearance and mechanical adjustment check tests
- vi/ Timing tests
- vii/ Low frequency withstand voltage tests

4.04.00 WITNESSING OF TESTS

All tests shall be performed in presence of purchaser's representatives.

The vendor shall give at least 45 days advance notice for routine tests and type tests (if required as per cl. 4.02.00).



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 8 OF 12

5.00.00 QUALITY PLAN

a. The manufacturer shall draw a detailed Quality Plan for approval covering testing on all major component like, enclosures, castings, forgings, insulators, springs, contacts, nozzles, cylinders (SF6), manometers, pressure switches, density meters, valves, pipes and fittings, pumps, coils (for tripping and closing), heaters, relays, filters, base frame, support structures, SF6 gas, terminals, etc. The tests shall include all applicable tests like, material, chemical and other tests as per relevant material and international standard. The critical casting and forgings and weld joints shall also be subject to UT/RT and dye penetration examination to ensure freedom from defects. All pressurized vessels/enclosures shall be pressure and leak tested at 1.5 times the design pressure or twice the operating pressure.

b. The assembled generator circuit breaker shall be tested in accordance with relevant IEC/Test procedure, etc. The manufacturer shall draw up a detailed test procedure for routine and type test for BHEL/ultimate customer review and approval. The tests to be carried out shall include following but not limited to same:

1. ROUTINE TESTS ON GCB

- a. Check completeness of breaker and associated control system.
- b. Millivolt drop test
- c. Mechanical operation test as per IEC
- d. Determination of leak rate of SF6 & moisture condensation determination (dampness rate)
- e. Determination of breaker operating times including speed (under various conditions of driving mechanism and various pressure and voltage conditions).
- f. PF high voltage tests on breakers as per IEC56 Clause 20 Part-IV (with poles closed and open conditions).
- g. Functional and performance test of all control circuits, trip and alarms circuits with breaker connected.
- h. Drive mechanism
 - i/ Performance tests
 - ii/ Functional tests
 - iii/ Resistance of trip coils
 - iv/ Check performance of safety valves
 - v/ Operation of pressure switches and setting ranges.
 - vi/ Check motor current consumption and also the ratings.
- i/ Check performance of gang operated switches and the auxiliary contact terminals as per schematic arrangement.



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 9 OF 12

2. ROUTINE TESTS ON ISOLATOR AND EARTH-SWITCH

Routine tests on isolator and earth-switch shall be conducted as per IEC 129.

6.00.00 SPARES

- 6.01.00 Start-up and commissioning spares are those which may be required during the start-up and commissioning of the equipment.
- 6.02.00 Mandatory spares shall be quoted as applicable as per Data Sheet-A.
- 6.03.00 The bidder shall include and provide a list of recommended spares for 3 years of normal operation of the plant.
- 6.04.00 Various schedules of spares to be submitted alongwith the bid shall indicate description of spare parts alongwith type designation, quantity, unit price, total price etc.

7.00.00 SPECIAL TOOLS & TACKLES

- 7.01.00 Bidder shall offer one set of unused special tools and tackles which are required for erection, assembly, disassembly, adjustment, commissioning and overhauling of GCB.
- 7.02.00 These tools and tackles shall be separately packed and sent to site prior to erection of GCB.
- 7.03.00 List of special tools and tackles, alongwith quantity shall be furnished as a part of technical offer.

8.00.00 SUPERVISION OF ERECTION, TESTING AND COMMISSIONING

Bidder shall quote for supervision of erection, testing and commissioning of each GCB. Details shall be furnished in the technical offer.

Required instruments for site testing of GCB shall be arranged by the vendor, in case the same are not available at site. These instruments shall be brought by the vendor and shall be taken back after completion of commissioning.



TITLE :

**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.

PE-SS-999-510-E001

VOLUME NO. : **II-B**

SECTION : **D**

REV NO. : **00** DATE : 15.02.2006

SHEET : 10 OF 12

10.00.00 DOCUMENTS REQUIRED ALONG WITH TECHNICAL OFFER

Bidder shall submit following documents alongwith technical offer:

- a] Filled in Data Sheet -B.
- b] Technical leaflet/ catalogue.
- c] Correction curves/ tables to arrive at current rating of GCB and series isolator at various ambient temperatures.
- d] Verification checks for short circuit capability for generator side fault contribution (refer clause 2.27.00 of this specification).
- e] General Arrangement drawing of GCB showing various dimensions, space required for operation and maintenance, weight etc.
- f] Summary of Type tests certificates indicating key test results, clause & standard reference, date and place of testing.
- g] Write up on operating mechanism of GCB.
- h] Schedule of deviations.
- i] Schedule of start-up and commissioning spares. (Unpriced)
- j] Schedule of Mandatory spares. (Unpriced)
- k] Schedule of O/M spares (Recommended) for 3 years of plant operation. (Unpriced)
- l] Schedule of special tools and tackles. (Unpriced)
- m] Reference list.



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 11 OF 12

11.00.00 DOCUMENTS REQUIRED AFTER THE AWARD OF LOI

Bidder shall submit following documents after the award of LOI for approval and distribution:

- a] Filled in data sheet.
- b] Detailed general arrangement drawing of GCB showing various dimensions, space required for operation and maintenance, weights etc. (GA drawing to be complete for GCB and auxiliaries.)
- c] Foundation arrangement drawing showing loading, forces at various points etc.
- d] General arrangement drawing of local control panel.
- e] Logic for closing/tripping of GCB, isolator and earth-switch.
- f] Electrical control scheme of local control panel.
- g] Drawings for operating mechanism.
- h] P & I Diagram.
- i] Type tests certificates.
- j] Manufacturing Quality Plan.
- k] Field quality plan for equipment storage, handling, erection, testing and commissioning at site, recommended by vendor.
- l] O & M Manual.
- m] Routine test certificates.

11.01.00 All drawings, documents shall be in English.

11.02.00 The vendor after LOI shall submit drawings/documents in requisite number of copies as indicated in ATTACHMENT-V ("DOCUMENTS / DRAWINGS DISTRIBUTION SCHEDULE").



TITLE :
**TECHNICAL SPECIFICATION FOR
GENERATOR CIRCUIT BREAKER**

SPECIFICATION NO.
PE-SS-999-510-E001
VOLUME NO. : **II-B**
SECTION : **D**
REV NO. : **00** DATE : 15.02.2006
SHEET : 12 OF 12

12.00.00 O & M MANUAL

The vendor shall submit after the award of LOI, draft O & M manual for approval. Final O & M manuals shall be properly bound.

12.01.00 The instruction manual shall contain full details and drawings of all the equipment furnished, the storage procedures, erection and testing procedures, operation and maintenance procedure of the equipment.

12.02.00 The operating and maintenance instructions of the equipment shall be in sufficient details to enable the Owner to maintain, dismantle, reassemble and adjust all parts of the equipment. They shall give a step-by-step procedure for all operations likely to be carried out during the life of the plant/ equipment including erection, testing, commissioning, operation, maintenance, dismantling, repair and assembly. Each manual shall also include a complete set of approved drawings together with performance/ rating curves of the equipment and test certificate wherever applicable.

12.03.00 The instruction manuals shall also include the spare part catalogue for all the equipment.

12.04.00 A separate section of the manual shall be for each size/ type of equipment and shall contain a detailed description of construction and operation, together with all relevant pamphlets, drawings and list of parts with procedure for ordering spares. Maintenance instructions shall include charts showing lubrication, checking, testing and replacement procedures to be carried out daily, weekly, monthly and at longer intervals to ensure trouble free operation. Where applicable, fault location charts shall be included to facilitate finding the cause of mal-operation or break down. A collection of manufacturer's standard leaflets will not be accepted as a compliance of this clause. The manual shall be specifically compiled for the concerned project.

13.00.00 TECHNICAL DEVIATIONS

Bidder shall clearly indicate deviations in the offer. Only the deviations which are specifically mentioned in the offer in the prescribed Deviation Schedule shall be considered, otherwise it shall be presumed that offer is fully in conformance to the specification.