

**RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD.  
2 x 660 MW SURATGARH SUPER CRITICAL TPS  
UNIT # 7 & 8**


**VOLUME IIB**

**TECHNICAL SPECIFICATION  
FOR  
PUBLIC ADDRESS SYSTEM**

**SPECIFICATION NO.: PE-TS-392-557-E001, (REV. 00)**




**BHARAT HEAVY ELECTRICALS LIMITED  
POWER SECTOR  
PROJECT ENGINEERING MANAGEMENT  
NOIDA, UTTAR PRADESH, INDIA**

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section
		Rev. : 00
		Page : 1 of 1

### CONTENTS

S.NO.	CONTENT	PAGE NO.
<b><u>VOLUME II B:</u></b>		
1.	<b>PREAMBLE</b>	2
2.	<b>SECTION-A</b>	
	SCOPE OF SUPPLY	1
3.	<b>SECTION-B</b>	
	PROJECT INFORMATION	4
4.	<b>SECTION-C</b>	
	SPECIFIC TECHNICAL REQUIREMENTS	7
	BILL OF QUANTITY	2
	DATASHEET-A	4
	LIST OF DRAWINGS/ DOCUMENTS DISTRIBUTION	2
	BLOCK DIAGRAM	3
	PA SYSTEM DRAWINGS & DOCUMENTS	2
	QUALITY PLAN	6
5.	<b>SECTION-D</b>	
	STANDARD SPECIFICATION OF PUBLIC ADDRESS SYSTEM	26
	DATA SHEET-B	5
	DATA SHEET-C	6
	CODES AND STANDARDS	1

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section
		Rev. : 00
		Page : 1 of 2

1.0 The Tender documents contain two (2) volumes. The bidder shall meet the requirements of all the volumes.

1.1 **VOLUME - I      CONDITIONS OF CONTRACT**

This consists of four parts as below:-

**Volume – IA**      This part contains Instructions to bidders for making bids to BHEL.

**Volume – IB**      This part contains General Commercial Conditions of the Tender & includes provision that vender shall be responsible for the quality of item supplied by their sub-vendors.

**Volume – IC**      This part contains Special Conditions of Contract.

**Volume – ID**      This part contains Commercial conditions for Erection & Commissioning site work, as applicable.

1.2 **VOLUME – II      TECHNICAL SPECIFICATIONS**

Technical requirements are stipulated in Volume – II, which comprises of:-

**Volume – IIA**      General Technical Conditions.

**Volume – IIB**      Technical Specification including Drawings, if any.

1.2.1 **VOLUME – IIB**


This volume is sub-divided in to following sections:-

**Section – A**      This section outlines the Intent of Specification

**Section – B**      This section provides “Projection Information”.

**Section – C**      This section indicates Technical Requirements specific to Contract, not covered in Section - D


**Section – D**      This section comprises of Technical Specifications of Equipments Complete with Data Sheets A , B , C.

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section
		Rev. : 00
		Page : 1 of 2

**Data sheet - A :-** Specific data and other requirements pertaining to the equipments.


**Data sheet – B :-** Indicates data / documents to be furnished at the time of submission of Offer by vendor

**Data sheet – C :-** Indicates data / documents to be furnished after the award of Contract as per agreed schedule by the vendor (as applicable)

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :A
		Rev. : 00
		Page : 1 of 1

## SCOPE OF SUPPLY

- 1.0 This specification covers the design, manufacture, inspection and testing at manufacturer's works, proper packing and delivery to site, system engineering, testing, erection and commissioning of **PUBLIC ADDRESS SYSTEM** as mentioned in different sections of this specification for **2X660 MW SURATGARH STPS**.
- 2.0 It is not the intent to specify herein all the details of design & manufacture. However, the equipment shall conform in all respects to high standards of design, engineering and workmanship and shall be capable of performing in continuous commercial operation.
- 3.0 The general terms and conditions, instructions to bidders and other attachment referred to elsewhere are hereby made part of the Technical Specification.
- 4.0 The bidders shall be responsible for and governed by all requirements stipulated hereinafter.
- 5.0 Deviations, if any, should be brought out very clearly on deviation sheet enclosed with specification only. Otherwise it will be presumed that the bidder's offer is in line with what has been stated/ asked for in this specification.
- 6.0 The offer should be complete with technical data, catalogue, brochures and drawings as applicable.
- 7.0 Qualification data: In order to be able to present to the client the proven-ness of the equipment offered, the bidder is required to elaborate details of experience, capabilities, reference list etc. in the offer.
- 8.0 The documents shall be in English language and MKS system of units.
- 9.0 Bidder shall quote for all type of PA system items as per specification, failing which their offer shall be rejected.
- 10.0 For every shipment made to site, a shipping list containing item reference (item no. & description as per specification Bill of material of package drawing) and quantity of the same (nos.) shall be provided by the vendor at the time of dispatch of material to site.

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :B
		Rev. : 00
		Page : 1 of 1

## PROJECT INFORMATION

SPEC.NO. TCE.5750A-H-500-001	<b>TATA CONSULTING ENGINEERS LIMITED</b>	VOLUME II SECTION – B
	<b>RRVUNL, 2 x 660 MW, Super-Critical TPS, Stage-V, Unit # 7 &amp; 8 at Suratgarh, Rajasthan</b> GENERAL PROJECT INFORMATION	SHEET 1 OF 3

1.0	Owner	Rajasthan Rajya Vidyut Utpadan Nigam Ltd., Jaipur
2.0	Consulting Engineer	TATA Consulting Engineers Ltd. 73/1, St. Marks Road, Bangalore – 560 001  Tel : 080 – 6622 6000 Fax : 080 – 22274874
3.0	Location of the plant	Prabat Nagar, Suratgarh Sriganganagar district, Rajasthan.
4.0	Latitude and longitude	Latitude : 29 deg. 10 min. N Longitude : 74 deg.01 min. E
5.0	Elevation above mean sea level	186 m (approximate)
6.0	<b>Climatic conditions</b>	
6.1	Temperatures : Monthly basis	
	Mean of daily max.	32.8 deg.C (in the month of May)
	Mean of daily min.	17.6 deg.C (in the month of Jan)
6.2	Temperatures : Annual basis	
	Mean of daily max.	32.3 deg.C
	Mean of daily min.	19.6 deg.C
	Highest temperature recorded	50 deg.C
	Lowest temperature recorded	(-) 2.8 deg.C
	Design Ambient Temperature for Electrical Equipment design	50 deg C
6.3	Relative humidity	Varies between 21% and 81%
6.4	Annual average rain fall	312 mm
6.5	Annual mean wind speed :	4 km / hr.
7.0	Wind load	

ISSUE  
R1

SPEC.NO. TCE.5750A-H-500-001	<b>TATA CONSULTING ENGINEERS LIMITED</b>	VOLUME II SECTION – B
	<b>RRVUNL, 2 x 660 MW, Super-Critical TPS, Stage-V, Unit # 7 &amp; 8 at Suratgarh, Rajasthan</b> GENERAL PROJECT INFORMATION	SHEET 2 OF 3


	Calculations for wind effect shall be in accordance with IS:875-1987(Part-3) taking into account the following:	
	a) Basic wind speed = 47 m/sec	
	b) Factor K1 = 1.07	
	c) Category of terrain = Category 2	
	d) K3 – as per IS 875	
8.0	Seismic data (As per IS: 1893 latest issue)	
	a) Zone	Zone II
	Designs & design coefficients shall be based on IS 1893:2002	
	Design condenser cooling water inlet temperature	33 Deg C
9.0	Auxiliary power supply:	
	Auxiliary electrical equipment to be supplied against this specification shall be suitable for operation on the following system:	
	a) For motors rated 160 kW and below.	415V AC, 3-phase, 3-wire effectively earthed.
	b) For motors rated above 160 kW and up to 1500 kW	6600V AC, 3-phase, 3-wire, 50 Hz, non-effectively earthed
	c) For motors rated above 1500kW	11000V AC, 3-phase, 3-wire, 50 Hz, non-effectively earthed
	d) For motor control centres	415V AC, 3-phase, 3/4-wire effectively earthed.
	e) DC motor starters, DC solenoids, DC alarm control and protection	220 V DC, 2-wire unearthed
	f) AC control & protective devices	110 V 1 phase, 50Hz, 2 wire AC supply. The single phase 110V AC supply shall be derived by VENDOR by providing 415V / 110 V Control transformers of adequate rating with MCCB / MCB on both the primary and secondary sides.
	g) Uninterrupted power supply	230 V, 1-phase, 50 Hz, 2-wire, AC

ISSUE  
R1



***SECTION – C***

**SPECIFIC TECHNICAL  
REQUIREMENTS**

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00
		Page : 1 of 6

## 1.0 INTENT OF SPECIFICATION

This specification covers the design, manufacture, assembly, testing and inspection at vendor's/sub-vendor's works, packing, despatch to site, system engineering and erection & commissioning of central exchange type Public Address System as described in the various sections of this specification. Public Address System shall generally conform to IS. It is not the intent to completely specify all details of design and construction herein.

## 2.0 SCOPE OF SUPPLY AND SERVICES


- 2.1 The scope of supply and services covers the complete supply of equipment and services for central exchange type distributed amplifier Public Address System in accordance with the requirements of various sections of this specification.
- 2.2 The scope of supply shall be as per Price Schedule enclosed as Annexure-1(A & B).
- 2.3 Public address system shall be provided for the entire plant including switchyard, CHP, AHP and other offsite areas.
- 2.4 Consumables such as cable glands, cable lugs, ferrules, tags, self locking clamps, screws, supports, fixing hardware and special supporting structure, as required for outdoor/indoor equipment erection shall be included as part of supply. Wherever the quantity has been specified as on as required basis, the same are to be supplied on as required basis without any cost implication to the Contractor from the quoted lump sum price.
- 2.5 The bidder shall furnish the system write-up, complete erection/mounting drawing for each of the equipment, testing & commissioning procedure for individual equipment and for complete PA system.
- 2.6 The Bidder's scope shall also include successful demonstration of performance testing specified herein complete in all respects along with cables, junction boxes, earth wire and accessories like standard brackets, nut-bolts, glands, lugs, conduit sleeves, etc., as required, to complete the proper installation conforming to IS: 1881, IS: 1882 of all the equipments supplied as covered in this specification.

## 3.0 TERMINAL POINTS

Incoming power supply to Power Distribution Box (PDB)

## 4.0 POWER SUPPLY:

The system shall be suitable for operation from 230V AC 1-phase supply. For TG building central exchange, there will be two UPS supply feeders. In event of failure of one UPS supply, it will switch automatically to another UPS supply through auto

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00
		Page : 2 of 6

changeover. However, in CHP area, there will be two CHP UPS supply feeders with auto changeover facility.

## 5.0 ZONE WISE DISTRIBUTION OF SYSTEM

5.1 The central exchange type PA system shall comprise three separate zones:

- a) Zone-I for Unit-1 area
- b) Zone-II for Unit-2 area
- c) Zone-III for Common Plant Area
- d) Zone-IV for coal handling area with two sub-zones, sub-zone-I and sub-zone-II.

All the above zones shall be connected with a central exchange to be located In Control room/Control Equipment room. Another exchange to be located in Coal Handling Plant (CHP) Control room shall connect all the sub-zones of Coal Handling Plant. The Sub zones of CHP areas shall be connected to the central exchange through this exchange only.

5.2 There will be four master control stations. One for each unit will be located in unit control room. One for common area and one for CHP area. Each zone shall have number of subscriber room. One for common area and one for CHP area. Each zone shall have number of subscriber stations. Each station can do conversation with other stations and with master control station.

5.3 Master control station for CHP exchange shall be located on the CHP control desk. CHP sub-exchange shall be connected to the central exchange for communication with other zones from handsets in CHP sub-zones

5.4 The block diagram of different zones & their interconnections is enclosed as per dwg no: PE-DG-392-557-E001. Similarly the system block diagram for PA system is enclosed as per dwg no: PE-DG-392-557-E002 as Annexure-3.


## 6.0 OPERATION:

6.1 Communication within a zone:

The system shall have two independent channels, which function simultaneously for communication viz page channel & party channel. The selection of channel is through a press to page switch at the handset. At the time of announcement, a call attention tone shall automatically precede over the system loudspeaker. Two-way communication over party channel can be established by simply lifting hand set by the call party. The system shall be suitable for common talking so that any number of stations can join in conference on party channel.

During party channel mode, page channel is free to receive any announcement. A mute switch is provided to mute the associated loudspeaker, if required when engaged in party channel.

6.2 Inter zone communication:

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00
		Page : 3 of 6

Any station of any zone can call station of other zone through master station by operating a button to connect the master station. Call from master station shall be initiated by operating a button to all zones or by operating a button of particular zone to the corresponding zone.


## 7.0 TYPES OF HANDSET STATIONS

Following types of handset stations are envisaged:

- a) Type-A: Wall/column mounted station with built-in amplifier and Cone type speaker for indoor area.
- b) Type-B: Wall/column mounted station with built-in amplifier and horn type speaker and canopy for outdoor area.
- c) Type-C: indoor desktop mounted station with cone type speaker.
- d) Type-D: Wall/column mounted flameproof type station with built-in amplifier and speaker
- e) Type-E: Master control station with built-in amplifier and speaker.
- f) Type-F: Portable station complete with handset, speaker, amplifier, push buttons, indication lamps and coupling cable terminated by a plug.
- g) Type-G: Pilfer proof type station with built-in amplifier and speaker.

## 8.0 TECHNICAL PARAMETERS

- For overall installation bandwidth (+/-3 dB) shall be 400-6000 Hz.
- For amplifier bandwidth (+/-3 dB) shall be 200-10,000 Hz. Total Harmonic Distortion shall be less than 1% at rated output at 1 kHz. Signal/Noise ratio shall be 60 dB.
- For microphone bandwidth (+/-3 dB) shall be 200-7000 Hz. Type shall be noise cancelling type.
- For outdoor wall/column mounted horn type loudspeakers, capacity bandwidth (+/-3 dB) shall be 15W (RMS) and 500-4500 Hz respectively.
- For indoor wall/column mounted cone type loudspeakers, capacity bandwidth (+/-3 dB) shall be 4W (RMS) and 200-7000 Hz respectively.

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00
		Page : 4 of 6

## 9.0 SIGNAL LOOP LENGTH

The signal loop length will be around 4 Km in unit area, around 8 Km in coal handling plant area and around 7 Km in common plant area from the central exchange. Further, the distance between two stations in areas other than unit may be more than 1 Km. Bidder shall provide necessary repeaters, power supply modules etc to meet the requirement of the same.

## 10. COLOUR OF EQUIPMENT

Paint shades for all equipments are subjected to BHEL/customer approval during contract stage without commercial implications. All painting shall be through powder coated epoxy base paint.

## 11. CABLES & CABLING

11.1 Following power, signal & loudspeaker cables will be used:

- a) Power cable : 3C-2.5 mm<sup>2</sup> Cu armoured.
- b) Signal cable : 4P-0.5 mm<sup>2</sup> (14/0.193mm) Cu overall screened armoured.
- c) Loud speaker cable : 2P-0.75 mm<sup>2</sup> (23/0.193mm) Cu overall screened armoured.

11.2 The cable size between MDF to SDF will be 24P-0.5 mm<sup>2</sup> / 12P-0.5 mm<sup>2</sup> as per requirement.

11.3 If different size of cable is required, bidder must intimate in their offer.

11.4 The PA system cables will be laid in ready trays routed in different areas of power plant for power & signal cables. Power cable will run in separate trays, similarly the signal cables will run in separate trays.

11.5 Cable glands shall be double compression type.

## 12.0 ACOUSTIC HOOD:


The acoustic hood will be provided in noisy area like BFP, turbine, firing floor, mills, fans etc. The Stations envisaged inside the acoustic hood shall not be provided with canopy.

## 13.0 JUNCTION BOXES:

All junction boxes (JB) shall be made of polycarbonate/FRP/Di-cast aluminium material, door handle, self-locking with common key, door gasket shall be of synthetic rubber & provided with cage clamp type terminal blocks.


## 14.0 INTERFACES WITH EXISTING EXCHANGE:

PA system central exchange will be interfaced with new as well as with existing EPABX

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00
		Page : 5 of 6

supplied by others.

- 15.0 PA system shall be interfaced with fire alarm panel. Bidder's to provide necessary provision for the same in schemes.
- 16.0 Locations in different zones for different type of handset stations and loudspeakers shall be furnished later.
- 17.0 Bidder shall furnish separately the power supply requirements (in watts) for both central exchanges along with different stations attached to each exchange to decide the feeder size.
- 18.0 Design engineering includes submission of data sheets of each equipment along with GA drawings, technical write-up of the system, schemes & interconnection dwgs as per equipment layout in different zones, various schedules and bill of material. Mounting arrangement drawings of different equipments, testing & commissioning guidelines, operation & maintenance manuals for complete system.
- 19.0 Makes of equipment/components shall be subject to BHEL/OWNER approval during detailed engineering. However, bidder shall furnish the list of makes along with the offer.
- 20.0 Three sets of hard as well soft copies (in pdf form) of dwg/documents will be required for the purchaser's review/ approval.
- 21.0 After completion of work at site, bidder shall prepare 'AS BUILT and O&M Manuals'. The number of copies of documents/data to be submitted as distribution print shall be as per enclosed Annexure-4.
- 22.0 INSPECTION & TESTING
- 22.1 All equipment shall be subjected to routine test as per relevant standards.
- 22.2 A sample copy of Quality Plan is enclosed (as Annexure-5) with the specification. During detailed engineering, the bidder shall furnish this QP in desired format for purchaser/customer approval. The inspection shall be carried out as per Quality Plan (QP) approved by purchaser/customer without any implication on cost and delivery.
- 22.3 The bidder shall furnish the type tests certificates as specified in the specification for purchaser/customer review/acceptance. If type tests are found non-satisfactory then the bidder has to carry out the type test without any price and delivery implication to BHEL.
- 22.4 For all components / materials, for which Type tests have not been specified in the specification, only type test reports shall be furnished by the bidder. In absence of such type tests reports or in case such reports are not found to be meeting the specification/standards

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
	<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>	Section : C
		Rev. : 00 Page : 6 of 6

requirements, bidder shall conduct, free of cost to the purchaser, all such type tests according to the relevant standards and reports shall be submitted to the owner for approval.

**23.0 OTHER IMPORTANT CONSIDERATIONS:-**

- 23.1 For price comparison purpose Annexure-1(A & B) shall be considered.
- 23.2 In case of clash of requirement between section-C and section-D, the requirement of section-C will prevail.
- 23.3 All outdoor type handset stations, horn type speakers and other outdoor equipment shall have IP 55 degree of protection.
- 23.4 Portable handset station shall be furnished with 25m of coupling cable terminated by a plug and matching wall mounted socket receptacle.
- 23.5 Master control station shall have push button to broadcast fire alarm/ emergency.
- 23.6 Following to be furnished with the technical bid in addition to those specified in Section D:
- 23.6.1 Make and experience list of the offered system.
- 23.6.2 Descriptive literature / catalogues
- 23.6.3 Write-up on system offered.
- 23.6.4 unpriced "Price Schedule" of all equipment and services, as per Annexure-1(A & B)
- 23.7 DOCUMENTS TO BE FURNISHED BY THE SUCCESSFUL BIDDER in addition to those specified in Section D. GA Drawings with applicable technical details and other drawings/documents as per attached drawing schedule (Annexure 4) shall be furnished within 3 weeks after award of contract.

**ANNEXURE-1(A)**

**2X660 MW SURATGARH STPS. UNIT # 7 & 8 - Bill of Quantity for Main Items for Public Address System**

Item No.	DESCRIPTION	MAKE	MODEL NO.	QUANTITY	Unit	SUPPLY (Rs)		Remarks
						Unit Ex-works	Total Ex-works	
(A)	<b>MAIN EQUIPMENT</b>							
1	Central exchange for unit & common area with integrated MDF Microprocessor controlled, digital, programmable central control unit (CCU) equipped for 215 stations.			1	No.			
2	Central exchange for CHP area with integrated MDF Microprocessor controlled, digital, programmable central control unit (CCU) equipped for 80 stations.			1	No.			
3	Master Control Station (MCS) Built-in mic & speaker, LCD display, handset			5	Nos.			
4	Flame proof handset station			5	Nos.			
5	Flame proof horn type speaker			5	Nos.			
6	Desktop Station Built-in mic & speaker, LCD display, handset			34	Nos.			
7	Extension amplifier for MCS, FMS and desktop station			44	Nos.			
8	Wall/column mounted, weatherproof field call station with handset and built-in power amplifier with 15W (RMS)			239	Nos.			
9	Wall/column mounted, weatherproof field call station with handset and built-in power amplifier with 15W (RMS) in pilfer proof enclosure			8	Nos.			
10	Sub-distribution frame (SDF) 24 pairs *			15	Nos.			
11	Portable handset station with multi-pin plug and 25 meter wire			5	Nos.			
12	Socket box for Portable handset station			20	Nos.			
13	Wall/ column mounted 4W Cone type loudspeaker			152	Nos.			
14	Wall/ column mounted 15W Horn type loudspeaker			121	Nos.			
15	Power junction box			290	Nos.			
16	Signal junction box			37	Nos.			
17	Weather protecting canopy for field call station			121	Nos.			
18	Sound protecting floor mounted Acoustic hood			20	Nos.			
19	Power distribution box			2	Nos.			
20	Signal line booster *			10	No			
21	Special tools and tackles			1	lot			
22	Additional Items required for the completeness of system			1	lot			

**NOTES:**

1. Bidder must indicate the **make & model number** of each item else the offer can not be evaluated.
2. The unit rates of supply for all equipment quoted by the bidder shall be firm for a variation of quantities limited to:
  - a)  $\pm 20\%$  of total order value till finalization of engineering details & BOQ.
  - b)  $+10\%$  of the total order value in addition to (a) above, till the completion of job.
3. Design and engineering charges shall form part of main equipment.
4. Charges for special tools & tackles required for the PA system shall form part of main equipment.
5. Main equipment items, which are not applicable for their system, bidder to mention in "Remarks" column and same shall appear in the unpriced copy of the bid also.
6. Any additional item/equipment required (as per system quoted by the bidder), bidder shall quote it separately with their unit rate.
7. \* Bidder shall quote either SCHEME I or SCHEME II. Whichever is not applicable Bidder shall write N/A in front of that item.


## ANNEXURE-1 (B)

### 2X660 MW SURATGARH STPS, UNIT # 7 & 8 - Price Schedule E & C for Public Address System

Item No.	DESCRIPTION	QUANTITY	Unit	E & C(Rs)		Remarks
				Unit	Total	
(B)	<u>ERECTION &amp; COMMISSIONING</u>					
1	Central exchange for unit & common area with integrated MDF Microprocessor controlled, digital, programmable central control unit (CCU) equipped for 215 stations.	1	No.			
2	Central exchange for CHP area with integrated MDF Microprocessor controlled, digital, programmable central control unit (CCU) equipped for 80 stations.	1	No.			
3	Master Control Station (MCS) Built-in mic & speaker, LCD display, handset	5	Nos.			
4	Flame proof handset station	5	Nos.			
5	Flame proof horn type speaker	5	Nos.			
6	Desktop Station Built-in mic & speaker, LCD display, handset	34	Nos.			
7	Extension amplifier for MCS, FMS and desktop station	44	Nos.			
8	Wall/column mounted, weatherproof field call station with handset and built-in power amplifier with 15W (RMS)	239	Nos.			
9	Wall/column mounted, weatherproof field call station with handset and built-in power amplifier with 15W (RMS) in pilfer proof encloser	8	Nos.			
10	Sub-distribution frame (SDF) 24 pairs *	15	Nos.			
11	Portable handset station with multi-pin plug and 25 meter wire	5	Nos.			
12	Socket box for Portable handset station	20				
13	Wall/ column mounted 4W Cone type loudspeaker	152	Nos.			
14	Wall/ column mounted 15W Horn type loudspeaker	121	Nos.			
15	Power junction box	290	Nos.			
16	Signal junction box	37	Nos.			
17	Weather protecting canopy for field call station	121	Nos.			
18	Sound protecting floor mounted Acoustic hood	20	Nos.			
19	Power distribution box	2	Nos.			
20	Signal line booster *	10	No			
21	Special tools and tackles	1	lot			
22	Additional Items required for the completeness of system	1	lot			

**NOTES:**

1. The unit rates of E&C for all equipment quoted by the bidder shall be firm for a variation of quantities limited to:
  - a)  $\pm 20\%$  of total order value till finalization of engineering details & BOQ.
  - b)  $+10\%$  of the total order value in addition to (a) above, till the completion of job.
2. Fabrication & painting of support structure for various equipment shall be in bidders scope. However, structural steel will be free issue from BHEL.
3. E & C spares required shall form part of erection & commissioning charges.
4. Instruments required for testing & commissioning shall be arranged by the bidder.
5. Cables laying is not in the scope of the bidder (except the local cable from JB to station). However, termination of cables on bidder's equipment is in bidder's scope.
- 6 . . \* Bidder shall quote either SCHEME I or SCHEME II. Whichever is not applicable Bidder shall write N/A in front of that item.

	TITLE	SPECIFICATION NO.	PE-TS-392-557-E-001		
	<b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet A</b>	VOLUME	IIB		
		SECTION	C		
		REV	00	DATE	10/12/2014
		SHEET	1	OF	2

S No.	Description	Unit	Data (□ - not applicable / ■ - applicable)
<b>1.0</b>	<b>SYSTEM DESIGN DATA</b>		
1.1	Design ambient temperature	°C	50
1.2	Relative humidity		
a)	Average	%	refer project information
b)	Maximum	%	refer project information
<b>2.0</b>	<b>POWER SUPPLY</b>		
2.1	AC Normal Supply		
i.	Rated voltage	V	240V AC
ii.	Rated frequency	Hz	50Hz
iii.	Voltage variation	%	±10%
iv.	Frequency variation	%	±5%
v.	Combined voltage & frequency variation (sum of absolutes)	%	10%
2.2	AC UPS		
i.	Rated voltage	V	230V AC
ii.	Rated frequency	Hz	50Hz
iii.	Voltage variation	%	±10%
iv.	Frequency variation	%	±5%
v.	Combined voltage & frequency variation (sum of absolutes)	%	10%
<b>3.0</b>	<b>EARTHING</b>		
3.1	Type		
3.2	Size	mm	
3.3	Type of power cable for earthing		□ Additional core ■ GI wire
<b>4.0</b>	<b>SYSTEM REQUIREMENTS</b>		
4.1	Frequency response	Hz	400-6000Hz (±3 dB)
<b>5.0</b>	<b>CENTRAL EXCHANGE</b>		
5.1	Capacity (Main area & CHP area)	Lines	As per Annexure-A
5.2	Frequency response	Hz	200 -10000Hz (±10 dB)
5.3	Rated voltage / frequency		230V 50Hz AC UPS
5.4	Central Exchange Interior and exterior paint		Grey RAL 7032/Glossy white
5.5	Any misc. item		Integrated MDF/MDB
5.6	Degree of protection		IP-42
5.7	Material		MS, 2mm thick minimum
<b>6.0</b>	<b>MASTER / DESK TOP STATION</b>		
6.1	Type of protection		Electronic circuit protection
6.2	Material		ABS plastic
6.3	Colour		As per manufacturer's standard practice
6.4	Degree of protection		IP-42 for MCD and IP-52 for DS
<b>7.0</b>	<b>HAND SET STATION</b>		
7.1	Gain	dB	50 dB
7.2	Microphone		
	Type		Noise cancelling type
	Frequency response	Hz	200- 7000Hz (±3 dB)
7.3	Receiver type		High efficiency dynamic type
7.4	Enclosure material, thickness		■ Al (3 mm) ■ FRP (4 mm) ■ PVC (3 mm)
7.5	Degree of protection		IP55



TITLE

**PUBLIC ADDRESS SYSTEM**  
**Datasheet A**

SPECIFICATION NO. PE-TS-392-557-E-001


VOLUME IIB

SECTION C

REV 00 DATE 10/12/2014

SHEET 2 OF 2

S No.	Description	Unit	Data ( <input type="checkbox"/> - not applicable / <input checked="" type="checkbox"/> - applicable)
7.6	Paint shade		As per manufacturer's standard practice
7.7	Type of mounting		Wall / column mounting
7.8	Canopy		<input checked="" type="checkbox"/> YES
<b>8.0</b>	<b>AMPLIFIER</b>		
8.1	Class		Class-B push-pull type
8.2	Frequency response	Hz	200 -10000 Hz ( $\pm 3$ dB)
8.3	Total harmonic distribution at 1000 Hz	%	Less than or equal to 1%
8.4	Signal to noise ratio	dB	50dB(min)
8.5	Supply voltage	Volt	230 V AC
8.6	Enclosure material, thickness		Aluminium, 3 mm
8.7	Degree of protection		IP-55
8.8	Paint shade		As per manufacturer's standard practice
<b>9.0</b>	<b>HORN TYPE LOUD SPEAKER</b>		
9.1	Power Handling capacity	Watts	15 watts (rms) minimum
9.2	Frequency response	Hz	500-4500 Hz ( $\pm 3$ dB)
9.3	Sound pressure level at 1k Hz at 1Mtr	dB	102 Db (min)
9.4	Bell diameter		10 inch minimum
9.5	Enclosure material		18 SWG Aluminium (Spin)
9.6	Degree of protection		IP-55
9.7	Paint shade		As per manufacturer's standard practice
<b>10.0</b>	<b>CONE TYPE LOUD SPEAKER</b>		
10.1	Power Handling capacity	Watts	4 watts (rms) minimum
10.2	Frequency response	Hz	200-7000 Hz ( $\pm 3$ dB)
10.3	Sound pressure level at 1k Hz at 1Mtr	dB	84 dB (min)
10.4	Enclosure material		16 SWG MS sheet (Spin)
10.5	Degree of protection		IP-55
10.6	Paint shade for all areas		As per manufacturer's standard practice
10.7	Paint shade for CCR/EER		As per manufacturer's standard practice
<b>11.0</b>	<b>JUNCTION BOX(POWER/SIGNAL)</b>		
11.1	Degree of protection		IP- 55
11.2	Enclosure material & thickness		<input checked="" type="checkbox"/> polycarbonate <input checked="" type="checkbox"/> Di-cast aluminium <input checked="" type="checkbox"/> FRP
11.3	Paint shade		As per manufacturer's standard practice
<b>12.0</b>	<b>POWER DISTRIBUTION BOX</b>		
12.1	Capacity		2 inputs( Auto change over switch) & 12 outputs
12.2	Enclosure material		16 SWG MS Sheet
12.3	Degree of protection		IP-55
12.4	Paint shade		As per manufacturer's standard practice
12.5	Paint finish		Powder coated, textured
12.6	MCB provided		<input checked="" type="checkbox"/> YES <input type="checkbox"/> No
<b>13.0</b>	<b>Signal Loop Length</b>		
13.1	Unit area	km	4
13.2	CHP/LHS area	km	8
13.3	Common area	km	7

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :C
		Rev. : 00
		Page : 1 of 1

## ANNEXURE-2



DOCUMENT TITLE

**PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-TS-392-557-E001

VOLUME II B

SECTION - C

REVISION 01


DATE: 10/12/2014

SHEET 1 OF 1

2 X 660 MW SURATGARH STPS STAGE V  
DRAWING & DOCUMENT DISTRIBUTION

S.NO.	DESCRIPTION	NOS.(HARD COPY)	SOFT COPY IN AUTOCAD & PDF	CD ROM
1.	All Drgs./docs.- First submission/resubmission	2	YES	-
2.	Final Drgs./docs. after approval for distribution purpose	20	YES	4
3.	As built drgs./docs.	20	YES	4
4.	Quality plan –submission/	2	YES	-
5	Quality plan- after approval for distribution purpose	20	YES	4
6.	Instruction Manual (Erection,/O&M), commissioning procedure, Data Books/Plant hands book/ CATALOGUES etc.	15	YES	
6(a)	Draft copy	2	-	-
6(b)	Final submission	20	YES	4
7.	TYPE TEST CERTIFICATES	10	YES	4
8.	Performance & Guarantee Test Report	10	YES	4


\* Applicable for vendor drawings

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :C
		Rev. : 00
		Page : 1 of 1

## ANNEXURE-3 BLOCK DIAGRAM



OUTDOOR WALL MOUNTED STATION  
STATION WITH ACOUSTIC HOOD

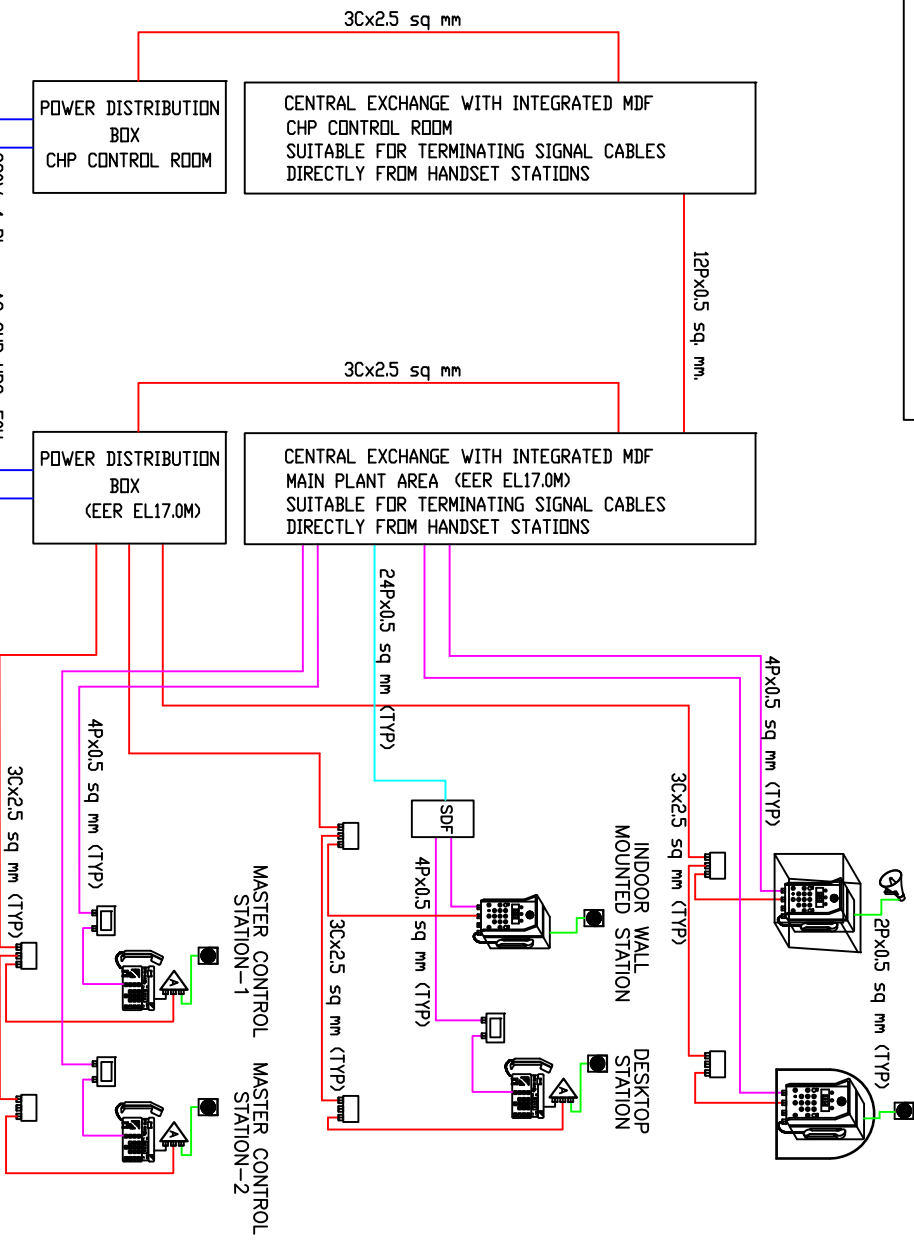

**NOTE:**  
1. SIMILAR CABLE & STATIONS CONNECTION WILL BE FOLLOWED FOR CHP EXCHANGE ALSO.

LEGEND	DESCRIPTION
	AMPLIFIER FOR DESK TOP STATION
	SDF 20 PAIR
	POWER JIB
	SIGNAL JIB FOR DESKTOP, FLUSH MOUNTED STATION & MASTER CONTROL STATION
	CONE TYPE SPEAKER
	HORN TYPE SPEAKER
	DESK MOUNTED / FLUSH MOUNTED & MASTER CONTROL STATION
	FIELD STATION WITH ACOUSTIC HOOD
	FIELD STATION WITH CANOPY

MDF : MAIN DISTRIBUTION FRAME  
SDF : SUB DISTRIBUTION FRAME

CUSTOMER	RAJASTHAN RAYYA VIDYUT UTPADAN NIGAM LTD.			
CUSTOMER'S CONSULTANT	TATA CONSULTING ENGINEERS LIMITED MUMBAI			
JOB No.	392			
STATUS	CONTRACT			
DISTRIBUTION				
REV	DATE	ALTD	CHD	APPD
01	08/08/13			

**RAJASTHAN RAYYA VIDYUT UTPADAN NIGAM LTD.**  
2 X 660 MW SUPER CRITICAL TPS, STAGE-V, UNITS # 7 & 8 AT SURATGARH, RAJASTHAN

**TATA CONSULTING ENGINEERS LIMITED**  
MUMBAI

**2 X 660 MW SUPER CRITICAL TPS**  
(SURATGARH, STAGE-V, UNIT # 7 & 8)


REV	DATE	ALTD	CHD	APPD

DEPT	CODE	NAME	SIGN	DATE
DRN	MS		-SD-	20.05.2013
DESIGN	MS		-SD-	20.05.2013
CHD	AA		-SD-	20.05.2013
APPD	SKG		-SD-	20.05.2013

REV	DATE	ALTD	CHD	APPD

HRP	CAI	HSE	MAUX	ELEC	CIVIL	DEPT	SCALE	DRAWING No.
							1:4500	PE-DG-392-557-E002


PUBLIC ADDRESS SYSTEM ZONES & THEIR INTERCONNECTIONS

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :C
		Rev. : 00
		Page : 1 of 1

## ANNEXURE-4

**ANNEXURE-4****2X660 MW SURATGARH STPS UNIT# 7 & 8 - PA SYSTEM [LIST OF DOCUMENTS & NUMBERING]**

<b>Sl.No</b>	<b>BHEL DRAWING NO.</b>	<b>TITLE</b>
1	PE-V0-392-557-E001	DATA SHEET FOR PA SYSTEM
2	PE-V0-392-557-E002	SYSTEM DESCRIPTION WITH CABLES & EARTHING DETAILS
3	PE-V0-392-557-E003	PA SYSTEM O&M MANUAL
1	PE-V0-392-557-E101	GA OF CENTRAL EXCHANGE FOR UNIT & COMMON AREA
2	PE-V0-392-557-E102	GA OF CENTRAL EXCHANGE FOR CHP AREA
3	PE-V0-392-557-E103	GA OF DESKTOP MOUNTED STATION
4	PE-V0-392-557-E104	GA OF MASTER CONTROL STATION
5	PE-V0-392-557-E105	GA OF FLUSH MOUNTED STATION
6	PE-V0-392-557-E106	GA OF FLUSH MOUNTED STATION (IN PILFER PROOF ENCLOSER)
7	PE-V0-392-557-E107	GA OF FIELD STATION
8	PE-V0-392-557-E108	GA OF PORTABLE STATION
9	PE-V0-392-557-E109	GA OF SOCKET FOR PORTABLE STATION
10	PE-V0-392-557-E110	GA OF 4W CONE TYPE LOUD SPEAKER
11	PE-V0-392-557-E111	GA OF 15W HORN TYPE LOUD SPEAKER
12	PE-V0-392-557-E112	GA OF MAIN DISTRIBUTION FRAME (MDF) 200 PAIRS
13	PE-V0-392-557-E113	GA OF SUB DISTRIBUTION FRAME (SDF) 24 PAIRS
14	PE-V0-392-557-E114	GA OF EXTENSION AMPLIFIER
15	PE-V0-392-557-E115	GA OF SOUND PROTECTING (ACOUSTIC) HOOD
16	PE-V0-392-557-E116	GA OF CANOPY FOR FIELD STATION
17	PE-V0-392-557-E117	GA OF POWER DISTRIBUTION BOX
18	PE-V0-392-557-E118	GA OF POWER JUNCTION BOX
19	PE-V0-392-557-E119	GA OF SIGNAL BOX
20	PE-V0-392-557-E120	GA MOUNTING ARRANGEMENT DWG
1	PE-V0-392-557-E201	QUALITY PLAN FOR PA SYSTEM
1	PE-V0-392-557-E301	BLOCK DIAGRAM FOR PA SYSTEM
2	PE-V0-392-557-E302	INTERCONNECTION DIAGRAM FOR PA SYSTEM
3	PE-V0-392-557-E303	CABLE LISTING FOR PA SYSTEM
1	PE-V0-392-557-E401	TYPE TEST PROCEDURES FOR PA SYSTEM
2	PE-V0-392-557-E402	TYPE TEST REPORTS FOR PA SYSTEM

	<b>RAJASTHAN RAJYA VIDYUT UTPADAN NIGAM LTD</b> <b>2 X 660 MW SURATGARH STPS, STAGE-V</b>	Doc. No PE-TS-392-557-E001
		Volume: IIB
<b>TECHNICAL SPECIFICATION FOR PUBLIC ADDRESS SYSTEM</b>		Section :C
		Rev. : 00
		Page : 1 of 1

## ANNEXURE-5 QUALITY PLAN



SHEET 1 OF 3		SYSTEM : COMMUNICATION			ITEM : PUBLIC ADDRESS SYSTEM			DOC. NO. :				
SL. NO.	COMPONENT/OPERATION	CHARACTERISTICS CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY			REMARKS
									P	W	V	
1	2	3	4	5	6	7	8	9	10	11	11	
1.0	CENTRAL EXCHANGE	1. AESTHETIC	MA	VISUAL	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	BHEL witness voltage level at minimum 5 points randomly.
		2. MECHANICAL	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		3 SHEET THICKNESS	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG.	INSP. REPT.	3/2	1	1	
		4. ELECTRICAL -Rated input voltage -Rated output voltage	MA	ELECTRICAL	100%	APPD. TP	APPD. TP	INSP. REPT.	3/2	1	1	
1.1	ELECTRONIC MODULE	1. Burn in test at 50 °C for 48 hours in energised condition.	MA	ELECTRICAL	100%	APPD. TP	APPD. TP	INSP. REPT.	3/2	2	1	
2.0	MASTER CONTROL STATION (MCS)	1. AESTHETIC	MA	VISUAL	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		2. MECHANICAL	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		3 THICKNESS	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG.	INSP. REPT.	3/2	1	1	
		4. ELECTRICAL -Input impedance at 1KHz -THD at 1 KHz. -Frequency Response -Signal to Noise Ratio	MA	ELECTRICAL	100%	APPD. TP APPD. DATASHEET	APPD. TP APPD. DATASHEET	INSP. REPT.	3/2	1	1	
2.1	ELECTRONIC MODULE	1. Burn in test at 50 °C for 48 hours in energised condition.	MA	ELECTRICAL	100%	APPD. TP	APPD. TP	INSP. REPT.	3/2	2	1	
BHEL			PARTICULARS			BIDDER/VENDOR						
			NAME									
			SIGNATURE									
			DATE						BIDDER'S/VENDORS COMPANY SEAL			

LEGEND : 1 - BHEL/ CUSTOMER 2 - VENDOR 3 - SUB- VENDOR P - PERFORM W - WITNESS V - VERIFICATION



QUALITY PLAN

CUSTOMER:

PROJECT TITLE: 2X660 MW SURATGARH STPS

SPECIFICATION NO : PE-TS-392-557-E-001

BIDDER/ VENDOR :

STANDARD QP NO. : PE-QP-999-557-E001, REV. 0

SPECIFICATION TITLE:

SHEET 2 OF 3

SYSTEM : COMMUNICATION

ITEM : PUBLIC ADDRESS SYSTEM

DOC. NO. :

SL. NO.	COMPONENT/OPERATION	CHARACTERISTICS CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY			REMARKS
									P	W	V	
1	2	3	4	5	6	7	8	9	10			11
3.0	CONE TYPE SPEAKER, HORN LOUD SPEAKER	1. AESTHETIC	MA	VISUAL	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	BHEL witness on 5% sample (min 5) selected at random of each type per Lot.
		2. MECHANICAL	MA	DIM.	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		3 THICKNESS	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG.	INSP. REPT.	3/2	1	1	
		4. ELECTRICAL -DC Resistance	MA	ELECTRICAL	100%	IS 9302 Part IV APPD. TP	APPD. DATA SHEET APPD. TP	INSP. REPT.	3/2	1	1	
		5. FUNCTIONAL TEST - SPL at rated output - Sweep test response	MA	ELECTRICAL	100%	IS 9302 Part IV APPD. TP	APPD. DATA SHEET APPD. TP	INSP. REPT.	3/2	1	1	
4.0	FIELD CALL STATION, PORTABLE STATION, DESKTOP STATION & FLUSH MOUNTED STATION (AS APPLICABLE)	1. AESTHETIC	MA	VISUAL	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	BHEL witness on 5% sample (min 5) selected at random of each type per Lot.
		2. MECHANICAL	MA	DIM.	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		3 THICKNESS	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG.	INSP. REPT.	3/2	1	1	
		4. ELECTRICAL -THD at 1 KHz. -Frequency Response -Signal to Noise Ratio -Input impd. at 1 KHz	MA	ELECTRICAL	100%	APPD. DATASHEET APPD. TP	APPD. DATA SHEET APPD. TP	INSP. REPT.	3/2	1	1	
5.0	EXTENSION AMPLIFIER	1. AESTHETIC	MA	VISUAL	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	BHEL witness on 10% sample (min 3) selected at random.
		2. MECHANICAL	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG. INSP. REPT.	INSP. REPT.	3/2	1	1	
		3 THICKNESS	MA	DIMENSION	100%	APPD. DWG.	APPD. DWG.	INSP. REPT.	3/2	1	1	
		4. ELECTRICAL -Input sensitivity at 1KHz -Rated output power -THD at 1 KHz -Frequency Response -Signal to Noise Ratio -Input impd. at 1 KHz -IR & HV Test	MA	ELECTRICAL	100%	IS(9302) Part II APPD. TP	APPD. DATA SHEET APPD. TP	INSP. REPT.	3/2	1	1	
BHEL			PARTICULARS			BIDDER/VENDOR						
			NAME									
			SIGNATURE									
			DATE						BIDDER'S/VENDORS COMPANY SEAL			

LEGEND : 1 - BHEL/ CUSTOMER 2 - VENDOR 3 - SUB- VENDOR P - PERFORM W - WITNESS V - VERIFICATION



**QUALITY PLAN**

SHEET 3 OF 3

**CUSTOMER:**

**PROJECT TITLE:** 2X660 MW SURATGARH STPS

**SPECIFICATION NO :** PE-TS-392-557-E-001

**BIDDER/ VENDOR :**

**STANDARD QP NO. :** PE-QP-999-557-E001, REV. 0

**SPECIFICATION TITLE:**

**SYSTEM :** COMMUNICATION

**ITEM :** PUBLIC ADDRESS SYSTEM

**DOC. NO. :**

SL. NO.	COMPONENT/OPERATION	CHARACTERISTICS CHECK	CAT.	TYPE/METHOD OF CHECK	EXTENT OF CHECK	REFERENCE DOCUMENT	ACCEPTANCE NORM	FORMAT OF RECORD	AGENCY			REMARKS
									P	W	V	
1	2	3	4	5	6	7	8	9	10			11
6.0	POWER DISTRIBUTION BOX, LOUD SPEAKER JB, POWER JB, SIGNAL JB, MAIN DISTRIBUTION FRAME (MDF), SUB DISTRIBUTION FRAME (SDF), SOCKET BOX FOR PORTABLE STATION	1. AESTHETIC 2. MECHANICAL 3 THICKNESS 4. HV / IR	MA MA MA MA	VISUAL DIM. DIMENSION ELECTRICAL	100% 100% 100% 100%	APPD. DWG. APPD. DWG. APPD. DWG. APPD. TP	APPD. DWG. APPD. DWG. APPD. DWG. APPD. DATA SHEET	INSP. REPT. INSP. REPT. INSP. REPT. INSP. REPT.	3/2 3/2 3/2 3/2	1 1 1 1	1 1 1 1	BHEL witness on 5% sample selected at random of each type per Lot.
7.0	WEATHER PROTECTING CANOPY& SOUND PROTECTING HOOD	1. AESTHETIC 2. MECHANICAL 3 THICKNESS	MA MA MA	VISUAL DIM. DIMENSION	100% 100% 100%	APPD. DWG. APPD. DWG. APPD. DWG.	APPD. DWG. APPD. DWG. APPD. DWG.	INSP. REPT. INSP. REPT. INSP. REPT.	3/2 3/2 3/2	1 1 1	1 1 1	BHEL witness on 3% sample (min 3) selected at random of each type per Lot.
8.0	INTEGRATED TESTING ON PA SYSTEM	FUNCTION -Party call -Paging call -Busy tone -Alert tone	MA	AUDIO/ VISUAL	100%	APPD. TP	APPD. TP	INSP. REPT.	2	1	1	BHEL to witness on 5 no. of stations or min 5% connected to central exchange.
9.0	TYPE TEST (As per Annexure-A)	As per Annexure A	MA	ELECTRICAL /FUNCTIONAL	SAMPLE	Reference standard as per annexure A	Reference standard as per annexure A	REPORT	3/2	1*	1	*Refer note below
NOTE: 1. CONDUCTION OF TYPE TEST/ SUBMISSION OF AVAILABLE VALID TYPE TEST REPORTS ON PA SYSTEM EQUIPMENT SHALL BE AS PER ANNEXURE A												
BHEL			PARTICULARS			BIDDER/VENDOR						
			NAME									
			SIGNATURE									
			DATE						BIDDER'S/VENDORS COMPANY SEAL			

**LEGEND :** 1 - BHEL/ CUSTOMER    2 - VENDOR    3 - SUB- VENDOR    P - PERFORM    W - WITNESS    V - VERIFICATION

## LIST OF TYPE TEST FOR PUBLIC ADDRESS SYSTEM

S No	Equipment	Type test description	Referred standard	Test to be specifically conducted (Yes/No)	BHEL/Customer's approval Req. on test certificate (Yes/No)
1	Central Exchange	• High frequency radiated magnetic field test	IEC 61000-4-3	NO	yes
		• Electrostatic discharge test	IEC 61000-4-2		
		• Susceptibility test	IEC 61000-4-6		
		• Vibration test	IEC 60068-2-6		
		• Dry heat & damp heat test	IEC 60068-2-2 & IEC 60068-2-30		
		• Surge protection test	IEC 61000-4-5		
2	Field call stations, Junction box, power distribution box, Central Exchange, Master Control station, Desktop station, Flush mounted station, MDF/MJB (if not integrated in central exchange)	DOP test (dust test & water test)	Relevant IS / IEC	NO	yes
3	Cone type speaker	Sound pressure level (SPL) before & after DOP test (dust test & water test)	Relevant IS / IEC	NO	yes
4	Horn type speaker	• Sound pressure level (SPL) before & after DOP test (dust test & water test)	Relevant IS / IEC	NO	yes
		• Frequency response test			
		• Sound pressure level (SPL) test	IS: 9302 Part- IV		
		• Impedance test			
		• Dry heat & damp heat test	IEC 60068-2-2 & IEC 60068-2-30		
5	Field Call station	• Dry heat & damp heat test	IEC 60068-2-2 & IEC 60068-2-30	NO	yes
		• Vibration test	IEC 60068-2-6		
		• Electrostatic discharge test	IEC 61000-4-2		
		• Electromagnetic immunity test	As per relevant standard		
		• Surge protection test	IEC 61000-4-5		
		• RF immunity test	As per relevant standard		
6	Amplifier	• Frequency response test • Power output test • Signal to noise ratio test • Distortion test	Relevant IS / IEC	NO	yes
7	Flameproof handset station, flameproof horn type speaker, flameproof junction box (if applicable)	Type test as per relevant IS for flameproof properties	Relevant IS	NO	yes

## ANNEXURE – 1

### INSTRUCTIONS FOR QUALITY PLAN

The Quality Plan shall include all the Quality Control Measures and Checks adopted by the Vendor to ensure that the material/component/assembly/services supplied by him meet/will meet the requirements as per specifications and good practices. They shall include all stages of operation such as materials, processes, manufacture, assembly, packing and despatch. The following guide lines may be noted:

- Column 1- Serial Number
- Column 2- Component/Operation- The component and/or operation being checked shall be given here.
- Column 3- Characteristics check- The characteristics being checked shall be given here, e.g., chemical composition, mechanical properties, leak tightness, surface defects etc..
- Column 4- Category -'CR' stands for critical characteristic - affecting safety of equipment and personnel  
'MA' stands for major Characteristic - affecting safety of equipment and personnel  
'MI' stands for minor characteristic - affecting appearance etc.
- Column 5- Type/Method of check e.g. chemical analysis tensile testing, hydraulic test, visual examination radiography etc.
- Column 6- Extent of check, such as, 100, 10, 1 percent etc.
- Column 7- Reference Documents - Documents, such as technical specification, drawings, standard specifications (IS, BS ETC.) procedure, etc. according to which check is done.
- Column 8- Acceptance Norms - Standards etc. according to which acceptability or otherwise of the characteristics being checked is decided.
- Column 9- Format of Record - Formats, log sheets, reports, etc. in which the observations are recorded. Standard log sheets, reports, formats etc. of the Vendors shall be numbered and such reference numbers shall be included here.
- Column 10- Agency - The agency which performs the test/instruction shall be written in sub-column 'W'  
The agency which verifies test certificates/inspection records and carries out audit check of the components/operation shall be written in sub-column 'V'

The agencies are codified as 1,2 & 3

'1' stands for (BHEL)

'1' \* means the operation shall be cleared by BHEL before the start of the next operation.

'2' Stands for Vendor

'3' stands for sub-Vendor of the Vendor and so on.

Example :

Entry '3' in column 'P' means test./inspection to be performed by sub-Vendor's QC

Entry '2' in column 'W' means test./inspection to be witnessed by Vendor's QC

Entry '1' in column 'V' means verification shall be done by BHEL and next stage to be started only after the hold point is cleared by BHEL

Column 11- Remarks - Any special remarks shall be given here.

NOTES :

1. In absence of correlation with the test certificate(s) (e.g. material identification) samples shall be drawn by BHEL and all tests as per relevant specifications shall be carried out in their presence or in recognized Government Laboratory.
2. When materials and components are initially identified and stamped by BHEL QS engineer, the identification marks shall be preserved till despatch. Wherever this is not possible, the identification mark shall be transferred to the components in the presence of BHEL QS Engineer unless otherwise agreed.
3. For castings and forgings integral test specimens shall be provided, When this is not possible for casting, they shall be poured in the presence of BHEL QS Engineer unless otherwise, if witnessing of test by BHEL is called for.
4. When welders qualified by reputed inspection agencies or statutory bodies are not available, qualification tests shall be conducted in the presence of BHEL QS Engineer.
5. This Quality Plan is liable to be modified as per the requirements of approved drawings and changes in technical specifications/drawings. If there are contradictions in respect of column 7 & 8 between this Quality Plan and the approved drawings specifications, the latter shall prevail.
6. Wherever inspection by BHELs Purchaser/Third Party/Statutory authorities are mandatory, this shall be complied with.
7. Inspection reports, log sheets, test reports/certificate. etc. shall be furnished to BHEL at the appropriate stages or at the time of final inspection, as required.
8. This Quality Plan is also applicable to spares, if any, under scope of supply of Vendor.
9. **The quality plan shall be submitted in minimum 4 copies with a soft copy of the same or in line with contract requirements.**

***SECTION – D***

**STANDARD SPECIFICATION  
FOR  
PA SYSTEM**



TITLE

Technical Specification  
for  
PUBLIC ADDRESS SYSTEM

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 1 OF 25

*PUBLIC ADDRESS SYSTEM*

*SPECIFICATION NO. PE-TS-999-557-E001, Rev. 1*



TITLE

Technical Specification  
for  
PUBLIC ADDRESS SYSTEM

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 2 OF 25

**SUPPLY**



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 3 OF 25

## CONTENTS

- 1.0 GENERAL
- 2.0 CODES AND STANDARDS
- 3.0 DESIGN REQUIREMENTS (CONCEPTUAL VIEW)
- 4.0 POWER SUPPLY AND GROUNDING
- 5.0 SYSTEM DESIGN ENGINEERING
  - 5.1 ENGINEERING INPUTS
  - 5.2 ENGINEERING OUTPUTS
- 6.0 CONSTRUCTIONAL FEATURES
  - 6.1 CENTRAL EXCHANGE
  - 6.2 MAIN DISTRIBUTION FRAME (MDF)
  - 6.3 SUB DISTRIBUTION FRAME (SDF)
  - 6.4 MAIN JUNCTION BOX (MJB)
  - 6.5 DISTRIBUTED AMPLIFYING SYSTEM
  - 6.6 HANDSET STATIONS
  - 6.7 LOUD SPEAKERS
  - 6.8 JUNCTION BOXES
  - 6.9 MAIN DISTRIBUTION BOARD (MDB)
  - 6.10 WEATHER PROTECTION CANOPY
  - 6.11 SIGNAL LOOP LENGTH
  - 6.12 CABLES AND CABLING
  - 6.13 ENCLOSURES FOR INSTRUMENTS
  - 6.14 INTERFACING WITH EXISTING EXCHANGE
  - 6.15 OTHER
  - 6.16 COMMON REQUIREMENTS OF VARIOUS EQUIPMENT OF SUPPLY
    - 6.16.1 Surface Treatment
    - 6.16.2 Labels



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 4 OF 25

6.16.3 Earthing

6.16.4 Packing

## 7.0 INSPECTION AND TESTING

## 7.1 INSPECTION

## 7.2 TESTING

7.2.1 Tests at Works

7.2.2 Site Tests

7.2.3 General Requirements of Site Testing

## 8.0 PRICES

## 9.0 PERFORMANCE GUARANTEES

## 10.0 INSTALLATION AND MAINTAINANCE MANUAL

## 11.0 DOCUMENTATION

11.1 DOCUMENTS TO BE FURNISHED WITH THE BID

11.2 DOCUMENTS TO BE FURNISHED BY THE SUCCESSFUL  
BIDDER ALONG WITH DATA SHEET C11.3 DOCUMENTS TO BE FURNISHED BY THE VENDOR DURING  
DETAILED ENGINEERING STAGE



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 5 OF 25

## 1.0 GENERAL

- 1.1 The scope of this specification covers engineering, design, manufacturing, inspection & testing at works, packing, supply, delivery, unloading and handling at site of Public Address System for efficient and trouble free operation after installing the same at site.
- 1.2 Engineering: The “Engineering” shall broadly cover the detailed design of PA System as per the requirements of this specification, selection of equipment, materials, estimation of quantities etc. and preparation of all drawings necessary for the erection of the system. Complete engineering shall be as per the guidelines of purchaser and shall be subject to the approval.
- 1.3 It is not the intent to specify complete details of design and construction of equipment. However, the equipment shall conform in all respects to acceptable standards of design, engineering and workmanship and shall be capable of performing the required duties in a manner acceptable to purchaser, who shall be entitled to reject any work or materials, which in his opinion is not in conformity with the duty requirements.
- 1.4 Review of the bidder’s documents by the purchaser shall not relieve the bidder from his responsibility for the design and supply.
- 1.5 The Bidder shall guarantee satisfactory performance of the equipment under stipulated variations of voltage and frequency. The design and manufacture shall be such that equipments/components of same type and rating shall be interchangeable.
- 1.6 Bill of Quantities is enclosed in Section C.
- 1.7 Exclusions: Unless mentioned otherwise in Section C,  
 1.7.1 Civil foundations of central exchange, main distribution frames, main distribution boards & civil works like foundations and cable trenches are excluded from the scope of bidder.  
 1.7.2 Supply of Armoured/ unarmoured power cables, screened control cables  
 1.7.3 laying of cables, conduits and grounding materials
- 1.8 In case of any deviation, the bidder shall indicate the same clause-by-clause in the enclosed “Schedule of Deviations”. In the absence of duly filled schedule it will be construed that the bid conforms strictly to the specification.

## 2.0 CODES AND STANDARDS

- 2.1 The equipment covered under this specification shall be designed, constructed and tested in accordance with latest revisions of applicable codes/ standards.
- 2.2 The equipments furnished under this specification shall conform to the latest revisions of the following standards.
- |         |  |
|---------|--|
| IS10426 | PA System amplifiers-recommendations for minimum performance requirements and PA System amplifiers-recommendations for general requirements. |
| IS1882  | PA system-code of practice for out door installations.   |
| IS1881  | Indoor amplifying and sound reinforcement system-code of practice for installation.  |
| IS1031  | Method of measurements on loudspeaker and loud speakers systems.   |
| IS2382  | Recommended mounting dimensions of loud speakers.  |



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 6 OF 25

- IS9302 Characteristics and Methods of Measurement for sound System equipment.
- IS616 Code of safety requirement for mains operated electronic and related apparatus.
- IS7741 Specification for loudspeaker.
- IS13947 Degrees of protection provided by enclosures for low voltage switchgear and control gear.
- IS9537 Specification for conduits for Electrical (Part-I, II) installation/wiring

Equivalent IEC in lies of IS are also acceptable.

The system shall be adequately protected from signal and power line noise and meet the Surge Withstand Capability (SWC) requirements of ANSI C37.90 A/IEEE standard 472-1989 equivalent.

### 3.0 DESIGN REQUIREMENTS (CONCEPTUAL VIEW)

- 3.1 The PA system shall essentially comprise of a number of communication handset stations each of which will be provided with a telephone handset, amplifier, hook micro-switch (if provided, will be spring return to normal type), loudspeaker muting switch (spring return to normal or push button type Volume control, any other associated equipment and the loud speaker.
- 3.2 The PA system shall be of two channel open type having facilities for simultaneous communication on two modes namely 'PAGING' and 'PRIVATE' without any interference.
- 3.3 On the PAGING MODE, conversation shall be heard over the loud speakers for all to hear and this shall normally be used to locate people and also to convey messages of general nature.
- 3.4 On the PRIVATE MODE, conversation shall not be heard over the loud speakers, but it shall be carried over the telephone handsets. This mode shall be used for actual conversation, exchange of information and issue of specific instructions.

### 3.5 ZONE WISE DISTRIBUTION OF SYSTEM

The central exchange type PA system shall comprise of a number of separate zones as specified in section-C. The various zones shall be connected with a central exchange to be located In Control room/Control Equipment room. There will be a corresponding number of master control stations. Each zone shall have number of subscriber stations. Each station can do conversation with other stations and with master control station.

### 3.6 Communication within a zone

- 3.6.1 It shall be possible to make a paging call by lifting the hand set hook switch / hand free mode by pressing the page switch on all call / selected group basis. This shall initiate a call attention tone to be transmitted to all the speakers and gets off automatically after a preset time. The paging message shall then be transmitted over all the loudspeakers when the paging person shall speak in the microphone of the handset. While paging under this channel it shall be possible to mute the loudspeaker near the paging handset to eliminate the acoustic feed back. The page switch shall then be released to allow the paged person to come to the nearest hand set station. After lifting the handset off the hook of the nearest handset station it shall be possible for the paged persons to carry on the conversation on the private mode with the party. The system shall have the conference facility in either of the channels by any no. of persons by simply lifting the handset off the hook and selecting the required channel \_



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b>	PE-SS-999-557-E001
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	7    OF    25

3.6.2 The system shall have minimum following features:

- Normal call- Communication between two handsets within(ref S.N. 3.4 Above)
- Paging\_ -Ref S.N. 3.3 above
- All call- All the field stations terminated on the MCD can be contacted by using this feature. Group call- More than two handsets should be able to join the conversation
- Priority call- Reset feature on MCD, using this feature an existing conversation can be superseded for making any emergency announcement
- Interfacing facility with existing PA system/EPBAX System

3.6.3 Unless requested to be routed through the central exchange, announcements/ communication within a zone shall not be audible in other zones.

3.7 Interzone communication

3.7.1 Each of the zones shall be connected to a central exchange.

3.7.2 For sub-zones of zone, all the communication facilities like paging and party mode communication as described above between the two sub-zones shall be possible as if any have now become a single zone.

3.7.3 It shall be possible to communicate from a station in one zone to another station of different zone through a master control unit to be located on unit control desk. Another master control unit, in parallel with earlier ones, shall be located in shift incharge room. Further, suitable interface with telephone exchange (existing/new) shall be provided so that it shall be possible to communicate with any station in any zone through master control unit from any telephone set. The central exchange shall have the capacity of future expansion in number of stations, as specified in section-C. diagnostic facility of individual equipment shall be provided.

4.0 **POWER SUPPLY AND GROUNDING**

4.1 Unless specified otherwise in Data Sheet-A, the system shall be suitable for operation from 240V AC 1-phase UPS supply. There will be two feeders of 240V AC 1-phase UPS supply. In event of failure of one UPS supply, it will switch automatically to another UPS supply.

4.2 All panels, desks, cabinet shall be provided with a continuous bare copper ground bus. The ground bus shall be bolted / welded to the panel structure and efficiently ground the entire structure.

4.3 If microprocessor control, monitoring and information system or backup control system requires its own unique and isolated grounding requirements, then these requirement should be clearly stated and shall be provided, so as to ensure proper operation of the above mentioned system.

4.4 Connections of cables and changeover facility for power supply connections shall be the scope of the vendor.

5.0 **SYSTEM DESIGN ENGINEERING**



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b> PE-SS-999-557-E001	
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	8 OF 25

5.1 **ENGINEERING INPUTS:** Complete engineering shall be done by the vendor on the basis of following documents to be furnished by purchaser:

- a) Area wise allocation of handsets & loudspeakers and their type.
- b) Layout drawings of areas.

5.2 **ENGINEERING OUTPUTS:** Vendor shall prepare and submit following documents and drawings for purchaser's approval:

- a) Technical write-up (system Description).
- b) Bill of quantities for all items.
- c) GA drawing cum technical datasheet of all the equipments as per BOQ.
- d) Mounting arrangement drawings.
- e) Interconnection diagram showing the interconnection among Main Distribution Box, Master Handset Station, JBs, Handsets, Loud Speakers and also covering the sizes of cable.
- f) Conductor sizes of cables and wires with voltage drop calculations.
- g) Cable schedule.
- h) Testing and commissioning guidelines
- i) O& M Manuals
- j) Type test report
- k) Test procedure if required

## 6.0 CONSTRUCTIONAL FEATURES

Public Address system shall comprise of central exchange, Handset stations, master control stations along with their associated distributed amplifier and loud speakers, Main distribution box/Junction box, a number of communication handset stations along with their associated loud speakers and other associated equipment. Details of each of these and other items required to make the system complete are furnished below.

### 6.1 CENTRAL EXCHANGE

Microprocessor controlled electronic exchange unit is stored programme controlled (SPC) unit with distributive processing. Switching shall be fully digital using Time Division Multiplexing (TDM) and Pulse Amplitude Modulation (PAM)/Space switching technique. The fully digital switching provides higher number of simultaneous communication links, better reliability, advanced features with no cross talk and other problems related to conventional systems.

The electronic exchange is a central control unit (CCU) comprising of rack, power supply arrangement, and control processors with control wiring. In the CCU, microprocessor controls the operation and power supplies of the system. Central Exchange shall have modular type construction for the purpose of easy expansion, maintenance, operation and fault detection. The racks are the modular mechanical structures mounted in a cabinet.

Central exchange shall be wide band microprocessor based modular design. This exchange shall consist of all the necessary control hardware, required for operation, monitoring, protection, indication, switching, testing, measurement of all the voltages and load conditions of the entire system, facility for checking of the operation of all the stations and quality of speech from the master control units etc. All the card etc. shall be plug in type. Solder less termination shall be provided for every wiring. Systems bandwidth shall be at least 200-10 kHz ( $\pm 10$  dB) and shall not alter frequency response of the open line system. The various oscillators for the ring tone, all tones shall be mounted inside the exchange and shall be complete in all respects. The central exchange shall be enclosed in a freestanding cabinet to be located in control equipment room all the cable entries shall be from bottom only. The working of the



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b>	PE-SS-999-557-E001
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	9    OF    25

system shall be noiseless such that the same can be installed in the office area.

Further, all the programming tools that will be required to program/reprogram the system shall also be provided.

Unless otherwise specified in Section C, Main Distribution Frame (MDF) /MJB as specified below at 6.2 shall form part of the central exchange cabinet ie Central exchange shall be suitable for terminating signal cables directly from Handset stations.

#### **SCHEME I:**

##### **6.2 MAIN DISTRIBUTION FRAME (MDF)**

6.2.1 The main distribution frame (MDF) shall consist of two sides. On one side the cables from exchange equipment shall be brought and terminated, on the other side the cables from extension stations are brought and terminated. Thus providing interconnections through jumper wires. The MDF connectors shall have screwless cage clamp (WAGO) type terminals.

6.2.2 The MDF shall be suitable for wall/floor mounting and shall be flexible by way of connecting any extension line to any other exchange line.

6.2.3 The MDF shall be complete with fuse mountings and shall be fitted with delayed action fused on the extension side. It shall be complete with requisite number of test jack assemblies on the exchange side.

6.2.4 The MDF shall be dust proof and shall be suitable for floor/ wall mounting along with all facilities and hardwares. The mounting shall be done by means of nuts and rawl plug of appropriated size. Degree of protection shall be IP-55.

##### **6.3 SUB-DISTRIBUTION FRAME (SDF)**

6.3.1 The sub-distribution frame (SDF) shall be of 24 pairs with screwless cage clamp (WAGO) type terminals module. SDF shall be of minimum 14 SWG MS sheet enclosed over suitable angle iron framework with base channel, pedestal etc as required for outdoor installation with flush/wall mounting arrangement. Degree of protection shall be IP-55.

#### **SCHEME II :**

##### **6.4 MAIN JUNCTION BOX**

6.4.1 Main Junction Box shall have provision for cable termination for looping of handsets. Handsets with in zone are connected in serial connection and will be terminated to MJB. The MJB will establish link between handsets and central exchange.

Maximum 10 No's handset can be connected in one serial connection of MJB with limitation upto 1.5Km loop length exceeding which signal line booster shall be provided.

##### **6.5 DISTRIBUTED AMPLIFYING SYSTEM**

The amplifier system shall be distributed type i.e. each handset station/ loudspeaker shall have its own preamplifier, line amplifiers (wherever required, shall be provided for long line signal transmission) and power amplifiers to suit the loudspeaker capacity. The system shall be as below:

a) Unit amplifying system shall be designed to deliver the wattage of connected load in the unit system.

b) The amplifiers shall be designed for high quality amplification. The amplifiers shall be class-B



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 10 OF 25

push-  
pull type as per IS616, IS10426 or equivalent and the range of frequency response shall not make the amplifiers liable to pick up low and high frequency noise which might disturb the original speech

reproduction. Frequency response shall be as per Data Sheet A.

- c) The amplifiers shall be heavy-duty type.
- d) The amplifiers shall be of solid-state electronic type and compact in construction.
- e) Pre-amplifying stages shall be furnished to make it suitable for operation with low level input such as microphone.
- f) Suitable arrangement shall be provided for amplifiers as well as preamplifier, to cut down the power requirement during standby or idling time in order to minimise open line hum as well as unnecessary loss of power.
- h) Controls to be provided.
  - i. 0 - 100% volume control setting with facility of coarse and fine setting.
  - ii. Input sensitivity control.

All these controls shall be located inside the handset station.
- i) Wherever a number of loud speakers are connected to one handset, suitable amplifier shall be provided.
- j) Amplifier set of a handset station shall be complete with power amplifier, voltage stabiliser, mike preamplifier, etc. and housed in the control box of handset station.
- k) The various amplifiers shall be modular in construction (preferably card type edge connectors) for ease of maintenance and trouble shooting.

## 6.6 HANDSET STATIONS

6.6.1 The following type of handset stations shall be offered as per BOQ:

- a) Desk mounted master type
- b) Desk mounted indoor type
- c) Wall/ Column mounted indoor type
- d) Wall/ Column mounted outdoor type
- e) Portable handsets

### 6.6.2 Facilities

- a) Master Station:

Master Control Units shall be microprocessor based and of modular design. These units shall be mosaic grid compatible flush mountable/table mounted type along with flexible goose neck type microphone, luminous miniature push buttons for interzone communications, alarm tone generation, fire alarm tone generation etc.

However, master control unit for CHP zone (if required) shall be table/desktop monitoring type.

The master station of each group shall have following operational features:

- i. Originate calls within its own group on "Normal" as well as on "Priority" basis.
- ii. Communicate with handset stations of a particular group.
- iii. Call handset stations of all groups on "All Call Basis".
- iv. Facility for generating and introducing the siren tone in page channel.

- b) Handset Station:

Each of the handset stations shall have the following facilities:



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b> PE-SS-999-557-E001	
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	11 OF 25

- i. Originate and receive calls within its own group.
- ii. Receive calls from any of the group masters.
- iii. Communicate with handset stations as well as the group master of other group via his group master station.

Each handset station shall have following:

- (i) One (1) - telephone handset.
- (ii) One (1) - Cradle switch for resetting the handset.
- (iii) One (1) - "Press to Page" push button.
- (iv) One (1) - "Press to Mute Loudspeaker" push button.
- (v) Pre-amplifier and Power amplifier.
- (vi) Indication for "A.C. SUPPLY ON".
- (vii) Indication for "PARTY CHANNEL BUSY".

#### 6.6.3 Material

- a) The desk/ wall mounted indoor handsets shall be of elegant look and be made of die cast aluminium/ mild steel/ fibre glass/ reinforced polyester or any other material subject to prior approval of purchaser.
- b) Wall mounted outdoor handsets shall be made of high impact polystyrene/ fibre glass/ reinforced polyester or any other suitable material to prevent it from breaking due to fall or rough handling etc.
- c) However the material of handsets shall be subject to purchaser's approval.

6.6.4 The outdoor wall/ column mounted handsets shall be of weatherproof construction and shall be provided with neoprene gaskets. Suitable pilfer protection of wall/ column mounted handset stations shall be provided with the help of internal anchoring bolts and special (e.g. triangular) screws which can be operated only by special spanners.

Outdoor handsets shall be provided with lockable type cover for protection against pilferage. Alternatively, pilfer protected wall/column mounted handset stations with built-in microphone/ loudspeaker shall be provided. Vendor to provide either or both the alternatives as specified in BOQ.

6.6.5 Wall/ column mounted instruments shall be heavy duty type and shall also be suitable for dust and noise laden atmosphere.

6.6.6 Desk mounting type (indoor) and wall mounting column type (outdoor) handset stations shall have a degree of protection as follows:

Indoor desktop mounted - IP32

Outdoor (including CHP Area )Wall/column mounted - IP55

6.6.7 All the switches, including the hook switch shall be encapsulated dustproof micro-switches. Alternatively, in place of micro-switches, reed relays/ tactile push switches can be offered. Any other suitable mechanism may be used subject to prior approval of purchaser (before placement of order). All switches shall be suitably protected from the prevalent atmosphere and shall have an extremely long life.

6.6.8 Each handset shall be provided with sensitive dynamic noise cancelling type retractable coil type of cord of length not less than 1.2 metres when stretched.

6.6.9 The amplifier units in the handset station shall be plug-in type so that maintenance of the faulty unit can be done without much downtime. These amplifiers shall be of special design suitable for industrial use such that while providing high line drive audio signal, it shall also provide a special anti side tone



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 12 OF 25

circuit.

6.6.10 The db level of the announcement at any station by its own handset shall be lower than the announcement at the same station by any other handset. This shall be provided to ensure that after all the line losses, the db level of announcement from any other station at a particular station is not less than the db level of announcement of that station itself. Vendor shall demonstrate the above at site.

6.6.11 For intelligibility of the human speech, the microphones of the handsets shall be noise cancelling along with directional features by providing necessary acoustic tailoring of frequency response for external noise. Frequency response and type of microphone shall be as per Data Sheet A.

6.6.12 The handset shall be mounted on or within a control box complete with matching transformer, cradle switch, page switch, loud speaker mute switch, power indication lamp, terminal strips, call master switches etc. The handset shall also contain amplifying system of the station. "Private Channel Busy" indication shall also be provided.

6.6.13 Power terminals shall be shrouded. Isolating switch & fuses for incoming power supplies shall be mounted inside handset.

6.6.14 Portable Handsets/ Sockets

- a) For portable handsets, multi-pin sockets with inbuilt power supply unit shall be provided. Multi-pin socket shall be suitable for outdoor operation with IP55 degree of protection.
- b) Degree of protection of portable handsets shall be as specified in Data Sheet A.
- c) Portable handsets shall be light in weight (upto 5Kg) but sturdy in design and shall be housed in a weather proof enclosure with shoulder straps.
- d) Separate provision of power supply for portable handset will not be provided by BHEL
- e) Length of connecting wire from socket to portable handset should be 5 meter minimum.

6.7 LOUD SPEAKERS

6.7.1 Re-entrant type

- a) Re-entrant horn type speakers shall be provided with line matching transformer, and bracket suitable for wall/ column mounting.
- b) Material and degree of protection shall be as specified in Data Sheet A.
- c) For distributed system, volume level adjustment shall be provided at handset if the line-matching transformer is not provided.
- d) The mounting bracket shall be with adjustable base suitable for vertical movement. However, it shall be possible to change the axis of rotation by loosening the screws. Firm fixing arrangement with spring lock washers shall be provided.
- e) Other technical parameters for re-entrant horn type speakers shall be as per Data Sheet A.

6.7.2 Cone Type

- a) Permanent magnet, cone type speaker with line matching transformer shall be housed in a sturdy metal cabinet suitable for wall/ column or ceiling mounting as specified in the schedules and drawings.
- b) Material and degree of protection shall be as specified in Data Sheet A.
- c) For distributed system, volume level adjustment will be provided at handset if the line-matching transformer is not provided.
- d) The cabinet shall have gridded metal faceplate to diffuse high frequencies and prevent damage to the speaker. Housing shall be treated with acoustic under-coats to prevent resonance.
- e) Other technical parameters for cone type speakers shall be as specified in Data Sheet A.



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b> PE-SS-999-557-E001	
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	13 OF 25

## 6.8 JUNCTION BOXES

### 6.8.1 Type of Junction Boxes

- a) **Power Junction Box:** This type of junction box shall be used for looping of incoming and outgoing power cables for handset stations.
- b) **Signal Junction Box:** If required, this type of junction box shall be used for looping of incoming and outgoing signal cables for handset stations.

If Signal JB is not the part of Power junction Box it should be provided for Desktop station, flush mounted and master control station separately. In case Power Junction Box can accommodate Signal cable termination and power cable termination both then Bidder shall not quote for SJB.

Number of ways	12/24/36/48/64/72/96/128 with 20% spare terminals
Material & thickness	Fibre glass reinforced polyester (FRP) 4 mm thick/ Mild Steel (MS) 2mm thick/ Al LM6 3 mm thick
Surface	Hot dip galvanised(except for Al Alloy LM6 which shall be painted )
Type	Screwed at all four corners for door. Door handle shall be of stainless steel (SS). Self-locking . Door gasket shall be of synthetic rubber
Mounting clamps & Accessories	Suitable for mounting on walls / columns / structures etc. The brackets bolts, nuts, screws, glands and lugs required for erection shall be of brass.
Type of terminal block	Rail mounted maxitermi or cage-clamp type suitable for conductor size upto 2.5 mm <sup>2</sup> . A M6 earthing stud shall be provided
Protection class	IP-55 (minimum) for all applications including CHP AREA .

- 6.8.2 It shall be possible to isolate any part of the circuit during maintenance/ testing without affecting the other circuits.

## 6.9 MAIN DISTRIBUTION BOARD (POWER Distribution Board)

- 6.9.1 Main distribution board shall be used for distribution of incoming power supply to different loops. Construction of main distribution board shall be similar to other junction boxes. Degree of protection and material shall be as specified in Data Sheet A.

- 6.9.2 Main distribution Board shall consist of two separate units:

- a) **Auto changeover Box**  
Auto changeover box shall have provision for terminating incoming AC normal and UPS supply and the outgoing line to PA System distribution box. Suitable switch-fuse units/MCB shall be provided independently for both the incoming supplies.  
Heavy-duty auto changeover contactor(s) and indicating lamps for "Supply Healthy" indication shall be provided. Vendor to ensure that no supply paralleling or fault coupling occurs during changeover.

- b) **Distribution box**  
Distribution box shall be used for distribution of power supply to the different loops. Suitable number of outgoing switch-fuses and incoming switches shall be provided.

Auto changeover box and distribution box may be accommodated in a single box.

Main distribution box shall be of MS sheet with thickness 16 SWG. MDB shall have provisions of two inputs with auto changeover and 12 outputs (minimum), MCB at input and MCB & HRC fuse at output.

- 6.10 PDB shall be wall/column mounted. Necessary glands required for cable entry shall be provided along with PDB.WEATHER PROTECTING CANOPY / ACOUSTIC HOOD



TITLE  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	SPECIFICATION NO.	PE-SS-999-557-E001
	VOLUME	II B
	SECTION	D
	REV 01	DATE 23/03/2012
	SHEET	14 OF 25

#### 6.10.1 WEATHER PROTECTING CANOPY

Weather protecting canopy shall be provided for outdoor field call station to meet the DOP IP-65 for CHP area and IP-55 for all other outdoor areas. The canopy shall be made of 18SWG MS/ 1.75 mm minimum glass fiber material to house the field call stations.

#### 6.10.2 ACOUSTIC HOOD

The handset stations in the noisy areas like turbine Hall, BFP, firing floor, mill area, etc., shall be housed in Acoustic hoods. The acoustic hood will be made of MS material (Minimum 1.6mm thick)/FRP material (3 mm thick), identical to panels, paint finish. An industrial type free standing, wall mounted hood shall be used for providing the above requirements. The design noise level within the hood shall be limited to a maximum of 60 dB SIL. The Stations envisaged inside the acoustic hood shall not be provided with canopy.

#### 6.10.3 ACOUSTIC BOOTH : Sound protecting Industrial type free standing booth

Floor mounted Acoustic booth shall be 850(L)X700(W)X2200(H) mm and made of MS 1.6mm thick/ FRP material 4mm thick. The degree of protection for acoustic booth shall be IP -55. Hinged door entry shall be provided. Suitable table /Mounting arrangement shall be provided inside the booth for mounting the handset.

#### 6.11 SIGNAL LOOP LENGTH

The signal loop length will be around 4 Km in unit area, around 8 Km in coal handling plant area and around 7 Km in common plant area from the central exchange. Further, the distance between two stations in areas other than unit may be more than 1 Km. Bidder shall provide necessary repeaters, power supply modules etc to meet the requirement of the same. No. of Repeaters will be indicated in BOQ section C/

#### 6.12 CABLES & CABLING

Following power, signal & loudspeaker cables will be used:

- Power cable : 3C-2.5 mm<sup>2</sup> Cu armoured.
- Signal cable : 4P-0.5 mm<sup>2</sup> (7/0.3mm) Cu overall screened armoured.
- Loud speaker cable : 2P-0.5 mm<sup>2</sup> (7/0.3mm) Cu overall screened armoured.

The cable size between MDF to SDF will 24P-0.5 mm<sup>2</sup> / 12P-0.5 mm<sup>2</sup> as per requirement.

**If different size of cable is required, bidder must intimate in their offer.**

6.12.1 The PA system cables will be laid in ready trays routed in different areas of power plant for power & signal cables. Power cable will run in separate trays, similarly the signal cables will run in separate trays.

#### 6.13 ENCLOSURE FOR INSTRUMENTS & OTHER EQUIPMENTS

Unless otherwise indicated with the equipment, all panels, desks, cabinets and enclosures furnished shall at least comply with the requirements of protection classes as indicated below:

Indoor air-conditioned (AC) areas	-	IP22
Indoor non air-conditioned (AC) areas	-	IP42
Ventilated enclosures	-	IP42
Non-Ventilated	-	IP54
Outdoor(included CHP)	-	IP55

The design of panels, cabinets, enclosures and packaging density of components mounted therein shall be such that the temperature rise does not exceed 10<sup>0</sup> C above the ambient under the worst conditions. All panels/ cabinets housing electronic equipment in non-air-conditioned area shall be provided with redundant cooling fans along with filters.



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b> PE-SS-999-557-E001	
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	15 OF 25

#### 6.14 INTERFACE WITH EXISTING EXCHANGE:

PA system central exchange for the unit will be interfaced with existing/new EPABX/ PA System.

#### 6.15 OTHER

6.15.1 Locations in different zones for different type of handset stations and loudspeakers are indicated in Section – C.

6.15.2 Bidder shall furnish separately the power supply requirements (in watts) for both central exchanges along with different stations attached to each exchange to decide the feeder size.

6.15.3 Makes of equipment/ components shall be subject to purchaser's approval during detailed engineering. However, bidder shall furnish the list of makes along with the offer.

6.15.4 Three sets of hard as well soft copies (in pdf form) of dwg/ documents will be required for the purchaser's review/ approval.

6.15.5 After completion of work at site, bidder shall prepare "AS BUILT DRAWINGS" and "O&M Manuals" as per distribution list enclosed with Section – C.

#### 6.16 COMMON REQUIREMENTS OF VARIOUS EQUIPMENT OF SUPPLY

##### 6.16.1 Surface Treatment

##### 6.16.1.1 Painting:

- a) Pre-treatment: In the first step, complete surface shall be cleaned with sand paper and/ or cotton cloth to remove accumulated dust and dirt. Surface pre-treatment shall generally conform to IS: 6005. Pre-treated surface shall be provided with one coat of red oxide paint.
- b) Surface Finish: Two coats of abrasion resistant, anticorrosive synthetic enamel shall be applied on the pre-treated surface. Second coat shall be applied only when the first coat has completely dried-up. Surface finish after the painting shall be smooth, uniform and free from spots.
- c) Thickness of paint shall be 80 microns.

##### 6.16.1.2 COLOUR OF EQUIPMENT

Following colour paint shade shall be followed for different items. All painting shall be through powder coated epoxy base paint.

Central Exchange Interior and exterior	: As per project requirement
Any misc. item including wall mounted MDB in CCR/EER area	: As per project requirement
Field Stations, junction boxes, horn type speakers, extension amplifier and cone type speakers, Flush mounted, desktop and master stations	: As per project requirement /As per manufacture standard color shade
weather protecting canopy, acoustic hood ,MDB	: As per project requirement

##### 6.16.1.3 Galvanizing

- a) Pre-treatment: In the first step, complete surface shall be cleaned with sand paper and/ or cotton cloth to remove accumulated dust and dirt. Surface pre-treatment shall be done before galvanization, which shall conform to the requirements of IS: 6005.
- b) Surface-Finish: Articles shall be hot dip galvanized after fabrication, surface cleaning and pre-treatment. The galvanizing shall be done according to IS: 2629. The galvanizing shall be



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 16 OF 25

- c) uniform, clean, smooth, continuous and free from acid spots. If the galvanizing of the samples is found defective, the entire batch of steel will have to be regalvanized at vendor's cost.
- Weight and thickness of zinc deposited shall not be less than 610 gm/m<sup>2</sup> and 75 microns respectively. The purchaser reserves the right to measure the thickness of zinc deposit by an Elkometer or any other instrument acceptable to purchaser and reject any component, which shows thickness of zinc at any location to be less than the value specified.

#### 6.16.2 Labels

All components whether mounted inside or on the surface of the main equipment, shall have identifying references as per the arrangement drawings and wiring diagrams. The labels shall be of non-rusting metal or 3 ply lamicaid and shall have white inscriptions on black background. The label size shall be subject to the purchaser's approval.

#### 6.16.3 Earthing

6.16.3.1 Earthing of all sheet metallic parts of enclosures of all equipments covered in this specification which are non-current carrying shall be bonded to an earth stud provided in the equipment. The Contractor shall ensure that proper earthing terminals are provided in all equipment covered in this specification.

6.16.3.2 Earthing of cabling system: Armour of cables shall be earthed at both ends of cable.

For earthing of power supply cable, an additional core shall be provided or else a continuous ground conductor of 16 SWG GI wire shall be run along each conduit run.

6.16.3.3 The supply and installation of all earthing wires, earthing plates and other materials for earthing the entire PA System shall be under the scope of the Contractor. The Contractor shall properly earth the system so that there is no interference in the communication system due to electromagnetic noise.

#### 6.16.4 Packing

The material shall be packed as per manufacturer's standard to ensure the protection against mechanical damage, jerks, rain etc. during transit and for a prolonged period of storage. Packing procedure shall be subject to the purchaser's approval.

### 7.0 INSPECTION AND TESTING

#### 7.1 INSPECTION

7.1.1 The following stages of manufacture shall be stage inspected by Purchaser or his duly authorised representative.

- a) Inspection of manufacturing processes such as shearing, punching, bending, welding, galvanizing, painting etc.
- b) Inspection of finished products.
- c) Inspection of packing material and procedure.

7.1.2 All materials, components and equipments covered under this specification shall be procured, manufactured, inspected and tested as per the purchaser's standards and quality plan of vendor duly approved by purchaser.



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	SPECIFICATION NO.	PE-SS-999-557-E001
	VOLUME	II B
	SECTION	D
	REV 01	DATE 23/03/2012
	SHEET	17 OF 25

- 7.1.3 All material used for the construction of the equipment shall be new and shall be in accordance with the requirements of this specification. Materials utilized shall be those, which have established themselves for use in such applications.
- 7.1.4 All acceptance and routine tests as per relevant standards and specification shall be carried out by the manufacturer. Charges for all these routine and acceptance tests for all the materials shall be deemed to be included in the bid price.
- 7.1.5 Bidder shall prepare and submit along with the bid the quality plan on the prescribed format. Quality plan shall include details of quality control and testing at different stages of manufacture, testing of completely assembled items.
- 7.2 TESTING
- 7.2.1 Tests at Works
- 7.2.1.1 The supplier shall perform all tests necessary to ensure that the material and workmanship conform to the relevant standards and that such tests are adequate to demonstrate that the equipment will comply with the requirements of this specification. Copy of the standards/ test methods to which the tests will be conducted are to be furnished during detailed engineering stage.
- 7.2.1.2 Test certificates shall be submitted for purchaser's approval before despatch of the equipment. The purchaser may witness the test at supplier's works, for which sufficient advance notice shall be given before testing.
- 7.2.1.3 The following tests shall be conducted as acceptance tests at manufacturer's works:
- a) Printed Circuit Boards  
Following tests are to be performed on different PCBs and those shall also conform to approved Quality Plan:
    - i. Burn-in test for all PCBs (Routine test)
    - ii Climatic and Durability tests (Vibration, dry heat test, damp heat cycle, low temperature and transportation)
  - b) Amplifier & Handset
    - i. Rated output power
    - ii. Rated input voltage
    - iii. Power consumption
    - iv. Current drain
    - v. Harmonic distortion
    - vi. Input/ Output Impedance
    - vii. Insulation resistance
  - c) Speakers  
All the speakers shall be tested as per IS: 7741. Apart from these during assembly, the components like transistors, ICs, resistances, capacitors, switches, relays etc. shall be tested and a certificate shall be obtained from the manufacturer which may be verified by others.
  - d) Junction Boxes  
All junction boxes shall be checked for 100% IR, HV and dimensional checks.
  - e) Tests for painting  
The painting of articles shall meet the requirements of IS: 1477 (Part 1 & Part 2) in general.
  - f) Tests for galvanizing  
Weight, thickness and uniformity of zinc, coating shall be determined in accordance with IS: 6745 and IS: 2633 shall conform to the specification requirements.



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 18 OF 25

### 7.2.2 Site Tests

7.2.2.1 After assembly, all major equipment together are to be site tested to establish the workability of the system at site.

7.2.2.2 Following tests are to be performed at site:

- a) Insulation resistance, HV test for cables.
- b) Rated output power.
- c) Performance of PAGE and PRIVATE channels for all equipments in the entire Public Address System.
- d) Proper functioning of auto-changeover unit.
- e) Test to ensure that db level of announcement at any station by its own handset shall be lower than announcement at the same station by any other handset.

7.2.2.3 Bidder to perform all site tests as per the Field Quality Plan. During contract stage bidder to furnish details of these tests & the standards to which these conform for purchasers approval.

### 7.2.3 General Requirements of Site Testing

7.2.3.1 The Owner may ask for any tests at site which in his opinion are necessary to determine that the works comply with the specification, manufacturer's instruction or the applicable IS code of installation. The

Contractor shall be responsible for conducting the tests and shall bear the cost of such additional tests.

7.2.3.2 The contractor shall have to bring all testing equipment & instruments to carry out the job. All instruments shall be calibrated to the satisfaction of the Engineer before actual testing and tests shall be conducted by qualified & experienced personnel.

7.2.3.3 All documents/ records regarding test data and all other measured values shall be submitted to Engineer for approval and subsequent record and reference. The results of all tests shall conform to the specification requirements as well as any specific performance data guaranteed during finalisation of contract.

### 7.2.4 Type test

Type test reports should be furnished as per enclosed Annexure A of Quality plan.

## 9.0 PRICES

9.0.1 The bidder shall quote his prices for equipment of complete Public Address System, supply, as per BOQ format enclosed with Section – C.

9.0.2 The unit rates of supply for all equipment and service quoted by the bidder shall be firm for a variation of quantities limited to:

- a.  $\pm 20\%$  of total order value till finalisation of engineering details & BOQ.
- b.  $+10\%$  of the total order value in addition to (a) above, till the completion of job.

9.0.3 Purchaser reserves the right to delete/add any equipment or services from the bidder's scope and, for price adjustment in such cases, unit prices quoted by the bidder will be considered.

9.0.4 The bidder shall furnish unpriced "Price Schedule" of all equipment and services, as per BOQ along with the technical bid.



<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b>	PE-SS-999-557-E001
	<b>VOLUME</b>	II B
	<b>SECTION</b>	D
	<b>REV</b> 01	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	19    OF    25

9.0.5 Bidder to note that the price for System Engineering Design shall form part of main equipment and will not vary with the change in scope of supply of equipment.

9.0 **PERFORMANCE GUARANTEES**

Bidder shall guarantee that the system offered shall meet the requirement as indicated in this specification and as confirmed by them in various clauses of technical data sheets. If it is proved that the system doesn't conform to performance guarantee, the bidder shall be ready to replace the faulty equipment/components at site without any extra cost.

10.0 **INSTALLATION AND MAINTENANCE MANUAL**

10.1 Instruction manuals for the installation, operation and maintenance of PA System shall be furnished before despatch of the equipment.

10.2 Draft manual shall first be submitted for Purchaser's approval. The manual shall contain minimum following details:

- a) General description of equipment
- b) Brief system description for which equipment is meant
- c) Technical data
- d) Salient constructional details
- e) Technical leaflets of important components used in the system
- f) All drawings
- g) Type and routine test certificates
- h) Instructions to be followed on receipt of equipment at site and for storage
- i) Material handling instructions
- j) Erection procedure and checks
- k) Pre-commissioning checks
- l) Commissioning procedures
- m) Operation instructions
- n) Maintenance instructions
- o) Trouble shooting
- p) Safety instructions

11.0 **DOCUMENTATION**

11.1 **DOCUMENTS TO BE FURNISHED WITH THE BID**

- a) Brief System Description.
- b) Filled and stamped Data Sheet B

11.2 **DOCUMENTS TO BE FURNISHED BY THE VENDOR DURING DETAILED ENGINEERING STAGE**

- a) Full description and design of the equipment and its operation.
- b) General arrangement drawings cum Technical Datasheet for various equipment as per drawing list.
- c) Detailed write up on the method of testing.
- d) Interconnection diagram showing the interconnection between main distribution board, master station(s), JB's, handsets, loud speakers covering the size of cable.
- e) Cable schedule
- f) Operation and maintenance (O&M) manual.
- g) Signed and stamped Standard Quality Plan.
- h) Minimum 3 copies of all test certificates for the tests actually conducted on the equipment



TITLE

Technical Specification  
for  
PUBLIC ADDRESS SYSTEM

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 20 OF 25

## Erection and Commissioning



TITLE

**Technical Specification  
for  
PUBLIC ADDRESS SYSTEM**

SPECIFICATION NO. PE-SS-999-557-E001

VOLUME II B

SECTION D

REV 01 DATE 23/03/2012

SHEET 21 OF 25

## CONTENTS

- 1.0 GENERAL
- 2.0 CODES AND STANDARDS
- 3.0 INSTALLATION
  - 3.1 PA SYSTEM EQUIPMENT INSTALLATION
  - 3.2 ITEMS OF SUPPLY FOR CABLING INSTALLATION WORK
  - 3.3 INSTALLATION OF CABLES AND CONDUITS
  - 3.4 ADDITIONAL POINTS OF CONSIDERATION
- 4.0 QUANTITY MEASUREMENT AND WASTAGE ALLOWANCE
  - 4.1 MEASUREMENT OF QUANTITIES
  - 4.2 CUTTING AND WASTAGE ALLOWANCE
- 5.0 TESTING
  - 5.1 SITE TESTS
  - 5.2 GENERAL REQUIREMENTS OF SITE TESTING
- 6.0 PRICES
  - 6.1 GENERAL
  - 6.2 UNIT PRICES OF INSTALLATION WORK



TITLE  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	SPECIFICATION NO.	PE-SS-999-557-E001
	VOLUME	II B
	SECTION	D
	REV 01	DATE 23/03/2012
	SHEET	22 OF 25

### 1.0 GENERAL

The scope of this specification covers handling and storage at site; installation, testing and commissioning of Public Address System for efficient and trouble free operation after installing the same at site.

### 2.0 CODES AND STANDARDS

The installation shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment will be installed. Nothing in this specification shall be construed to relieve the vendor of his responsibility.

### 3.0 INSTALLATION

The contractor shall carry out total installation work as per the requirements of the specification and instructions of Engineer.

#### 3.1 PA SYSTEM EQUIPMENT INSTALLATION

3.1.1 Installation of PA System equipment shall include erection, connection, grounding, testing and commissioning of the equipment. Installation activity shall also include provision of all fittings, supports, hangers and other accessories which are not specifically mentioned but are required to complete the installation work.

3.1.2 Equipment shall be brought to the place of work only at the time of erection. Unpacking, handling, assembling and erection shall be as per the guidelines of installation manual and Field Quality Plan.

3.1.3 Erection shall commence in an area only after the clearance has been obtained from the Engineer. Vendor shall ensure that all activities, which are liable to damage the equipment in that area, have been completed.

3.1.4 The drilling and welding of building steel work for fixing supports and brackets shall not be done without the prior approval of Engineer.

3.1.5 Wherever drilling and welding of building steel work for fixing supports and brackets is done, the same shall be re-painted and restored to the same paint shade as per site requirement at no extra cost to purchaser.

#### 3.2 ITEMS OF SUPPLY FOR CABLING INSTALLATION WORK

The supply of below listed items shall be considered to be part of cabling installation work:

##### 3.2.1 Cable glands

Cable glands shall be single or double compression type. Material of glands shall be brass. Nickel plating shall be provided if indicated in Data Sheet A. Rubber components used in the gland shall be of neoprene. Name/ trade name of manufacturer, type no. and applicable range of outer diameter of cable shall be engraved/ printed on the cable gland.

##### 3.2.2 Cable lugs

Cable lugs shall be of tinned copper. Name/ trade name and size shall be engraved/ printed on each cable lug.

##### 3.2.3 Self Locking Clamps

Clamps shall be of nylon material having self-locking feature when the cord is looped. They shall be provided with manual lock release. Clamp cord shall not move in the backward direction once it has been locked, unless the lock release is depressed.

##### 3.2.4 Ferrules

Ferrules shall be required for individual core of cables hence they shall be suitable for the insulated



TITLE  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	SPECIFICATION NO.	PE-SS-999-557-E001
	VOLUME	II B
	SECTION	D
	REV 01	DATE 23/03/2012
	SHEET	23 OF 25

conductor diameter. They shall be of plastic material. Numbering on the ferrules shall be engraved type. Colour of base shall be yellow and that of engraving shall be black. Engrave colouring shall be of durable quality to match the entire life of the plant. Engraving shall be legible from a distance of 600 mm. Ferrules shall be interlocked type such that the interlocked ferrules take the shape of tube with complete ferrule number marked in a straight line.

### 3.2.5 Tags

For identification, cables shall be provided with cable number tags of durable fibre, aluminium or stainless steel sheets. Cable numbers shall be engraved type in case of aluminium or stainless steel tags, and printed type in case of fibre sheet. Tags shall be of durable quality of size 60mm x 12mm with a tie hole at each end and shall be provided with non-corrosive wire of sufficient strength for tagging.

## 3.3 INSTALLATION OF CABLES AND CONDUITS

3.3.1 All cables shall be provided with identification tags indicating the cable numbers in accordance with the cable circuit schedule. Tags shall be fixed at both ends of cables and on both sides of floor/ wall crossings.

3.3.2 All cable entries in the equipment shall be sealed by cable glands.

3.3.3 Power cable terminations shall be carried out in such a manner as to avoid strain on the terminals by providing suitable clamps near the terminals.

3.3.4 Control cable cores entering the equipment or control panels shall be neatly bunched and strapped with PVC perforated tapes/ nylon ties and suitably supported to keep them in position at the terminal block. Copper conductor control cables shall be terminated directly into screw type terminals provided in the equipment.

3.3.5 Wherever control cables are to be terminated by means of terminal lugs, the same shall be of tinned copper compression type.

3.3.6 All spare cores shall be connected to spare terminals wherever possible. If spare terminals are not available, spare cores shall be neatly dressed and suitably taped at both ends.

3.3.7 Individual cores of control cables shall have ferrules for identification. Ferrule numbers shall be provided as per the control schemes and other related documents supplied by the purchaser.

## 3.4 ADDITIONAL POINTS OF CONSIDERATION


3.4.1 The installation work shall be carried out in a neat workman-like manner by skilled, experienced and competent workmen.

3.4.2 Installation shall be properly coordinated at site with other services and wherever necessary suitable adjustment shall be made to avoid interference with any part of the building, structures, equipment, utilities and services. Any such adjustment shall be done with the approval of Engineer.

3.4.3 All materials being supplied or consumed during erection by the vendor in the process of erection work shall be of the best quality and according to the relevant standards. All materials shall be got inspected and approved by the Engineer before the same is used for erection work.

3.4.4 Any work like chipping/ breaking of existing structure like walls, floors, fabrications, etc. shall be done after taking prior approval of Engineer.

3.4.5 Any wrong erection shall be removed & re-erected promptly to comply with the design requirements to the satisfaction of Engineer. Re-erection shall be done at no extra cost to the purchaser.

	TITLE	SPECIFICATION NO.	PE-SS-999-557-E001
	<p style="text-align: center;"><b>Technical Specification for PUBLIC ADDRESS SYSTEM</b></p>	VOLUME	II B
		SECTION	D
		REV 01	DATE 23/03/2012
		SHEET	24 OF 25

3.4.6 While testing and commissioning, if the system is observed to be not functioning, it shall be the responsibility of the contractor to check, rectify and demonstrate that the defect has been removed to the satisfaction of purchaser.

3.4.7 Before energisation of system, physical inspection shall be carried out and all foreign bodies shall be removed and loose connecting bolts etc. shall be tightened.

#### 4.0 QUANTITY MEASUREMENT AND WASTAGE ALLOWANCE

##### 4.1 MEASUREMENT OF QUANTITIES

4.1.1 For all payment purposes, measurement shall be made on the basis of the execution drawings/ physical measurements. Physical measurements shall be made by the contractor in the presence of the Engineer.

4.1.2 Wastage allowance shall be kept in consideration while making material appropriation of supplied items.

##### 4.2 CUTTING AND WASTAGE ALLOWANCE

Vendor shall carefully plan the cutting schedule of each cable drum such that wastages are minimised and any resultant short lengths can be used where appropriate route lengths are available.

#### 5.0 TESTING

##### 5.1 Site Tests

5.1.1 After assembly, all major equipment together are to be site tested to establish the workability of the system at site.

5.1.1.1 Following tests are to be performed at site:

- a) Insulation resistance, HV test for cables.
- b) Rated output power.
- c) Performance of PAGE and PRIVATE channels for all equipments in the entire Public Address System.
- d) Proper functioning of auto-changeover unit.
- e) Test to ensure that db level of announcement at any station by its own handset shall be lower than announcement at the same station by any other handset.


5.1.1.2 Bidder to perform all site tests as per the Field Quality Plan. During contract stage bidder to furnish details of these tests & the standards to which these conform for purchasers approval.

##### 5.2 General Requirements of Site Testing

5.2.2.1 The Owner may ask for any tests at site which in his opinion are necessary to determine that the works comply with the specification, manufacturer's instruction or the applicable IS code of installation. The Contractor shall be responsible for conducting the tests and shall bear the cost of such additional tests.

5.2.2.2 The contractor shall have to bring all testing equipment & instruments to carry out the job. All instruments shall be calibrated to the satisfaction of the Engineer before actual testing and tests shall be conducted by qualified & experienced personnel.

5.2.2.3 All documents/ records regarding test data and all other measured values shall be submitted to Engineer for approval and subsequent record and reference. The results of all tests shall conform to the specification requirements as well as any specific performance data guaranteed during finalisation of contract.

	<b>TITLE</b>  <b>Technical Specification for PUBLIC ADDRESS SYSTEM</b>	<b>SPECIFICATION NO.</b> PE-SS-999-557-E001
		<b>VOLUME</b> II B
		<b>SECTION</b> D
		<b>REV</b> 01 <b>DATE</b> 23/03/2012
		<b>SHEET</b> 25 OF 25

## 6.0 PRICES

### 6.1 GENERAL

Unit prices listed out in this clause shall be applicable for payment to the contractor for activities covered under this specification. The following shall be kept in consideration while quoting the prices:

### 6.2 UNIT PRICES OF INSTALLATION WORK

Detailed requirement for all the items are given in the specifications, Data Sheet A and Annexures.

- a) Unit price of installation shall include transportation of materials from Vendor's/ Owner's storage yard to work site, handling, testing before erection, testing after erection and commissioning of materials including supply and installation of all associated materials (including support materials) and consumables, carrying out of all associated minor civil works and furnishing of all skilled/ unskilled labour, supervisory and commissioning staff.
- b) Price of earth connections are to be included in the erection price of equipment as above.
- c) No separate prices shall be applicable for termination of cables. Cable termination shall include drilling of gland plates, fixing of glands, ferrules and lugs and connection to the equipment.
- d) Purchaser reserves the right to delete/ add any of the equipment or services from the bidder's scope of work.
- e) The unit prices quoted shall be for supply and/ or installation as explained in detail in the clauses in subsequent paragraphs. No other prices shall be applicable for the purpose of payment.
- f) While quoting the prices for installation, the following shall be considered as part of job:
  - i. Cable glands and lugs
  - ii. Clamps, ferrules, aluminium/ stainless steel tags as per the project requirements
  - iii. Fasteners like nuts, bolts, washers, spring washers, rawl plugs, anchoring bolts and lugs etc.
  - iv. Conduit plugs, gaskets, couplers, and insulated bushings
  - iv. Sealing compounds for wall and floor openings
  - v. Consumables like enamels, cold zinc paint, electrodes for welding etc.
  - vi. Materials for minor civil works
- g) The following shall be arranged by the contractor at no extra cost:
  - i. All unskilled and skilled labour
  - ii. All supervisory and commissioning staff
  - iii. All facilities/ equipment for site fabrication such as cutting, bending and drilling equipment
  - iv. Welding set(s)
  - v. Material handling equipment
  - vi. All special tools and tackles for erection
  - viii. All testing equipment
- h) Requirement of Quality Plan and Field Quality Plan shall be considered in the quoted prices.
- i) E & C spares required shall be part of E & C charges.
- j) Instruments required for testing & commissioning shall be arranged by the contractor and shall be taken back after E & C.
- k) Fabrication and painting of support structures of various equipments shall be in contractor's scope. However structural steel shall be free issue by BHEL.



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet B</b>	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	1 OF 5

**DATA SHEET – B**

**To be submitted alongwith Bid**

S.NO.	DESCRIPTION	PARTICULARS	UNIT
1.0	SYSTEM DESIGN DATA		
1.1	Design ambient temperature :	°C	
2.0	APPLICABLE STANDARDS		
2.1	Whether all standards specified in Annexure I of Data Sheet A followed :	<input type="checkbox"/> Yes <input type="checkbox"/> No	
3.0	COMPLETE SYSTEM REQUIREMENTS		
a)	Frequency response :	Hz	
b)	Hum & noise level or signal to noise level :		
4.0	SCOPE OF SYSTEM DESIGN : ENGINEERING	<input type="checkbox"/> Included <input type="checkbox"/> Excluded	
5.0	POWER SUPPLY		
5.1	Whether the system suitable for operation for power supply details given in specification and Data Sheet A. :	<input type="checkbox"/> Yes <input type="checkbox"/> No	
5.2	Power supply requirement at 240V AC :	kVA	
6.0	CONSTRUCTIONAL REQUIREMENTS		
6.5	AMPLIFIERS : (To be furnished separately for each type of amplifier)	Pre- Line Loud Speaker Amplifier Amplifier Amplifier	
a)	Name of the manufacturer :		
b)	Type and manufacturer's catalogue no. :		
c)	Power supply details :		
d)	Full load consumption(VA) :		
e)	Rated load (W/Ohm): output impedance		



TITLE

**PUBLIC ADDRESS SYSTEM**  
**Datasheet B**

SPECIFICATION NO. PE-TS-392-557-E-001

VOLUME IIB

SECTION D

REV 0 DATE 23/03/2012

SHEET 2 OF 5

- f) Output voltage (V) :
- g) Frequency response (Hz) :
- h) Noise level (db) :
- i) Controls provided
- i. Cont. variable :  Yes  No  
volume control
- ii. Standby and idle :  Yes  No  
time power supply  
cut-off arrangement  
arrangement
- j) Sensitivity w.r.t. (mV):  
nominal output

**6.6 HANDSETS****6.6.1 Master Handset Station(s)**

- a) Name of the manufacturer :
- b) Type and manufacturer's catalogue no. :
- c) Material :
- d) Degree of protection :
- e) Surface treatment :
- f) Whether all features :  Yes  No  
provided on master  
handset station as per  
specification requirements
- g) Type of circuit protection:
- h) Mounting arrangement :

**6.6.2 HANDSETS (To be furnished separately for each type)**

Outdoor/ Indoor  
Indoor desk mtd.  
Wall mtd.

- a) Name of the manufacturer :
- b) Type and manufacturer's catalogue no. :
- c) Material :



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet B</b>	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	3 OF 5

- d) Frequency response of : Hz  
the transmitter
- e) Receiver output : mV
- f) Receiver frequency : Hz  
response
- g) Degree of protection & :  
weather proofing  
arrangement

6.7 LOUDSPEAKERS (To be furnished Reentrant Cone  
separately for each type)

- a) Name of the manufacturer :
- b) Type and manufacturer's :  
catalogue no.
- c) Material :
- d) Degree of protection :
- e) Impedance matching volts : ohm  
(Transformer details)
- f) Output power
- i. rms : Watt  
ii. Peak : Watt
- g) Frequency response : Hz
- h) Cut-off frequency : Hz
- i) Sound level at 1000 Hz :  
db/watt mtr. distance
- j) Bell diameter : mm
- k) Acoustic length : mm

6.8 JUNCTION BOX

- a) Name of the manufacturer :
- b) Type :



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet B</b>	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	4 OF 5

- c) Construction :
- d) Material :
- e) Sheet steel thickness : mm
- f) Number of ways :
- g) Degree of protection :

#### 6.9 MAIN DISTRIBUTION BOX/ MAIN JUNCTION BOX

- a) Name of the manufacturer :
- b) Type :
- c) Construction :
- d) Material :
- e) Sheet steel thickness : mm
- f) Number of ways :
- g) Degree of protection :

6.10 Required Scheme as per section D  
 Scheme I [ ]                      Scheme II [ ]

#### 6.16 COMMON REQUIREMENTS OF VARIOUS EQUIPMENTS

##### 6.16.1 Surface Treatment

- a) If painted;
  - i. Application :
  - ii. Colour of paint
    - 1. Inside :
    - 2. Outside :
  - iii. Minimum thickness : microns
- b) If galvanized;
  - i. Method :
  - ii. Applicable Standard :



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet B</b>	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	5 OF 5

iii. Minimum thickness : microns  
of zinc deposit on  
all points

iv. Weight of zinc :  $g/m^2$

#### 6.16.2 Labels

a) Material :  Anodised Aluminium  
 Stainless Steel

#### 7.0 LIST OF SPARES (Bidder to furnish the lists)

a) O&M Spares list enclosed :  Yes  No

#### 8.0 DOCUMENTATION

Whether following enclosed with the bid :

a) Data Sheet B. :  Yes  No

b) Description and design of the system and other equipment. :  Yes  No

c) Two sets of descriptive pamphlets, giving all information regarding the various modules/ unit components used in the system and other equipment. :  Yes  No

d) Compliance to Standard Quality Plan (enclosed in Vol II). :  Yes  No

e) Field Quality Plan for quality checks to be observed at site during erection, testing & commissioning. :  Yes  No

f) AC power requirements of the system :  Yes  No

g) Block cable diagram showing the inter-connection between main distribution box, master station, handset stations, loud speakers , & JB's covering the size of cables. :  Yes  No

h) Test certificates for equipment of similar design. :  Yes  No

i) Clausewise deviations, if any. :  Yes  No



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  Datasheet C	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	1 OF 6

S.NO.	DESCRIPTION	PARTICULARS	UNIT
1.0	SYSTEM DESIGN DATA		
1.1	Design ambient temperature	:	°C
2.0	APPLICABLE STANDARDS		
2.1	Whether all standards specified in Annexure I of Data Sheet A followed	: <input type="checkbox"/> Yes <input type="checkbox"/> No	
3.0	COMPLETE SYSTEM REQUIREMENTS		
	a) Frequency response	:	Hz
	b) Hum & noise level or signal to noise level	:	
4.0	SCOPE OF SYSTEM DESIGN ENGINEERING	: <input type="checkbox"/> Included <input type="checkbox"/> Excluded	
5.0	POWER SUPPLY		
5.1	Whether the system suitable for operation for power supply details given in specification and Data Sheet A.	: <input type="checkbox"/> Yes <input type="checkbox"/> No	
5.2	Power supply requirement at 240V AC	:	kVA
6.0	CONSTRUCTIONAL REQUIREMENTS		
6.1	AMPLIFIERS (To be furnished separately for each type of amplifier)	: Pre-Amplifier      Line Amplifier      Loud Speaker Amplifier	
	a) Name of the manufacturer	:	
	b) Type and manufacturer's catalogue no.	:	
	c) Power supply details	:	
	d) Full load consumption(VA)	:	
	e) Rated load/ (W/Ohm) output impedance	:	
	f) Max. ambient conditions	:	
	g) Output voltage (V)	:	
	h) Frequency response (Hz)	:	
	i) Total harmonic (%)	:	
	j) Noise level (db)	:	
	k) Power band width (Hz)	:	
	l) Construction	:	
	m) Controls provided	:	
	i. Cont. variable volume control	: <input type="checkbox"/> Yes <input type="checkbox"/> No	



<b>TITLE</b>  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet C</b>	<b>SPECIFICATION NO.</b>	PE-TS-392-557-E-001
	<b>VOLUME</b>	IIB
	<b>SECTION</b>	D
	<b>REV</b> 0	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	2 OF 6

<b>S.NO.</b>	<b>DESCRIPTION</b>	<b>PARTICULARS</b>	<b>UNIT</b>
	ii. Standby and idle time power supply cut-off arrangement arrangement	: <input type="checkbox"/> Yes <input type="checkbox"/> No	
	iii. Bass & treble control	: <input type="checkbox"/> Yes <input type="checkbox"/> No	
	n) Sensitivity w.r.t. (mV) nominal output	:	
	o) Output connections	:	
	p) Indications	:	
<b>6.2</b>	<b>HANDSETS</b>		
<b>6.2.1</b>	<b>Master Handset Station(s)</b>		
	a) Name of the manufacturer	:	
	b) Type and manufacturer's catalogue no.	:	
	c) Material	:	
	d) Degree of protection	:	
	e) Surface treatment	:	
	f) Whether all features provided on master handset station as per specification requirements	: <input type="checkbox"/> Yes <input type="checkbox"/> No	
	g) Type of circuit protection	:	
	h) Mounting arrangement	:	
	i) Dimensions (L*D*H)	:	mm
	j) Weight	:	kg
<b>6.2.2</b>	<b>HANDSETS (To be furnished separately for each type)</b>	<b>Outdoor/ Indoor Wall mtd</b>	<b>Indoor desk mtd</b>
	a) Name of the manufacturer	:	
	b) Type and manufacturer's catalogue no.	:	
	c) Material	:	
	d) Impedance of the transmitter	:	Ohm
	e) Frequency response of the transmitter	:	Hz
	f) Impedance of the receiver	:	Ohm
	g) Receiver output	:	mV
	h) Receiver frequency response	:	Hz
	i) Details of provision for noise cancellation features	:	
	j) Details of provision for directional features	:	
	k) Whether all features provided on handset station as per	: <input type="checkbox"/> Yes <input type="checkbox"/> No	



TITLE  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet C</b>	SPECIFICATION NO.	PE-TS-392-557-E-001
	VOLUME	IIB
	SECTION	D
	REV 0	DATE 23/03/2012
	SHEET	3 OF 6

S.NO.	DESCRIPTION	PARTICULARS	UNIT
	specification requirements		
	l) Degree of protection	:	
	m) Surface treatment	:	
	n) Mounting	:	
	o) Dimension with control box (L*D*H)	:	mm
	p) Weight	:	kg
6.3	LOUDSPEAKERS (To be furnished separately for each type)	Reentrant	Cone
	a) Name of the manufacturer	:	
	b) Type and manufacturer's catalogue no.	:	
	c) Material	:	
	d) Degree of protection	:	
	e) Surface treatment		
	i. Exterior surface	:	
	ii. Interior surface	:	
	f) Impedance matching volts (Transformer details)	:	Ohm
	g) Output power		
	i. rms	:	Watt
	ii. Peak	:	Watt
	h) Frequency response	:	Hz
	i) Cut-off frequency	:	Hz
	j) Sound level at 1000 Hz db/watt mtr. distance	:	
	k) Controls provided	:	
	l) Bell diameter	:	mm
	m) Acoustic length	:	mm
	n) Dispersion angle	:	Deg.
	o) Speaker diameter	:	mm
	p) Weight	:	kg
6.4	MAIN DISTRIBUTION BOX		
	a) Name of the manufacturer	:	
	b) Type	:	
	c) Construction	:	
	d) Material	:	
	e) Sheet steel thickness	:	mm
	f) Number of ways	:	
	g) Degree of protection	:	
	h) Surface treatment	:	
	i) Dimensions (L*D*H)	:	mm
6.5	JUNCTION BOX (to be furnished separately for each type)	JB-1 JB-2	JB-3
	a) Name of the manufacturer	:	
	b) Type	:	
	c) Construction	:	
	d) Material	:	
	e) Sheet steel thickness	:	mm



<b>TITLE</b>  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet C</b>	<b>SPECIFICATION NO.</b>	PE-TS-392-557-E-001
	<b>VOLUME</b>	IIB
	<b>SECTION</b>	D
	<b>REV</b> 0	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	4 OF 6

<b>S.NO.</b>	<b>DESCRIPTION</b>	<b>PARTICULARS</b>	<b>UNIT</b>
	f) Number of ways	:	
	g) Degree of protection	:	
	h) Surface treatment	:	
	i) Dimensions (L*D*H)	:	mm
6.6	<b>COMMON REQUIREMENTS OF VARIOUS EQUIPMENTS</b>		
6.6.1	<b>Surface Treatment</b>		
	a) If painted;		
	i. Application	:	
	ii. Colour of paint	:	
	1. Inside	:	
	2. Outside	:	
	iii. Minimum thickness	:	microns
	b) If galvanized;		
	i. Method	:	
	ii. Applicable Standard	:	
	iii. Minimum thickness	:	microns
	of zinc deposit on		
	all points		
	iv. Weight of zinc	:	g/m <sup>2</sup>
6.6.2	<b>Labels</b>		
	a) Material	:	<input type="checkbox"/> Anodised Aluminium <input type="checkbox"/> Stainless Steel
6.6.3	<b>Earthing</b>		
	a) Name of the manufacturer	:	
	b) Type	:	
	c) Size	:	mm
	d) Details of earthing arrangement	:	
7.0	<b>OTHER MAJOR EQUIPMENTS OF SUPPLY</b>		
7.1	<b>CABLES (To be furnished separately for each type of cable)</b>		
7.1.1	<b>Applicable Standard</b>		
	IS:1554 Part 1 & IS:694(In general)	:	<input type="checkbox"/> Yes <input type="checkbox"/> No
7.1.2	<b>Name of the manufacturer for</b>		
	a) Power cable	:	
	b) Signal cable	:	
	c) Loud Speaker cable	:	
7.1.3	<b>Whether FRLS type cable provided for</b>		
	a) Power cable	:	<input type="checkbox"/> Yes <input type="checkbox"/> No
	b) Signal & loud speaker cable	:	<input type="checkbox"/> Yes <input type="checkbox"/> No




<b>TITLE</b>  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet C</b>	<b>SPECIFICATION NO.</b>	PE-TS-392-557-E-001	
	<b>VOLUME</b>	IIB	
	<b>SECTION</b>	D	
	<b>REV</b>	0	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	5	OF 6

<b>S.NO.</b>	<b>DESCRIPTION</b>	<b>PARTICULARS</b>	<b>UNIT</b>
7.1.4	Voltage Grade for		
	a) Power cable	:	Volts
	b) Signal & loud speaker cable	:	Volts
7.1.5	Conductor		
	a) Material		
	i. Power cable	:	
	ii. Signal & loud speaker cable	:	
	b) No. of pairs/cores, conductor cross sectional area, no. of strands and dia. of each strand for		
	i. Power cable	:	
	ii. Signal cable	:	
	iii. Loud Speaker cable	:	
7.1.6	Insulation		
	a) Material	:	
	b) Application	:	
	c) Volume resistivity	:	
7.1.7	Identification of cores/pairs		
	a) Power cables, Control cables upto 5 core & Paired cables	:	
	b) Control cables above 5 core	:	
7.1.8	Paired cables		
	a) Min. number of twists per metre for paired cables	:	
7.1.9	Inner sheath		
	a) Material	:	<input type="checkbox"/> Type ST1 <input type="checkbox"/> Type ST2
	b) Whether FRLS	:	<input type="checkbox"/> Yes <input type="checkbox"/> No
	c) Fillers provided	:	
	d) Material of filler	:	
	e) Method of application		
	i. with fillers	:	<input type="checkbox"/> Pressure Extruded <input type="checkbox"/> Vacuum Extruded
	ii. without fillers	:	
7.1.10	Armour	:	
7.1.11	Outer sheath		
	a) Material	:	<input type="checkbox"/> Type ST1 <input type="checkbox"/> Type ST2
	b) Application	:	
	c) Colour	:	
7.1.12	Characteristics of FRLS sheath		



<b>TITLE</b>  <b>PUBLIC ADDRESS SYSTEM</b>  <b>Datasheet C</b>	<b>SPECIFICATION NO.</b>	PE-TS-392-557-E-001
	<b>VOLUME</b>	IIB
	<b>SECTION</b>	D
	<b>REV</b> 0	<b>DATE</b> 23/03/2012
	<b>SHEET</b>	6 OF 6

S.NO.	DESCRIPTION	PARTICULARS	UNIT
	a) Oxygen index (min.)		
	b) Temp. index (min.)	:	
	c) Acid gas generation (max.)	:	
	d) Smoke density rating (max.)	:	
7.1.13	Progressive sequential length marking provided on outer sheath	: [ ] Yes [ ] No	
7.2	<b>CONDUITS</b>		
	a) Name of the manufacturer	:	
	b) Type	:	
	c) Gauge	:	
	d) Size	:	mm
7.3	<b>ITEMS OF SUPPLY FOR CABLING INSTALLATION WORK</b>		
7.3.1	<b>Cable Glands</b>		
	a) Type	: [ ] Single compression [ ] Double compression	
	b) Whether Nickel plating done	: [ ] Yes [ ] No	
8.0	<b>DOCUMENTATION</b>		
	Whether following documents enclosed :		
	a) Full description and design of the equipment and its operation.	: [ ] Yes [ ] No	
	b) Dimensional and mounting details of all equipments.	: [ ] Yes [ ] No	
	c) General arrangement drawings for handset station (all types), loud speakers (all types), JBs, Auto changeover Box, distribution box etc.	: [ ] Yes [ ] No	
	d) Auto changeover switching scheme.	: [ ] Yes [ ] No	
	e) Bill of quantities of cables, JB boxes, conduits etc.	: [ ] Yes [ ] No	
	f) Detailed write up on the method of testing.	: [ ] Yes [ ] No	
	g) Copies as specified in Section C of all test certificates for the tests actually conducted on the equipment.	: [ ] Yes [ ] No	
	h) Final Quality Plan (enclosed in Vol III)	: [ ] Yes [ ] No	
	i) Field quality plan	: [ ] Yes [ ] No	

	TITLE	SPECIFICATION NO.	PE-TS-392-557-E-001		
	PUBLIC ADDRESS SYSTEM	VOLUME	IIB		
		SECTION	D		
		REV	0	DATE	23/03/2012
		SHEET	1	OF	1

### **List of applicable codes & standards**

- 1.0 The equipment covered under this specification shall be designed, constructed and tested in accordance with latest revisions of applicable codes/ standards.
- 2.0 The equipments furnished under this specification shall conform to the latest revisions of the following standards.
- IS10426 PA System amplifiers-recommendations for minimum performance requirements and PA System amplifiers-recommendations for general requirements.
- IS1882 PA system-code of practice for out door installations.
- IS1881 Indoor amplifying and sound reinforcement system-code of practice for installation.
- IS1031 Method of measurements on loudspeaker and loud speakers systems.
- IS2382 Recommended mounting dimensions of loud speakers.
- IS9302 Characteristics and Methods of Measurement for sound System equipment.
- IS616 Code of safety requirement for mains operated electronic and related apparatus.
- IS7741 Specification for loudspeaker.
- IS9000 Basic environmental testing procedures for electric and electronic items.
- IS13947 Degrees of protection provided by enclosures for low voltage switchgear and control gear.
- IS9537 Specification for conduits for Electrical (Part-I, II) installation/wiring.
- The system shall be adequately protected from signal and power line noise and meet the Surge Withstand Capability (SWC) requirements of ANSI C37.90 A/IEEE standard 472-1989 equivalent.